



Contract No. 13/WSD/17

**Design, Build and Operate First Stage of Tseung Kwan O
Desalination Plant**

**Quarterly EM&A Report No.20
(Period from 1 December 2024 to 28 February
2025)**

Document No.

ASCL	/	200168078	/	QEMA20	/	3
Publisher		Project Code		Sequential No.		Revision Index

	Certified by:
Name	Toby Wan
Position	Environmental Team Leader
Signature	
Date:	18 July 2026

Our ref.: LES/J2024-01/CS/L143
Date : 21 July 2026

By Post and Email

Water Supplies Department
New Works Branch
Consultants Management Division
6/F, Sha Tin Government Offices,
1 Sheung Wo Che Road, Sha Tin,
New Territories

Attn: Mr. W.S. Wong / S K Wong

Dear Sir,

**Independent Environmental Checker (IEC) for Construction and Operation of the
First Stage Desalination Plant at Tseung Kwan O (Quotation Ref. No. TKO1/IEC/003)**

**Verification of Quarterly Environmental Monitoring and Audit (EM&A) Report No.20
(December 2024 to February 2025) V3**

Referring to the Quarterly Environmental Monitoring and Audit Report No.20 (December 2024 to February 2025)_V3 as submitted by the Environmental Team on 20 July 2026, we hereby verify the captioned report for further submission to the Director's Representative of the Project.

Should you have any queries, please contact the undersigned at 61496683, or email at serenashek@lamenviro.com.

Yours sincerely,
For and On Behalf Of
Lam Environmental Services Limited



Serena Shek
Independent Environmental Checker

Binnies (Attn.: Image Yeung)
Aurecon (Attn.: Toby Wan)

By E-mail
By E-mail

REVISION HISTORY

REV.	DESCRIPTION OF MODIFICATION	DATE
1.	1 st Issue	7/11/2025
2.	2 nd Issue	18/6/2026
3.	3 rd Issue	18/7/2026

CONTENTS

Executive Summary	1
1. Basic Project Information	6
2. Noise	11
3. Water Quality	15
4. Waste	27
5. Landfill Gas Monitoring	28
6. Summary of Exceedance, Complaint, Notification of Summons and Prosecutions	32
7. EM&A Site Inspection	34
8. Conclusions and Recommendations	35

Appendix A	Master Programme
Appendix B	Overview of Desalination Plant in Tseung Kwan O
Appendix C	Summary of Implementation Status of Environmental Mitigation
Appendix D	Water Quality Monitoring Graphical Presentation
Appendix E	Summary of Exceedances
Appendix F	Waste Flow Table
Appendix G	Complaint Log
Appendix H	Event/Action Plan for Water Quality Monitoring
Appendix I	Event/Action Plan for Construction Noise Exceedance
Appendix J	Event/Action Plan for Coral Monitoring Exceedance

EXECUTIVE SUMMARY

INTRODUCTION

- A1. The Project, Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant (TKODP), is a Designated Project under the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO) and is currently governed by a Further Environmental Permit (EP No. FEP – 01/503/2015/B) for the construction and operation of the Contract.
- A2. In accordance with the Environmental Monitoring and Audit (EM&A) Manual for the Contract, EM&A works for marine water quality, noise, waste management and ecology should be carried out by Environmental Team (ET), Acuity Sustainability Consulting Limited (ASCL), during the construction phase of the Contract.
- A3. According to the contractor's information, the works of TKODP were substantially completed on 30 June 2024 and the plant commenced the operation phase on 1 July 2024. The outstanding construction works were being carried out during this reporting period.
- A4. This is the 20th Quarterly EM&A Report, prepared by ASCL, for the Contract summarizing the monitoring results and audit findings of the EM&A programme at and around Tseung Kwan O Area 137 (TKO 137) during the reporting period from 1 December 2024 to 28 February 2025.
- A5. The EM&A programme for this contract has covered environmental monitoring on construction noise level at selected NSRs and Contractor's environmental performance auditing in the aspects of construction dust, construction noise, water quality, waste management, Landscape and Visual and Ecology.

SUMMARY OF MAIN WORKS UNDERTAKEN & KEY MITIGATION MEASURES IMPLEMENTED

- A6. Key activities carried out in this reporting period for the Project included the followings:
- Potable Water Production
- A7. During this reporting period, no major construction activities were undertaken under the Contract.
- A8. The key environmental mitigation measures implemented for the Contract in this reporting period include:
- Regularly monitoring of the effluent quality
 - Sorting and storage of general refuse and operation waste

SUMMARY OF EXCEEDANCE & INVESTIGATION & FOLLOW-UP

- A9. No noise monitoring was conducted during the reporting period since there are no project-related construction activities undertaken within a radius of 300m from the monitoring locations. No exceedance of the Action Level was recorded during the reporting period.

- A10. Referring to EM&A Manual, general water quality monitoring should be carried out when there are marine-related construction activities undertaken. General water quality monitoring at the ten monitoring stations (CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36 and WSR37) ceased from 1 September 2023 due to the completion of marine-related construction works.
- A11. The operation phase water quality was conducted from 1 December 2024 to 28 February 2025. Forty-one (41) of the operation phase water quality monitoring results of SS obtained had exceeded the Action Level. Sixty-eight (68) of the operation phase water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. After investigation, all exceedances were concluded unrelated to the Project.
- A12. The continuous monitoring of effluent quality was conducted from 1 December 2024 to 28 February 2025 in accordance with the EM&A Manual. No exceedance of the sampling was obtained during the reporting period had exceeded the Limit Level.
- A13. According to the Contractors, all pits or trenches were backfilled and undergo reinstatement. No landfill gas monitoring was carried out. The construction phase landfill gas monitoring was ceased from 31 October 2024.
- A14. In this reporting period, Operation Phase landfill gas monitoring was conducted on 10 and 11 December 2024, 8 and 9 January 2025 and 13 and 14 February respectively. No exceedances of action level and limit level was observed.
- A15. Due to the suspension of production at the plant, there was no effluent discharge from the TKODP during the periods listed below:
- From 12 a.m. on 1 December 2024 to 10 a.m. on 5 December 2024
 - From 10 p.m. on 5 December 2024 to 10 a.m. on 6 December 2024
 - From 10 p.m. on 9 December 2024 to 10 a.m. on 10 December 2024
 - From 10 p.m. on 10 December 2024 to 10 a.m. on 11 December 2024
 - From 10 p.m. on 16 December 2024 to 10 a.m. on 23 December 2024
 - From 8 p.m. on 23 December 2024 to 2 p.m. on 27 December 2024
 - From 9 p.m. on 8 January 2025 to 11 p.m. on 8 January 2025
 - From 10 a.m. on 13 January 2025 to 8 a.m. on 14 January 2025
 - From 8 a.m. on 16 January 2025 to 12 a.m. on 16 January 2025
 - From 6 p.m. on 24 January 2025 to 10 a.m. on 27 January 2025
 - From 3 p.m. on 2 February 2025 to 5 p.m. on 2 February 2025
 - From 10 p.m. on 8 February 2025 to 10 a.m. on 10 February 2025
 - From 11 a.m. on 11 February 2025 to 12 p.m. on 12 February 2025
 - From 6 a.m. on 14 February 2025 to 8 a.m. on 14 February 2025
 - From 12 p.m. on 15 February 2025 to 10 a.m. on 17 February 2025
 - From 3 p.m. on 27 February 2025 to 5 a.m. on 27 February 2025

Therefore, the effluent sampling was suspended on 1, 2, 3, 4, 17, 18, 19, 20, 22, 24, 25

and 26 December 2024, 13, 14, 25 and 26 January 2025, 9, 11, 15 and 16 February 2025 respectively.

- A16. Operation phase monthly coral monitoring was conducted during the reporting period on **18 December 2024, 20 January 2025 and 20 February 2025 respectively**. There is no AL/LL exceedance during the monitoring period.
- A17. Operation phase fishery monitoring for **dry season 2025** was carried out on **15 and 19 March 2025**. The details of the monitoring were presented in the **11th** Operation Phase Monthly EM&A Report.
- A18. Total **thirteen (13)** Weekly site inspections of the construction works were also carried out by ET to audit the mitigation measures implementation status. **Three (3)** Joint site inspections were carried out by ET and IEC during the reporting period.
- A19. A summary of the EM&A activities in this reporting period is listed in **Table I** and summary of the environmental exceedance of the reporting period is tabulated in **Table II**.

Table I Summary Table for EM&A Activities in the Reporting Period

EM&A Activities	Dec 2024	Jan 2025	Feb 2025
Noise Monitoring	N/A	N/A	N/A
Water Quality Monitoring	3, 5, 7, 10, 12, 14, 17, 19, 21, 24, 26, 28 and 31 December 2024	2, 4, 7, 9, 11, 14, 16, 18, 21, 23, 25, 28 and 30 January 2025	1, 4, 6, 8, 11, 13, 15, 18, 20, 22, 25 and 27 February 2025
TRC Monitoring for Main Disinfection	N/A	N/A	N/A
Coral Monitoring	18 December 2024	20 January 2025	20 February 2025
Fishery Monitoring	N/A	N/A	N/A
Landfill Gas Monitoring (Construction Phase)	N/A	N/A	N/A
Landfill Gas Monitoring (Operation Phase)	10 and 11 December 2024	8 and 9 January 2025	13 and 14 February 2025
Environmental Site Inspection	3, 10, 18, 23 and 31 December 2024	7, 14, 21 and 27 January 2025	5, 11, 18 and 25 February 2025
Continuous Monitoring of Effluent Quality	From 1 to 31 December 2024	From 1 to 31 January 2025	From 1 to 28 February 2025

Table II Summary Table for Exceedance in the Reporting Period

Environmental Monitoring	Parameter	No. of non-Project related exceedance		Total No. of non-Project related exceedance	No. of Project related exceedance		Total No. of Project related exceedance
		AL	LL		AL	LL	
Noise	L _{eq} (30min)	N/A	N/A	N/A	N/A	N/A	N/A
Water	DO	0	0	0	0	0	0
	Turbidity	0	0	0	0	0	0
	SS	41	68	109	0	0	0
	pH	0	0	0	0	0	0
	Salinity	0	0	0	0	0	0
	TRC	0	0	0	0	0	0
Landfill Gas	O ₂	0	0	0	0	0	0
	CH ₄	0	0	0	0	0	0
	CO ₂	0	0	0	0	0	0
Continuous Monitoring of Effluent Quality	Temperature	0	0	0	0	0	0
	pH	0	0	0	0	0	0
	Salinity	0	0	0	0	0	0
	Total Residual Chlorine	0	0	0	0	0	0
	Suspended Solids	0	0	0	0	0	0
	Iron-Soluble	0	0	0	0	0	0
	Total Inorganic Nitrogen	0	0	0	0	0	0
	Total Phosphorus	0	0	0	0	0	0
	Sodium Metabisulphite	0	0	0	0	0	0
	Anti-scalant as Reactive Phosphorus*	0	0	0	0	0	0
Coral Monitoring	/	0	0	0	0	0	0
Fisheries Monitoring	/	N/A	N/A	N/A	N/A	N/A	N/A

*Remark: Anti-scalant water quality testing will only be conducted whenever anti-scalant dosage is adopted.

COMPLAINT HANDLING AND PROSECUTION

A20. No environmental complaint was received during the reporting period. No notifications of summons or prosecution was received during the reporting period.

REPORTING CHANGE

A21. There was no change to be reported that may affect the on-going EM&A programme.

A22. According to the contractor's information, the works of TKODP were substantially completed on 30 June 2024 and the plant commenced the operation phase on 1 July 2024. The outstanding construction works were being carried out during this reporting period. Detail of the construction phase monitoring have been presented in the relevant monthly EM&A reports.

1. BASIC PROJECT INFORMATION

1.1. BACKGROUND

The Acciona Agua, S.A. Trading, Jardine Engineering Corporation Limited and China State Construction Engineering (Hong Kong) Limited and as AJC Joint Venture (AJCJV) is contracted to carry out the Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant (TKODP) under Contract No. 13/WSD/17 (the Contract).

Acuity Sustainability Consulting Limited (ASCL) is commissioned by AJCJV to undertake the Environmental Team (ET) services as required and/or implied, both explicitly and implicitly, in the Environmental Permit (EP), Environmental Impact Assessment Report (EIA Report) (Register No. AEIAR-192/2015) and Environmental Monitoring and Audit Manual (EM&A Manual) for the Contract; and to carry out the Environmental Monitoring and Audit (EM&A) programme in fulfillment of the EIA Report's EM&A requirements and Contract No. 13/WSD/17 Specification requirements.

Pursuant to the Environmental Impact Assessment Ordinance (EIAO), the Director of Environmental Protection granted the Environmental Permit (No. EP-01/503/2015) and Variation of Environmental Permit (No. EP-01/503/2015/B) to Water Supplies Department (WSD); and granted the Further Environmental Permit (No. FEP-01/503/2015/B) to AJCJV for the Contract.

1.2. THE REPORTING SCOPE

This is the 20th Quarterly EM&A Report for the Project which summarizes the key findings of the EM&A programme during the reporting period from 1 December 2024 to 28 February 2025.

1.3. PROJECT ORGANIZATION

The Project Organization structure for Construction Phase is presented in **Figure 1.1**.

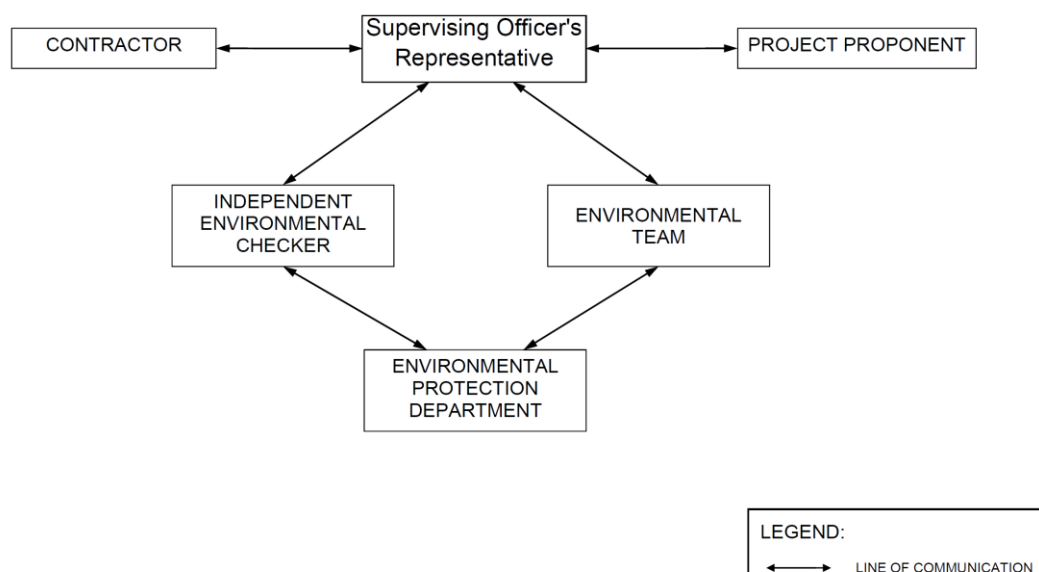


Figure 1.1 Project Organization Chart

Contact details of the key personnel are presented in **Table 1.1** below:

Table 1.1 Contact Details of Key Personnel

Party	Position	Name	Telephone no.	Remark
Project Proponent	SE/CM2	Milton Law	2634-3573	/
Supervising Officer (Binnies Hong Kong Limited)	Project Manager	Christina Ko	2608-7302	Until December 2024
	Project Manager	Augustine Li	2608-7671	/
	Senior Resident Engineer	Mason Pau	6765-4131	On the position from January 2025
	Chief Resident Engineer	David Wong	5229-8638	On the position from August 2024 to January 2025
The Jardine Engineering Corporation, Limited, China State Construction Engineering (Hong Kong) Limited and Acciona Agua, S.A. Trading	Project Manager	Stephen Yeung	2807-4665	Until December 2024
	Operation Manager / Project Manager	Arnes Parra, Victor	6468-6710	/
	Environmental Monitoring Manager	Brian Kam	9456-9541	/
	Environmental Monitoring Manager	Tommy Law	6468-1782	/
Aurecon Hong Kong Limited	Environmental Team Leader	Toby Wan	9719-5422	/
Lam Environmental Services Limited	Independent Environmental Checker (IEC)	Serena Shek	6149-6683	/

1.4. SUMMARY OF CONSTRUCTION WORKS

No major construction work activities undertaken in this reporting period for the Contract, therefore it is considered that no significant adverse environmental impacts are expected. The construction programme is presented in **Appendix A**.

1.5. SUMMARY OF ENVIRONMENTAL STATUS

A summary of the valid permits, licences, and /or notifications on environmental protection for this Project is presented in **Table 1.2**.

Table 1.2 Summary of the Status of Valid Environmental Licence, Notification, Permit and Documentations

Permit/ Licences	Valid Period		Status	Remark
	From	To		
Environmental Permit				
EP – 503/2015/B	Throughout the Contract		Valid	-Issued on 3 April 2024
FEP – 01/503/2015/B	Throughout the Contract		Valid	-Issued on 3 April 2024
Notification of Construction Works under the Air Pollution Control (Construction Dust) Regulation (Form NA)				
451539	Throughout the Contract		Valid	-
Billing Account for Disposal of Construction Waste				
7036276	Throughout the Contract		Valid	-
Sludge (Special Waste) Disposal (Admission Ticket)				
17913	01/07/2024	31/12/2024	Valid	-
101428	01/01/2025	30/06/2025	Valid	-
Chemical Waste Producer Registration				
5213-839-A2987-01	Throughout the Contract		Valid	-
Wastewater Discharge Licence (Land and Marine works)				
WT00035775-2020	23/08/2021	31/07/2025	Valid	-
WT00044188-2023	16/06/2023	30/06/2028	Valid	- For Plant T&C and operation. - Variation of sampling point S.P.1 is approved by the EPD on 25 June 2024. (EPD ref.: EP640/W3/D1358/462874).
Construction Noise Permit				
GW-RE0667-24	22/06/2024	20/12/2024	Valid	-

The status for all environmental aspects is presented in **Table 1.3**

Table 1.3 Summary of Status for Key Environmental Aspects under the EM&A Manual

Parameters	Status
Water Quality	
Baseline Monitoring under EM&A Manual	The baseline water quality monitoring was conducted between 12 May 2020 and 6 June 2020
Construction Phase Impact Monitoring	Ceased from 1 September 2023
TRC Monitoring for Main Disinfection	Completed
Operation Phase Impact Monitoring	On-going
Continuous Monitoring of Effluent Quality	On-going, the plant was shut down from 7 a.m. to 7 p.m. on 3 November 2024. No effluent discharge from TKODP occurred during this period. Due to the plant has suspended production, there was no effluent discharge from the TKODP during the period between 24 November 2024 and 30 November 2024.
Noise	
Baseline Monitoring	The baseline noise monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4
Impact Monitoring	Completed
Waste Management	
Mitigation Measures in Waste Management Plan	On-going
Landfill Gas	
(Construction Phase) Regular Monitoring when Construction Works are within the 250m Consultation Zone	Construction Phase landfill gas monitoring were ceased from 31 October 2024.
(Operation Phase) Monthly Monitoring for buildings, manholes and utility pits within the Project Site and along the fresh water mains	In this reporting period, Operation Phase landfill gas monitoring was conducted on 10 and 11 December 2024 , 8 and 9 January 2025 and 13 and 14 February 2025 respectively. No exceedances of action level and limit level was observed.
Ecology (Coral)	
Operation phase Regular Coral Monitoring (Monthly)	Operation phase coral monitoring works was conducted on 10 and 11 December 2024 , 8 and 9 January 2025 and 13 and 14 February 2025 respectively. There is no AL/LL exceedance during the monitoring period.
Ecology (Fishery)	
Operation phase Regular Fishery Monitoring (Seasonally)	Operation phase fishery monitoring for wet season 2024 was carried out on 24 and 31 August 2024 .

Parameters	Status
Ecology (Landscape)	
Operation phase Landscape and Visual Site Inspection	On-going
Environmental Audit	
Site Inspection covering Measures of Air Quality, Noise Impact, Water Quality, Waste, Ecological Quality, Fisheries, Landscape and Visual	On-going

Other than the EM&A work by ET, environmental briefings, trainings and regular environmental management meetings were conducted, in order to enhance environmental awareness and closely monitor the environmental performance of the contractors.

The EM&A programme has been implemented in accordance with the recommendations presented in the approved EIA Report and the EM&A Manual. A summary of implementation status of the environmental mitigation measures for the construction phase and operation phase of the Project during the reporting period is provided in **Appendix C**.

2. NOISE

2.1. MONITORING REQUIREMENTS

To ensure no adverse noise impact, construction noise monitoring is recommended to be carried out within 300m radius from the nearby noise sensitive receivers (NSRs), during construction phase. The NSRs selected as monitoring station are (i) NSR4 – Creative Secondary School, (ii) NSR24 – PLK Laws Foundation College, and (iii) NSR31 – School of Continuing and Professional Studies – CUHK respectively.

No impact construction noise monitoring was conducted in the reporting period due to the overly distant monitoring station from the works location, where they were farther than 1 km from the closet monitoring station NSR4 to the works location.

2.2. MONITORING PARAMETERS, FREQUENCY AND DURATION

Construction noise level would be measured in terms of the A-weighted equivalent continuous sound pressure level (LAeq). Leq_{30min} was used as the monitoring parameter for the time period between 0700 and 1900 on normal weekdays. **Table 2.1** summarizes the monitoring parameters, frequency and duration of the impact noise monitoring.

Table 2.1 Noise Monitoring Parameters, Time, Frequency and Duration

Time	Duration	Interval	Parameters
Daytime: 0700-1900	Day time: 0700-1900 (during normal weekdays)	Continuously in Leq 5min/Leq 30min (average of 6 consecutive Leq 5min)	Leq 30min L ₁₀ 30min & L ₉₀ 30min

2.3. MONITORING LOCATIONS

The monitoring locations should normally be made at a point 1m from the exterior of the NSRs building façade and be at a position 1.2m above the ground. A correction of +3dB(A) should be made to the free-field measurements.

According to the environmental findings detailed in the EIA report and Baseline Monitoring Report, the designated locations for the construction noise monitoring are listed in **Table 2.2** below.

Table 2.2 Noise Sensitive Receivers

NSR ID	Noise Sensitive Receivers	Monitoring Location	Position
NSR 4	Creative Secondary School	Roof Floor	1 m from facade
NSR 24	PLK Laws Foundation College	Pedestrian Road on Ground Floor	Free-field
NSR 31	School of Continuing and Professional Studies - CUHK	Roof Floor	1 m from facade

The monitoring locations should normally be made at a point 1m from the exterior of the NSRs building façade and be at a position 1.2m above the ground. A correction of +3dB(A) should be made to the free-field measurements. Three noise monitoring locations for impact monitoring at the nearby sensitive receivers are shown in **Figure 2.1-2.3**.

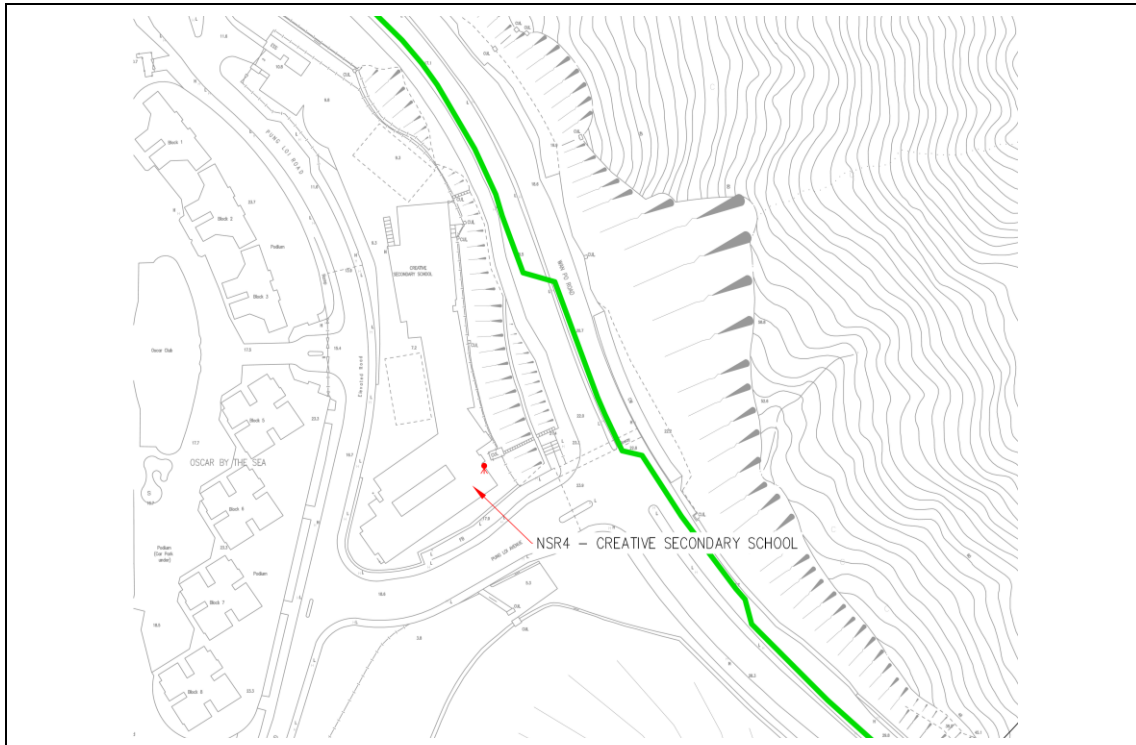


Figure 2.1 NSR4 Creative Secondary School


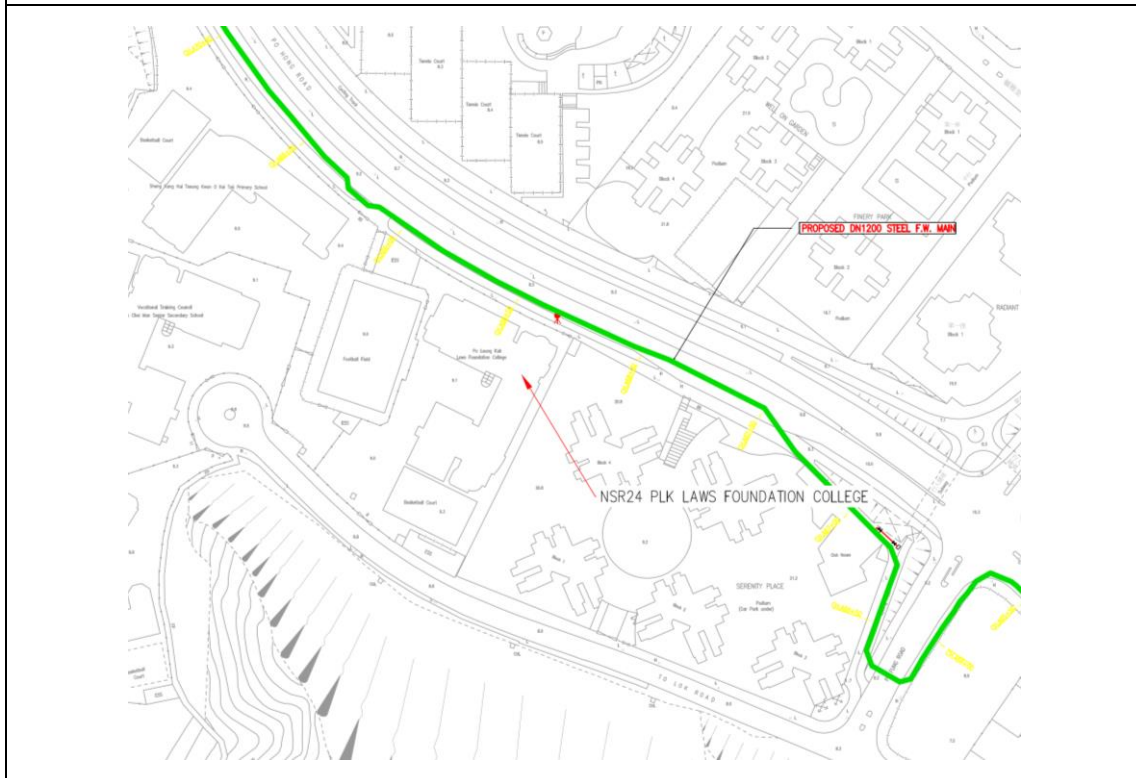


Figure 2.2 NSR24 PLK Laws Foundation College

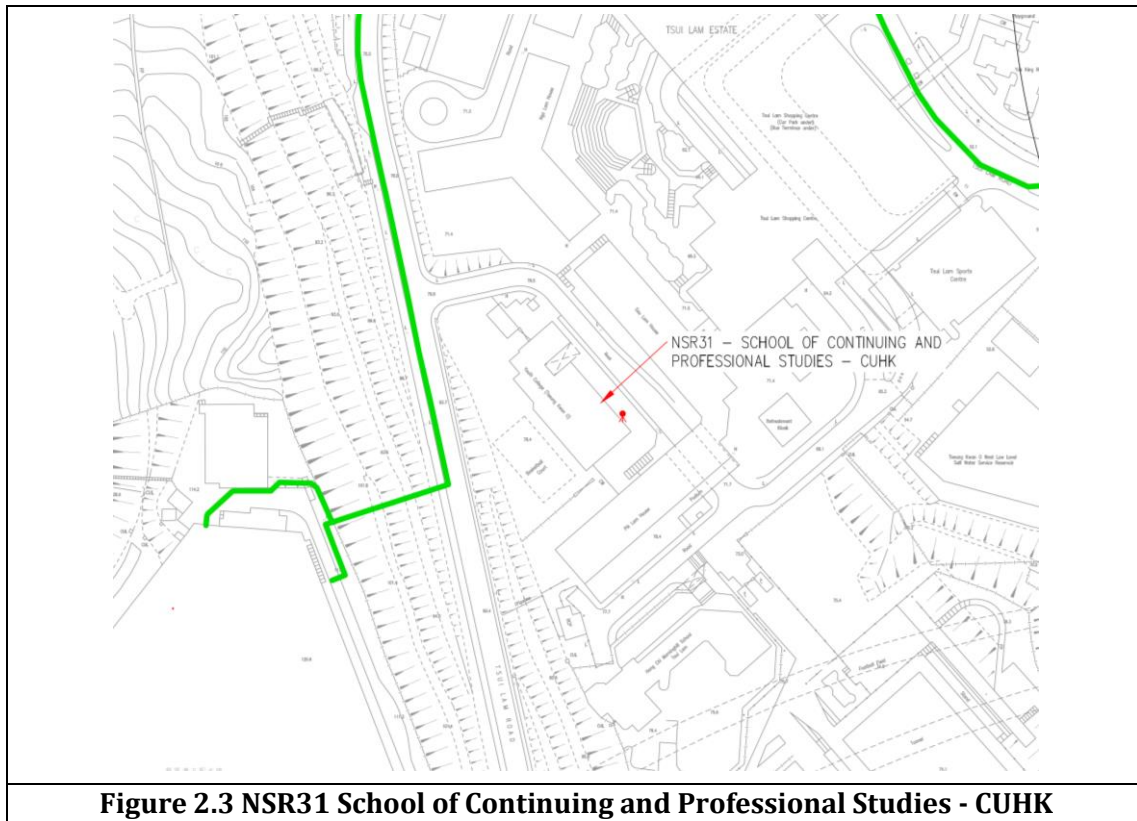

2.4. ACTION AND LIMIT LEVELS

The Action/Limit Levels are in line with the criteria of Practice Note for Professional Persons (ProPECC PN 2/93) “Noise from Construction Activities – Non-statutory Controls” and Technical Memorandum on Environmental Impact Assessment Process issued by HKSAR Environmental Protection Department [“EPD”] under the Environmental Impact Assessment Ordinance, Cap 499, S.16 are presented in **Table 2.3**.

Table 2.3 Action and Limit Levels for Construction Noise Monitoring per EM&A Manual

Time Period	Action Level	Limit Level (dB(A))
0700-1900 on normal weekdays	When one documented complaint is received from any one of the noise sensitive receivers	70 dB(A) for school and 65 dB(A) during examination period

Notes: Limits specified in the GW-TM and IND-TM for construction and operation noise, respectively.

If exceedances were found during noise monitoring, the actions in accordance with the Event and Action Plan shall be carried out according to **Appendix E**.

2.5. MONITORING RESULTS AND OBSERVATIONS

Referring to EM&A manual Section 4.1.2, the impact noise monitoring should be carried out when there are project-related construction activities undertaken within a radius of 300m from the monitoring stations. As no Contract-related construction activities were undertaken in the reporting period within a radius of 300m from the monitoring stations of the Project site as shown in **Figure 2.4**, no impact noise monitoring was conducted in the reporting period.

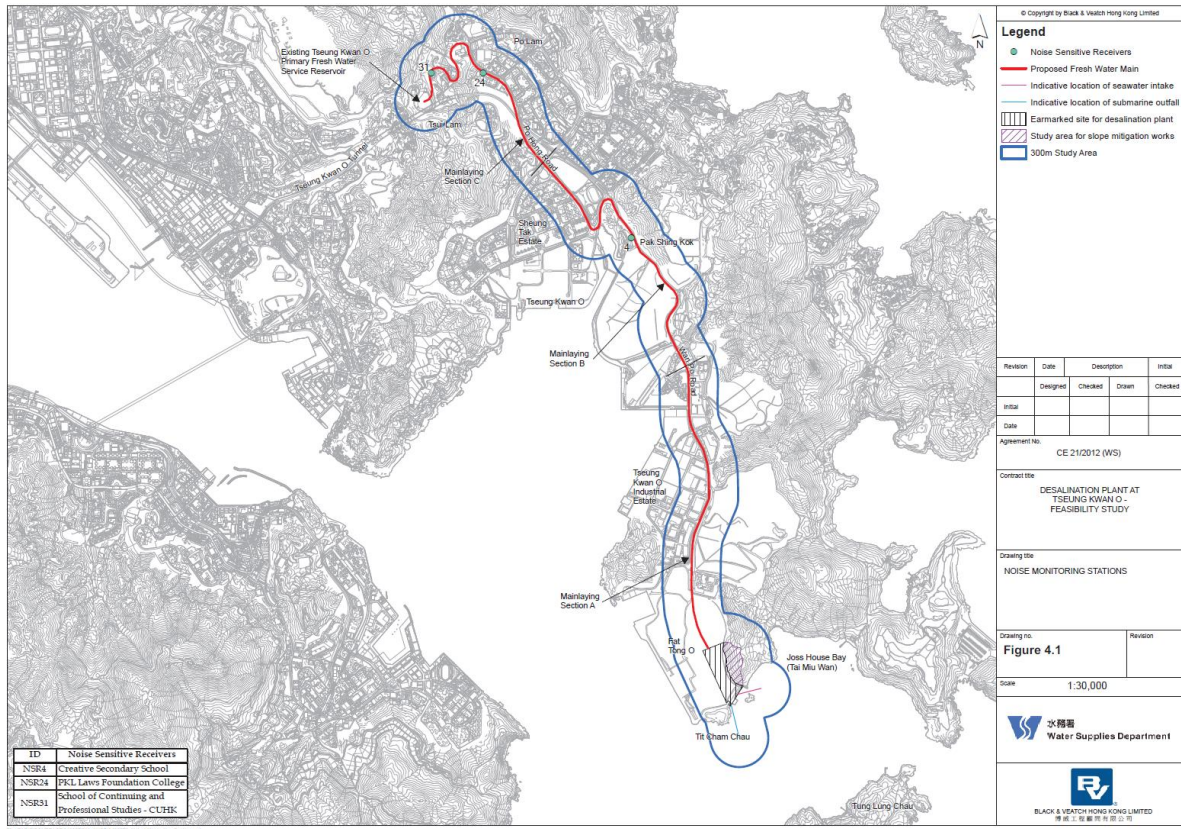


Figure 2.4 Site Layout Plan with Noise Sensitive Receivers and Desalination Plant

3. WATER QUALITY

In accordance with the recommendations of the EIA, water quality monitoring is required during dredging for the submarine pipelines and, during operation phase. In addition, baseline water quality monitoring was conducted prior to the commencement of marine construction activities.

The following Section provides details of the water quality monitoring to be undertaken by the Environmental Team (ET) to verify the distance of sediment and brine plume dispersion and to identify whether the potential exists for any indirect impacts to occur to ecological sensitive receivers. The water quality monitoring programme was carried out to allow any deteriorating water quality to be readily detected and timely action taken to rectify the situation.

Water quality monitoring for the Project can be divided into the following stages:

- Dredging activities during construction phase;
- Discharge of effluent from main disinfection during construction phase;
- Operation phase – first year upon operation; and,
- Continuous monitoring of effluent quality.

3.1. WATER QUALITY PARAMETERS

Parameters to be measured in the marine water quality monitoring and the Continuous Monitoring of Effluent Quality are listed in Table 3.1 and Table 3.2 respectively.

a) Operation phase Marine Water Quality Monitoring

The parameters that have been selected for measurement in situ and in the laboratory are those that were either determined in the EIA to be those with the most potential to be affected by the operation works or are a standard check on water quality conditions. Parameters measured in the monitoring are listed in **Table 3.1**

Table 3.1 Parameters measured in the marine water quality monitoring

Parameters	Unit	Abbreviation
In-situ measurements		
Dissolved oxygen	mg/L	DO
Temperature	°C	-
pH	pH	-
Turbidity	NTU	-
Salinity	‰	-
Total Residual Chlorine	mg/L	TRC
Total Residual Chlorine (Disinfection)	mg/L	TRC
Laboratory measurements		
Suspended Solids	mg/L	SS
Iron	mg/L	
Anti-scalant	mg/L	-

NOTE 1: Monitoring of Total Residual Chlorine (Disinfection) will be conducted when cleaning and sterilization of the new freshwater main is carried out.

b) Continuous Monitoring of Effluent Quality

The monitoring requirement for the continuous effluent quality monitoring shall be conducted in accordance with the effluent parameters and standards stipulated by the Water Pollution Control Ordinance Discharge License (No.: WT00044188-2023) conditions.

Table 3.2 Parameters measured in the Continuous Monitoring of Effluent Quality

Parameters	Unit	Abbreviation
In-situ measurements		
Temperature	°C	-
pH	pH	-
Salinity	0/00	-
Total Residual Chlorine	mg/L	TRC
Laboratory measurements		
Suspended Solids	mg/L	SS
Iron-Soluble	mg/L	Fe
Total Inorganic Nitrogen	mg/L	-
Total Phosphorus	mg/L	-
Sodium Metabisulphite	mg/L	SMBS
Anti-scalant as Reactive Phosphorus *	mg/L	PO4 as P-

*Remark: Anti-scalant water quality testing will only be conducted whenever anti-scalant dosage is adopted.

In addition to the water quality parameters, other relevant data were measured and recorded in Water Quality Monitoring Logs, including the location of the sampling stations, water depth, time, weather conditions, sea conditions, tidal stage, current direction and velocity, special phenomena and work activities undertaken around the monitoring and works area that may influence the monitoring results.

3.2. MONITORING LOCATIONS

a) Operation phase Marine Water Quality Monitoring

The water quality monitoring locations are detailed in **Table 3.2** and shown in **Figure 3.1** below.

Table 3.3 Location of Water Quality Monitoring Station

Station	Easting	Northing	Description
CE	843550	815243	Upstream control station at ebb tide
CF	846843	810193	Upstream control station at flood tide
WSR1	846864	812014	Ecological sensitive receiver at Tung Lung Chau
WSR2	847645	812993	Fisheries sensitive receiver at Tung Lung Chau
WSR3	848023	813262	Ecological sensitive receiver at Tung Lung Chau
WSR4	847886	814154	Ecological sensitive receiver at Tai Miu Wan

WSR16	845039	815287	Ecological sensitive receiver at Fat Tong Chau
WSR33	847159	814488	Ecological sensitive receiver at Tai Miu Wan
WSR36	846878	814081	Ecological sensitive receiver at Kwun Tsai
WSR37	846655	813810	Ecological sensitive receiver at Tit Cham Chau
NF1	846542	813614	Edge of mixing zone, ~ 200m west of outfall diffuser
NF2	846942	813614	Edge of mixing zone, ~ 200m east of outfall diffuser
NF3	846742	813414	Edge of mixing zone, ~ 200m south of outfall diffuser

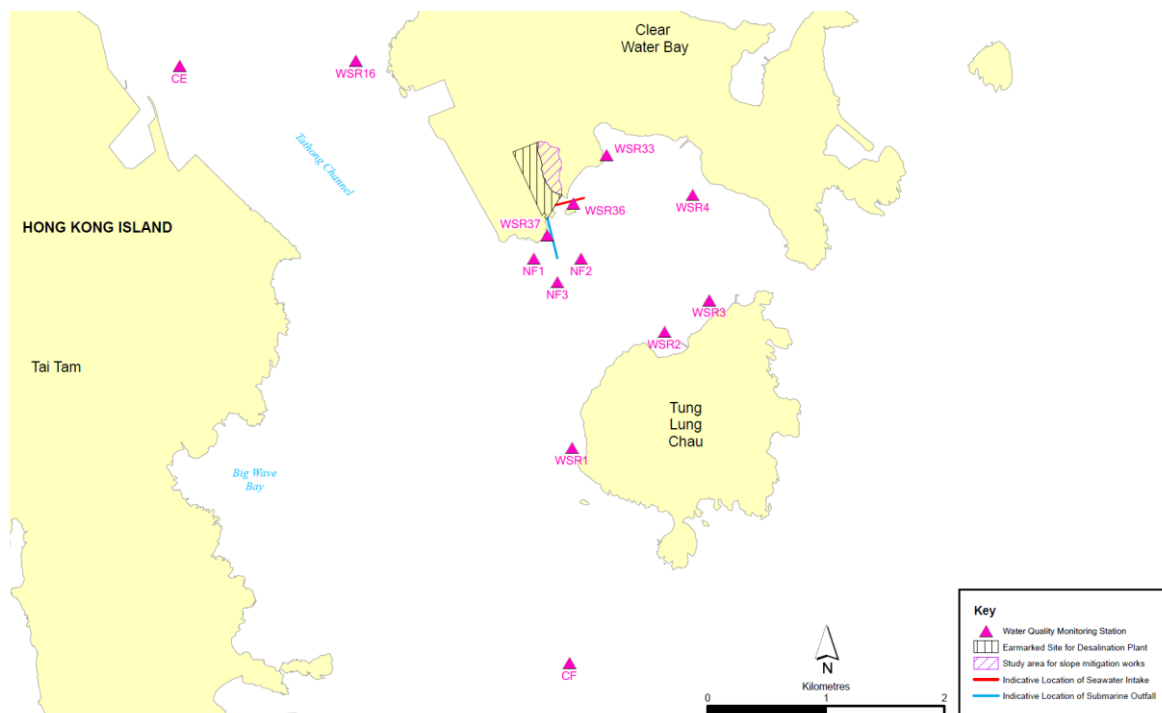


Figure 3.1 Water Quality Monitoring Locations under EM&A Manual

b) Continuous Monitoring of Effluent Quality

In accordance with the discharge license, the Continuous Monitoring shall be sampling at Brine Outfall Shaft.

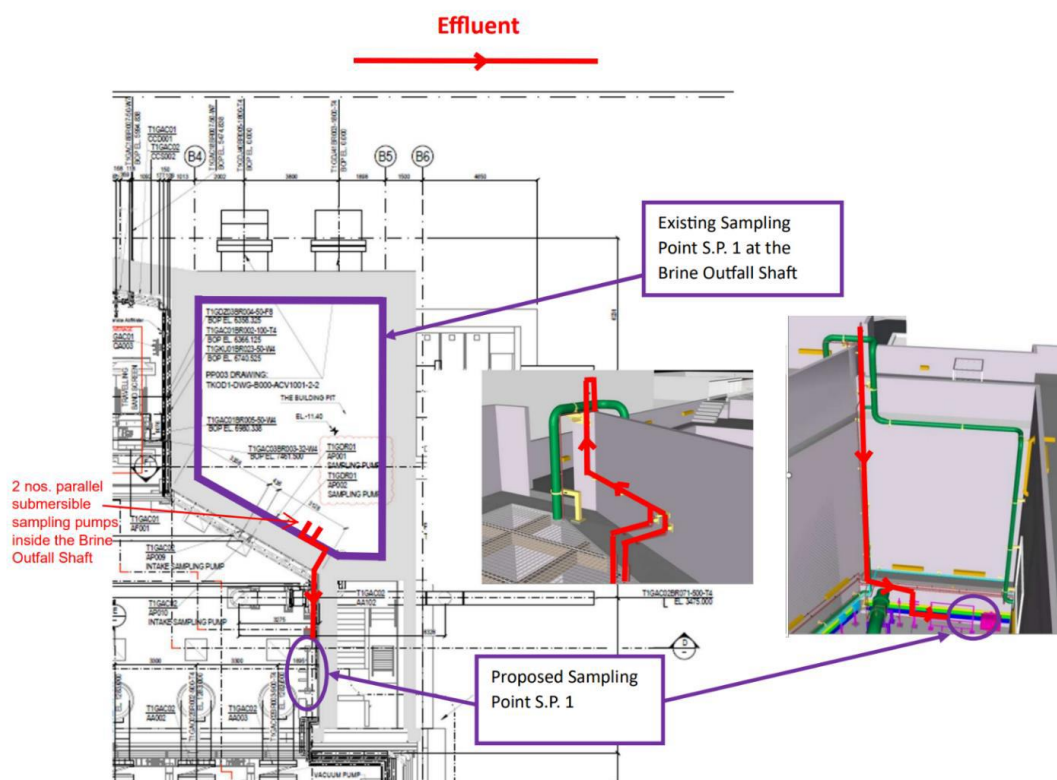


Figure 3.2 Continuous Monitoring locations

3.3. MONITORING EQUIPMENT, METHODOLOGY AND QA/QC PROCEDURES

The monitoring methodology, equipment used, and QA/QC procedures could be referred to Section 3.1.2 -3.1.4, 3.1.6-3.1.7 and 3.2 of the Monthly EM&A Report.

3.4. ACTION AND LIMIT LEVELS

The Action and Limit Levels have been set based on the derivation criteria specified in the EM&A Manual. The Action/Limit Levels have been derived and are presented in Table 3.4 and Table 3.5.

a) Operation phase Marine Water Quality Monitoring

Table 3.4 Derived Action and Limit Levels for Water Quality

Parameters	Action	Limit
Operation Phase Monitoring		
DO in mg/L	<u>Surface and Middle</u> 7.30 mg L ⁻¹ <u>Bottom</u> 7.31 mg L ⁻¹ <u>Tung Lung Chau Fish Culture Zone</u> 5.1 mgL ⁻¹ or level at control station (Whichever the lower)	<u>Surface and Middle</u> 4 mg L ⁻¹ <u>Bottom</u> 2 mg L ⁻¹ <u>Tung Lung Chau Fish Culture Zone</u> 5.0 mgL ⁻¹ or level at control station (Whichever the lower)

Parameters	Action	Limit
Operation Phase Monitoring		
SS in mg/L (Depth-averaged)	5.00 mg L ⁻¹ or 20% exceedance of value at any impact station compared with corresponding data from control station	6.00 mg L ⁻¹ or 30% exceedance of value at any impact station compared with corresponding data from control station
Turbidity in NTU (Depth-averaged)	2.41 NTU or 20% exceedance of value at any impact station compared with corresponding data from control station	2.84 NTU or 30% exceedance of value at any impact station compared with corresponding data from control station
Salinity in PSU (Depth-averaged)	34.28 PSU or 9% exceedance of value at any impact station compared with corresponding data from control station	34.60 PSU or 10% exceedance of value at any impact station compared with corresponding data from control station
Iron in mg/L (Depth-averaged)	0.3 mg/L	0.3 mg/L
Total residual chlorine in mg/L	0.01 mg/L	0.01 mg/L
Total residual chlorine in mg/L (Disinfection)	0.1 mg/L	0.1 mg/L

Notes:

- "Depth-averaged" is calculated by taking the arithmetic means of reading of all three depths.
- For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.
- For Turbidity, SS, iron and Salinity, non-compliance of the water quality limits occurs when monitoring result is higher than the limits.

b) Continuous Monitoring of Effluent Quality

Table 3.5 Derived Limit Levels for Water Quality

Parameters	Limit
Continuous Monitoring of Effluent Quality	
Flow Rate in m ³ /day	216841
Temperature in °C	Maximum 40
Salinity	71347
SS in mg/L	13
pH	6-9
Iron in mg/L	0.6
Total residual chlorine in mg/L	0.1
Total Inorganic Nitrogen in mg/L	2
Total Phosphorous in mg/L	1

Parameters	Limit
Continuous Monitoring of Effluent Quality	
Sodium Metabisulphite in mg/L	0.5
Anti scalant in mg/L*	2.2

*Remark:

1. Anti-scalant water quality testing will only be conducted whenever anti-scalant dosage is adopted.

3.5. MONITORING RESULTS AND OBSERVATIONS

Construction Phase

Referring to EM&A Manual, the general water quality monitoring should be carried out when there are marine-related construction activities undertaken. General water quality monitoring at the ten monitoring stations (CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36 and WSR37) was ceased from 1 September 2023 due to the completion of marine-related construction works.

Operation Phase

The first-year operation phase marine water quality monitoring was carried out during the reporting period, the monitoring was conducted at the thirteen monitoring stations (CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37, NF1, NF2 and NF3). The Action and Limit Level would be referred to the approved EM&A Manual Table 5.4 First-year Operation Phase Marine Water Monitoring.

The operation phase marine water quality monitoring was conducted [3, 5, 7, 10, 12, 14, 17, 19, 21, 24, 26, 28 and 31 December 2024](#), [2, 4, 7, 9, 11, 14, 16, 18, 21, 23, 25, 28 and 30 January 2025](#) and [1, 4, 6, 8, 11, 13, 15, 18, 20, 22, 25 and 27 February 2025](#). The result of the reporting quarterly is presented in **Table 3.6**. Details of water quality monitoring graphics were presented in **Appendix D**.

[Forty-one \(41\)](#) of the operation phase marine water quality monitoring results of SS obtained had exceeded the Action Level. [Sixty-eight \(68\)](#) of the operation phase water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level.

Investigation on the reason of exceedance has been carried out, where the exceedances of SS were concluded to be unrelated to the Contract as detailed in the Incident Reports on Action Level or Limit Level. Summary of the exceedance is presented in **Appendix E**.

Continuous Monitoring of Effluent Quality

Continuous Monitoring of Effluent Quality was conducted sampling point in the reporting period. [No](#) exceedance of the sampling was obtained during the reporting period had exceeded the Limit Level. The detailed results are summarized in **Table 3.7**.

Due to the suspension of production at the plant, there was no effluent discharge from the TKODP during the periods listed below:

- From 12 a.m. on 1 December 2024 to 10 a.m. on 5 December 2024
- From 10 p.m. on 5 December 2024 to 10 a.m. on 6 December 2024

- From 10 p.m. on 9 December 2024 to 10 a.m. on 10 December 2024
- From 10 p.m. on 10 December 2024 to 10 a.m. on 11 December 2024
- From 10 p.m. on 16 December 2024 to 10 a.m. on 23 December 2024
- From 8 p.m. on 23 December 2024 to 2 p.m. on 27 December 2024
- From 9 p.m. on 8 January 2025 to 11 p.m. on 8 January 2025
- From 10 a.m. on 13 January 2025 to 8 a.m. on 14 January 2025
- From 8 a.m. on 16 January 2025 to 12 a.m. on 16 January 2025
- From 6 p.m. on 24 January 2025 to 10 a.m. on 27 January 2025
- From 3 p.m. on 2 February 2025 to 5 p.m. on 2 February 2025
- From 10 p.m. on 8 February 2025 to 10 a.m. on 10 February 2025
- From 11 a.m. on 11 February 2025 to 12 p.m. on 12 February 2025
- From 6 a.m. on 14 February 2025 to 8 a.m. on 14 February 2025
- From 12 p.m. on 15 February 2025 to 10 a.m. on 17 February 2025
- From 3 p.m. on 27 February 2025 to 5 a.m. on 27 February 2025

Therefore, the effluent sampling was suspended on 1, 2, 3, 4, 17, 18, 19, 20, 22, 24, 25 and 26 December 2024, 13, 14, 25 and 26 January 2025, 9, 11, 15 and 16 February 2025 respectively.

Table 3.6 Summary of Operation Phase Water Quality Monitoring Results

Location		Parameter																										
		Salinity (ppt)			Dissolved Oxygen (mg/L)						pH			Turbidity (NTU)			Suspended Solids (mg/L)			Temp. (°C)			TRC (mg/L)			Iron (mg/L)		
					Surface & Middle			Bottom																				
		Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025
CE	Avg.	31.92	31.90	31.78	8.54	8.97	8.77	8.55	8.98	8.76	8.20	8.22	8.16	2.41	2.33	2.26	3.76	3.28	3.19	21.45	21.24	21.15	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.53	30.44	31.14	7.79	8.41	8.18	7.84	8.38	8.15	8.05	8.03	8.01	1.99	1.70	2.04	2.50	2.50	2.38	20.90	20.84	20.87	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.61	32.62	33.21	9.49	9.22	9.33	9.47	9.30	9.28	8.37	8.39	8.29	2.61	2.64	2.46	7.00	8.00	7.00	22.24	21.66	21.62	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
CF	Avg.	31.91	31.79	31.67	8.77	8.82	8.92	8.76	8.83	8.93	8.19	8.22	8.14	2.40	2.52	2.41	4.06	3.28	3.14	21.53	21.24	21.16	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.86	31.01	30.77	7.95	7.97	8.30	7.96	7.94	8.35	7.94	8.05	7.98	2.02	1.89	2.17	2.50	2.50	2.27	20.98	20.89	20.76	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	33.24	32.71	32.92	9.38	9.36	9.33	9.34	9.39	9.34	8.34	8.38	8.26	2.73	2.85	2.72	9.00	6.00	6.00	22.16	21.70	21.40	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR1	Avg.	31.95	31.69	31.63	8.71	8.71	8.78	8.73	8.74	8.78	8.12	8.18	8.15	1.81	1.69	1.86	4.22	3.60	3.52	21.53	21.29	21.13	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.99	30.59	30.72	7.95	8.13	8.28	7.97	8.05	8.26	7.94	8.02	8.04	1.20	1.25	1.52	2.50	2.50	2.05	21.04	21.04	20.73	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.92	32.62	32.35	9.25	9.41	9.51	9.33	9.46	9.47	8.34	8.37	8.28	2.19	2.24	2.19	8.00	9.00	12.00	22.30	21.70	21.44	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR2	Avg.	31.80	31.91	31.76	8.64	8.68	8.68	8.63	8.69	8.69	8.21	8.20	8.18	1.80	1.75	1.80	4.29	3.54	3.14	21.56	21.29	21.18	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.53	30.89	30.78	8.10	8.16	8.04	8.08	8.10	8.07	8.05	8.05	8.09	1.29	1.09	1.42	2.50	2.50	2.00	20.94	20.81	20.76	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.78	32.79	33.07	9.09	9.19	9.33	9.08	9.19	9.27	8.37	8.41	8.32	2.17	2.29	2.09	13.00	11.00	6.00	22.41	21.76	21.64	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR3	Avg.	31.87	31.95	31.72	8.73	8.64	8.76	8.71	8.66	8.75	8.16	8.24	8.19	1.69	1.79	1.74	4.04	3.55	3.10	21.49	21.23	21.18	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.91	30.84	30.85	8.29	8.25	8.28	8.30	8.28	8.29	7.97	8.08	8.06	1.29	1.41	1.52	2.50	2.50	1.68	20.97	20.85	20.81	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.87	32.66	32.48	9.23	9.01	9.36	9.22	8.96	9.35	8.36	8.37	8.37	2.17	2.15	2.19	8.00	8.00	6.00	22.24	21.59	21.54	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR4	Avg.	31.69	32.01	31.77	8.51	8.58	8.81	8.50	8.60	8.83	8.19	8.17	8.15	1.73	1.81	1.71	4.35	3.60	3.41	21.57	21.26	21.13	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.65	31.46	30.79	8.09	8.16	8.27	8.01	8.12	8.28	8.02	8.04	7.98	1.30	1.26	1.40	2.50	2.50	1.92	20.92	20.88	20.65	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.68	32.67	32.92	9.18	9.10	9.37	9.12	9.13	9.47	8.36	8.28	8.33	2.10	2.23	2.09	9.00	8.00	7.00	22.37	21.69	21.64	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR16	Avg.	31.77	31.76	31.78	8.48	8.96	8.83	8.49	8.96	8.85	8.16	8.21	8.17	1.76	1.79	1.74	3.94	3.38	3.33	21.49	21.20	21.12	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	31.09	30.97	31.00	8.02	8.09	8.12	8.05	8.04	8.10	7.91	8.02	7.98	1.19	1.40	1.56	2.50	2.50	1.78	20.91	20.79	20.61	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.66	33.08	32.64	9.15	9.43	9.68	9.22	9.35	9.64	8.33	8.42	8.29	2.22	2.17	2.01	8.00	8.00	8.00	22.06	21.44	21.40	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR33	Avg.	32.03	32.02	31.66	8.74	8.70	8.79	8.74	8.71	8.80	8.15	8.23	8.14	1.72	1.75	1.75	4.18	3.28	2.91	21.57	21.23	21.06	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	31.18	30.89	30.76	8.08	8.22	8.21	8.03	8.24	8.25	7.99	8.12	7.97	1.34	1.44	1.51	2.50	2.50	1.58	21.10	20.83	20.80	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	33.04	32.95	32.58	9.28	9.13	9.34	9.32	9.15	9.37	8.38	8.42	8.36	1.98	2.21	2.19	8.00	9.00	6.00	22.22	21.74	21.42	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR36	Avg.	31.85	32.11	32.05	8.50	8.61	8.82	8.49	8.59	8.82	8.15	8.18	8.17	1.70	1.71	1.85	3.78	3.56	3.29	21.52	21.26	21.17	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.75	31.47	31.29	7.83	8.02	8.39	7.82	8.01	8.43	7.99	8.03	8.07	1.26	1.21	1.56	2.50	2.50	1.76	20.97	20.76	20.55	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	33.15	32.93	33.21	9.21	9.30	9.21	9.19	9.22	9.25	8.35	8.40	8.34	2.19	2.07	2.19	8.00	7.00	8.00	22.11	21.80	21.43	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
WSR37	Avg.	32.02	31.77	31.75	8.70	8.54	8.83	8.70	8.54	8.83	8.15	8.19	8.17	1.75	1.77	1.81	4.33	3.61	3.49	21.50	21.31	21.18	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	31.04	30.95	30.87	7.99	8.13	8.22	7.97	8.11	8.21	7.93	8.02	8.03	1.29	1.51	1.50	2.50	2.50	1.91	20.86	20.89	20.85	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.71	32.56	32.88	9.24	8.91	9.74	9.28	8.96	9.69	8.25	8.34	8.28	2.05	2.16	2.12	10.00	7.00	8.00	22.16	21.72	21.53	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1

Location		Parameter																										
		Salinity (ppt)			Dissolved Oxygen (mg/L)						pH			Turbidity (NTU)			Suspended Solids (mg/L)			Temp. (°C)			TRC (mg/L)			Iron (mg/L)		
					Surface & Middle			Bottom																				
		Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025	Dec-2024	Jan-2025	Feb-2025
NF1	Avg.	31.88	31.91	31.89	8.65	8.66	8.95	8.64	8.65	8.97	8.14	8.22	8.14	1.64	1.75	1.81	4.42	3.21	2.82	21.53	21.23	21.11	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.52	31.37	30.87	8.16	8.17	8.29	8.09	8.09	8.35	7.91	8.02	7.99	1.14	1.37	1.50	2.50	2.50	0.40	21.01	20.81	20.84	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.78	32.83	32.53	9.12	9.23	9.63	9.16	9.26	9.63	8.34	8.46	8.29	2.06	2.18	2.15	9.00	9.00	6.00	22.20	21.68	21.54	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
NF2	Avg.	31.99	31.85	31.99	8.60	8.77	8.80	8.59	8.77	8.81	8.17	8.20	8.17	1.64	1.78	1.76	4.30	3.40	3.49	21.48	21.25	21.13	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.86	31.23	30.97	7.90	8.26	8.13	7.89	8.25	8.12	8.01	8.04	8.05	1.31	1.40	1.43	2.50	2.50	1.57	21.02	21.06	20.71	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	32.73	32.49	32.86	9.19	9.41	9.47	9.19	9.37	9.39	8.39	8.37	8.35	2.11	2.09	2.15	9.00	18.00	8.00	22.13	21.83	21.43	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
NF3	Avg.	31.95	31.83	31.83	8.72	8.83	8.92	8.72	8.83	8.94	8.17	8.24	8.12	1.73	1.84	1.87	4.11	3.47	3.14	21.41	21.28	21.14	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Min.	30.58	30.73	30.70	7.77	8.38	8.00	7.83	8.40	8.07	7.93	8.05	7.98	1.31	1.41	1.48	2.50	2.50	1.91	20.84	20.93	20.61	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1
	Max..	33.07	32.61	33.05	9.38	9.49	9.40	9.39	9.45	9.46	8.40	8.43	8.28	2.12	2.25	2.14	8.00	7.00	8.00	22.30	21.79	21.38	<0.01	<0.01	<0.01	<0.1	<0.1	<0.1

Table 3.7 Summary of Continuous Effluent Monitoring Results

		Salinity (ppt)	pH	Temp (°C)	Total Residual Chlorine (mg/L)	Suspended Solids (mg/L)	Total Inorganic Nitrogen (mg/L)	Total Phosphorus (mg/L)	*Sodium Metabisulphite (mg/L)	Iron (mg/L)
Dec-2024	Avg.	46.00	7.74	20.59	0.01	2	0.14	0.01	<2	<0.1
	Min.	38.35	6.38	15.90	0.00	2	0.07	0.01	<2	<0.1
	Max.	55.05	8.24	27.42	0.06	2	0.19	0.03	<2	<0.1
Jan-2025	Avg.	50.41	8.02	18.04	0.02	2	0.18	0.01	<2	<0.1
	Min.	47.18	7.55	15.53	0.00	2	0.10	0.01	<2	<0.1
	Max.	54.51	8.20	20.26	0.05	2	0.26	0.01	<2	<0.1
Feb-2025	Avg.	31.75	8.17	21.18	0.02	2	0.40	0.02	<2	<0.1
	Min.	30.87	8.03	20.85	0.00	2	0.11	0.01	<2	<0.1
	Max.	32.88	8.28	21.53	0.05	2	0.22	0.012	<2	<0.1

* Remark: As confirmed by various laboratories in Hong Kong, the lowest detection limit for Sodium Metabisulphite is <2 mg/L. Due to the limitation of the laboratory, the lowest result for Sodium Metabisulphite will only be shown as < 2 mg/L.

4. WASTE

The waste generated from this Project includes inert construction and demolition (C&D) materials, and non-inert C&D materials. Non-inert C&D materials are made up of general refuse, vegetative wastes, and recyclable wastes such as plastics and paper/cardboard packaging waste. Steel materials generated from the project are also grouped into non-inert C&D materials as the materials were not disposed of with other inert C&D materials. With reference to relevant handling records and trip tickets of this Project, the quantities of different types of waste generated in the reporting period are summarized in **Table 4.1**. Details of cumulative waste management data are presented as a waste flow table in **Appendix F**.

Table 4.1 Quantities of Waste Generated from the Project during reporting period

Reporting Months	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper / cardboard packaging	Plastics ⁽¹⁾	Chemical Waste	Others, e.g. general refuse
	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)
Dec 2024	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	1.000	31.47
Jan 2025	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	38.740
Feb 2025	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	18.330

Notes: (1) Plastics refer to plastic bottles / containers, plastic sheets / foam from packaging material

5. LANDFILL GAS MONITORING

5.1. MONITORING REQUIREMENT

In accordance with Section 11 of the EM&A Manual, monitoring of landfill gas is required for construction works within the 250m Consultation Zone. Part of the desalination plant and the indicative area of natural slope mitigation works fall within the SENT Landfill Extension Consultation Zone; and part of the 1,200 mm diameter fresh water mains along Wan Po Road falls within the SENT Landfill and SENT Landfill Extension Consultation Zones, TKO Stage II/III Restored Landfill and TKO Stage I Restored Landfill Consultation Zones.

Routine monitoring is required at buildings within the Project Site and consultation zones. The monitoring frequency will be monthly for the first year of operation.

For the manholes and utility pits within the Project Site and along the fresh water mains, each manhole/ utility pit should be monitored with two measurements (at mid depth and base). Each measurement should be monitored for a minimum of 10 minutes. A steady reading and peak reading should be recorded at each manhole/ utility pit and for each measurement.

Monitoring of oxygen, methane, carbon dioxide and barometric pressure would be performed monthly during the operation phase.

5.2. MONITORING LOCATION

Monitoring of oxygen, methane, carbon dioxide and barometric pressure was performed for excavations at 1m depth or more within the consultation Zone.

During construction of works within the consultation zones, excavations of 1m depth or more was monitored:

- At the ground surface before excavation commences;
- Immediately before any worker enters the excavation;
- At the beginning of each working day for the entire period the excavation remains open; and
- Periodically through the working day whilst workers are in the excavation.

For excavations between 300mm and 1m deep, measurements should be carried out:

- Directly after the excavation has been completed; and
- Periodically whilst the excavation remains open.

5.3. MONITORING PARAMETERS

LFG monitoring was carried out to identify any migration between the landfill and the Project and to ensure the safety of the construction, operation and maintenance personnel working on-site, visitors and any other person within the Project area.

The following parameters were monitored:

- Methane.
- Oxygen.
- Carbon Dioxide.
- Barometric Pressure.

5.4. MONITORING LOCATION

The area required to be monitored for landfill gas in the reporting period is shown in **Figure 5.1, 5.2 and 5.3.**

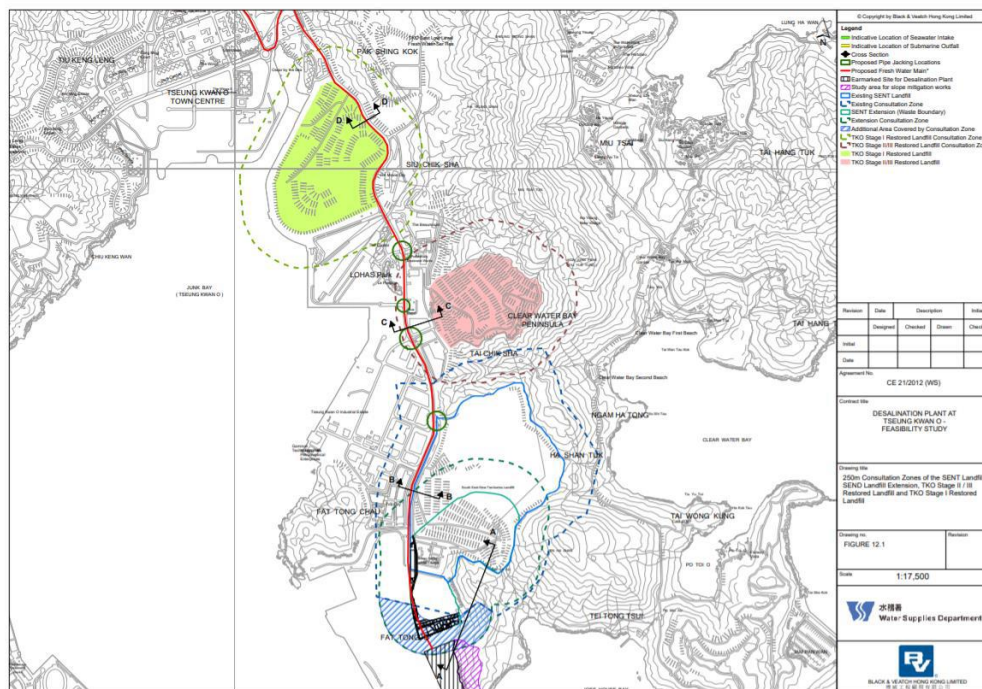


Figure 5.1 Overview of the SENT Extension Consultation Zone and the Project Site Area



5.5. ACTION AND LIMIT LEVEL

Action and Limit Level are provided in **Table 5.1**.

Table 5.1 Action and Limit Level for Landfill Gas Monitoring

Parameters	Action Level	Limit Level
Oxygen (O ₂)	<19% O ₂	<19% O ₂
Methane (CH ₄)	>10% LEL	>20% LEL
Carbon Dioxide (CO ₂)	>0.5% CO ₂	>1.5% CO ₂

5.6. MONITORING EQUIPMENT

The monitoring equipment used during the construction phase in this reporting period is detailed in Section 5.8 of the Construction Phase Monthly EM&A Report and the monitoring equipment used during the operation phase in the reporting period is detailed in Section 4.7 – 4.8 of the Operation Phase Monthly EM&A Report.

5.7. MONITORING RESULTS AND OBSERVATIONS

The Construction Phase landfill gas monitoring was ceased from 31 October 2024.

In this reporting period, Operation Phase landfill gas monitoring was conducted on [10 and 11 December 2024](#), [8 and 9 January 2025](#) and [13 and 14 February 2025](#) respectively. No exceedances of action level and limit level was observed.

6. SUMMARY OF EXCEEDANCE, COMPLAINT, NOTIFICATION OF SUMMONS AND PROSECUTIONS

The Environmental Complaint Handling Procedure is shown in below **Figure 6.1**:

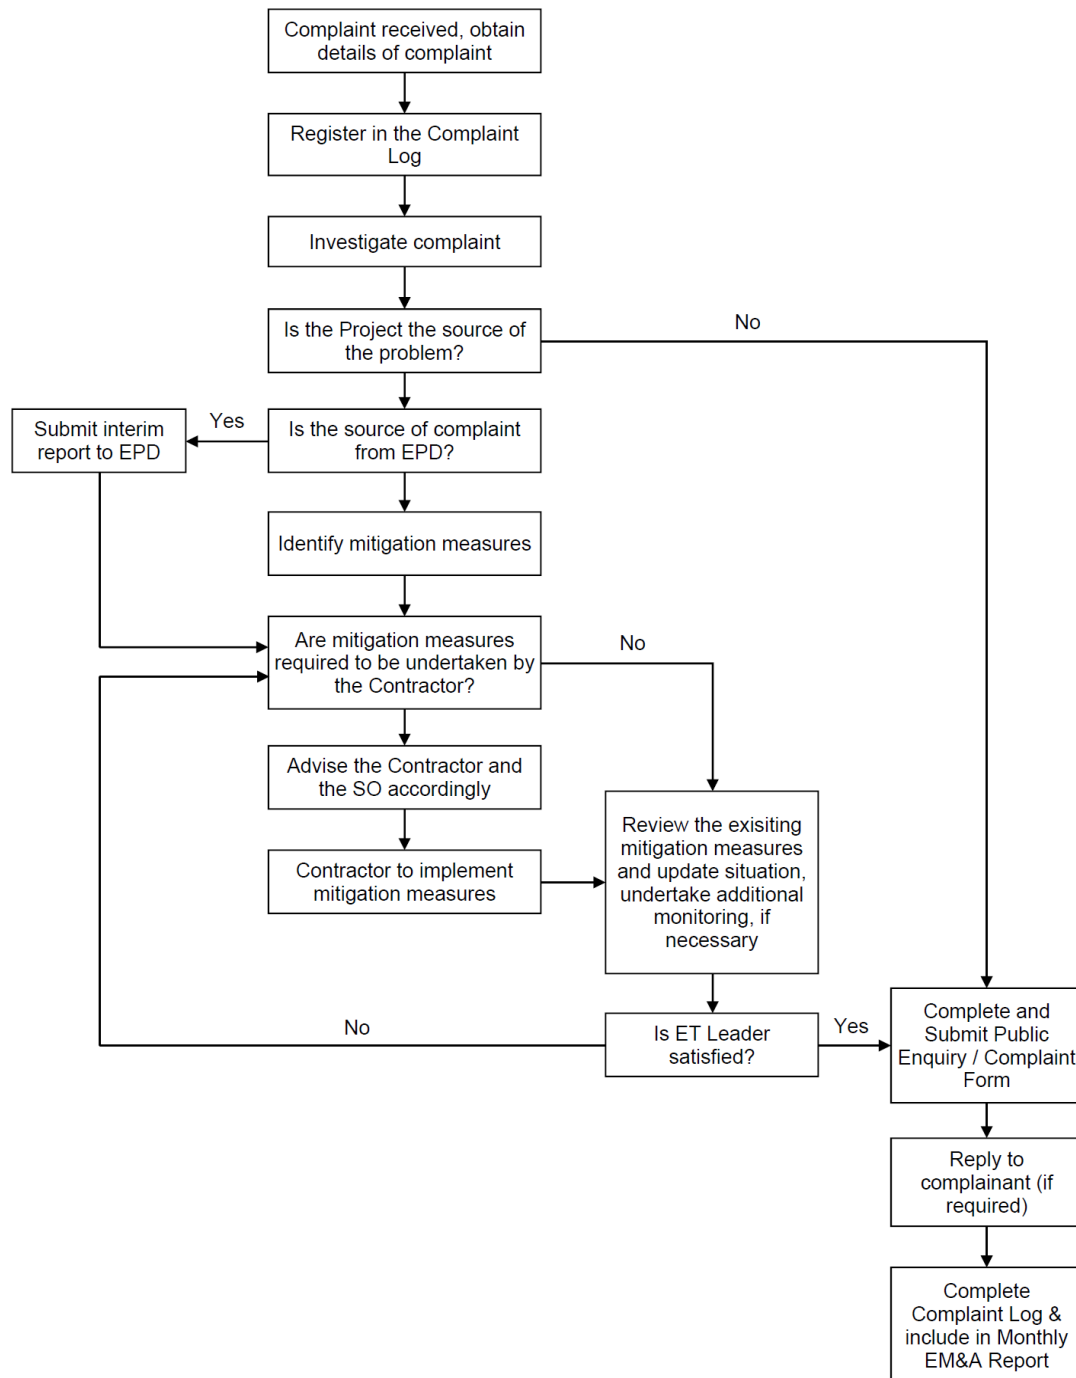


Figure 6.1 Environmental Complaint Handling Procedures

No noise monitoring was conducted during the reporting period since there are no Contract-related construction activities undertaken within a radius of 300m from the monitoring locations. No Action Level exceedance was recorded during the reporting period.

Referring to EM&A Manual, the general water quality monitoring should be carried out when there are marine-related construction activities undertaken. General water quality monitoring at the ten monitoring stations (CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36 and WSR37) was ceased from 1 September 2023 due to the completion of marine-related construction works.

Forty-one (41) of the operation phase water quality monitoring results of SS obtained had exceeded the Action Level. Sixty-eight (68) of the operation phase water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. After investigation, all exceedances were considered non-project related.

Construction Phase landfill gas monitoring was ceased from 31 October 2024.

In this reporting period, Operation Phase landfill gas monitoring was conducted on 10 and 11 December 2024, 8 and 9 January 2025 and 13 and 14 February 2025. No exceedances of action level and limit level was observed.

Operation phase monthly coral monitoring was conducted during the reporting period on 18 December 2024, 20 January 2025 and 20 February 2025 respectively. No sediment, bleaching or increased mortality in the general condition of all other tagged coral colonies were observed during the monthly operation phase monitoring period. No deterioration of the coral community was observed in the ecological monitoring results when compared with the baseline ecological monitoring results. There is no AL/LL exceedance during the monitoring period.

Operation phase fishery monitoring for wet season 2024 was carried out on 24 and 31 August 2024. The detail of the monitoring was presented in the 4th Operation Phase Monthly EM&A Report.

Continuous Monitoring of Effluent Quality was conducted sampling point from 1 December 2024 to 28 February 2025. No exceedance of the sampling was obtained during the reporting period had exceeded the Limit Level.

ET will keep closely monitoring the performance of Contractor, implementation of water quality mitigation measure and other contamination issue around the Project site, to ensure the EM&A requirement is properly implemented.

No environmental complaint was received in the reporting period. No notification of summons and prosecution was received in the reporting period.

Statistics on complaints and regulatory compliance are summarized in **Appendix G**.

7. EM&A SITE INSPECTION

Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures under the Contract.

No trespass by the Contractor outside the works area of the Project and Clear Water Bay Country Park, and no damage to the vegetation and rocky shore outside the Project area was observed in the reporting period. All plants were observed to be in satisfactory condition in the reporting period.

ET weekly site inspections were carried out by ET on [3, 10, 18, 23 and 31 December 2024](#), [7, 14, 21 and 27 January 2025](#) and [5, 11, 18 and 25 February 2025](#).

Joint site inspections were also carried out by ET and IEC on [18 December 2024](#), [21 January 2025](#) and [25 February 2025](#).

EPD conducted a site visit on [12 December 2024](#), during which no comments were raised.

According to the EIA Study Report, Environmental Permit, contract documents and EM&A Manual, the mitigation measures detailed in the documents should be implemented as much as practical during the reporting period. An updated Implementation Status of Environmental Mitigation Measures (EMIS) is provided in **Appendix C**.

8. CONCLUSIONS AND RECOMMENDATIONS

This is the 20th Quarterly EM&A Report for the Project which summarizes the key findings of the EM&A programme during the reporting period from 1 December 2024 to 28 February 2025, in accordance with the EM&A Manual and the requirement under FEP-01/503/2015/B.

According to the contractor's information, the works of TKODP were substantially completed on 30 June 2024 and the plant commenced the operation phase on 1 July 2024. The outstanding construction works were being carried out during this reporting period.

No noise monitoring was conducted in the reporting period due to the over distant monitoring station from the works location.

Referring to EM&A Manual, the general water quality monitoring should be carried out when there are marine-related construction activities undertaken. General water quality monitoring at the ten monitoring stations (CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36 and WSR37) was ceased from 1 September 2023 due to the completion of marine-related construction works.

Forty-one (41) of the operation phase water quality monitoring results of SS obtained had exceeded the Action Level. Sixty-eight (68) of the operation phase water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. After investigation, all exceedances were considered non-project related.

Continuous Monitoring of Effluent Quality was conducted sampling point 1 December 2024 to 28 February 2025. No exceedance of the sampling was obtained during the reporting period had exceeded the Limit Level.

Construction Phase landfill gas monitoring was ceased from 31 October 2024.

In this reporting period, Operation Phase landfill gas monitoring was conducted on 10 and 11 December 2024, 8 and 9 January 2025 and 13 and 14 February 2025. No exceedances of action level and limit level was observed.

Operation phase monthly coral monitoring was conducted during the reporting period on 18 December 2024, 20 January 2025 and 20 February 2025. No sediment, bleaching or increased mortality in the general condition of all other tagged coral colonies were observed during the monthly operation phase monitoring period. No deterioration of the coral community was observed in the ecological monitoring results when compared with the baseline ecological monitoring results. There is no AL/LL exceedance during the monitoring period.

Operation phase fishery monitoring for wet season 2024 was carried out on 24 and 31 August 2024. The detail of the monitoring was presented in the 4th Operation Phase Monthly EM&A Report.

Weekly environmental site inspection was conducted during the reporting period. The environmental performance of the project was therefore considered satisfactory.

[No environmental complaint was received in the reporting period.](#) No notification of summons or prosecution was received of the Contract since commencement of the Contract quarter.

The ET will keep track on the construction and operation works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Appendix A

Master Programme

[illegible]

[illegible]

[illegible]

13/WSD/17			Design, Build and Operate Stage 1 of Tesung Kwan O Desalination Plant										31 Jul 24																																															
Activity ID	Activity Name	Baseline Duration	Baseline Start	Baseline Finish	Remaining Duration	Actual / Planned Start	Actual / Planned Finish	Actual % Complete	Variance Finish Date	Total Float																																																		
											2020							2021							2022							2023							2024																					
											N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D
ES0001530	Construction of Guard House near Pier	147	29-May-21	22-Oct-21	0	10-Jun-23 A	10-Oct-23 A	100%	-718																																																			
ES0001540	Architectural Finishes for Guard House near Pier	74	23-Oct-21	04-Jan-22	0	05-Oct-23 A	23-Mar-24 A	100%	-809																																																			
CO2 Tanks Areas																																																												
ES0001370	Filling to Formation for CO2 Tanks Area	29	22-Jun-21	20-Jul-21	0	14-Dec-21 A	17-Dec-21 A	100%	-150																																																			
ES0001380	Construction of CO2 Tanks Area	116	21-Jul-21	13-Nov-21	0	21-Dec-21 A	10-Mar-22 A	100%	-117																																																			
ES0002170	M&E Installation of CO2 Tanks Area	84	27-Jan-22	20-Apr-22	0	11-Mar-22 A	03-Oct-23 A	100%	-531																																																			
Diesel Emergency Generator																																																												
ES0002250	M&E Diesel Emergency Generator	57	25-Feb-22	22-Apr-22	0	18-Jan-23 A	28-Jul-23 A	100%	-462																																																			
Switch Room and Transformer Installation																																																												
ES0002300	M&E Installation of HV/LV Switchroom and Transformer (Admin)	242	16-Nov-21	15-Jul-22	0	27-Jul-22 A	20-Apr-23 A	100%	-279																																																			
Miscellaneous																																																												
ES0001630	Remaining Architectural Finishes for All Buildings	322	11-Jan-22	28-Nov-22	0	09-Dec-22 A	29-Jun-24 A	100%	-579																																																			
ES0001640	External Process and Non Process Pipe	655	18-Dec-20	03-Oct-22	0	27-May-21 A	23-Nov-23 A	100%	-416																																																			
ES0001650	Drainage and Cable Duct	518	04-Jun-21	03-Nov-22	0	25-Apr-22 A	18-Jul-23 A	100%	-257																																																			
ES0001660	Slope Mitigation Works	684	23-Nov-20	07-Oct-22	76	28-Sep-21 A	15-Oct-24	50%	-739	-258	Slope																																																	
ES0001670	Landscaping Works	469	28-Oct-21	08-Feb-23	0	01-Mar-23 A	18-May-24 A	100%	-465																																																			
ES0002290	M&E PV Panels	215	23-Nov-21	25-Jun-22	0	05-Jan-23 A	29-Jul-24 A	100%	-764																																																			
ES0002310	M&E Chiller & Irrigation System Installation	298	27-Oct-21	20-Aug-22	0	25-Aug-23 A	30-May-24 A	100%	-648																																																			
ES0002350	M&E Installation of Surge Vessel	70	24-Feb-22	04-May-22	0	15-Sep-23 A	30-Oct-23 A	100%	-544																																																			
ES0002390	M&E Installation of Thickened Sludge Holding Tank	42	09-Dec-21	19-Jan-22	0	27-Mar-23 A	31-Jan-24 A	100%	-742																																																			
Statutory Submission & Inspection																																																												
ES0002330	Statutory Submission & Inspection	1148	11-Jan-20	03-Mar-23	2	03-Dec-19 A	02-Aug-24	100%	-518	-184	Statutory Sub																																																	
Testing and Commissioning																																																												
ES0002400	M&E Precommissioning	229	12-Jun-22	26-Jan-23	0	22-Apr-23 A	29-Mar-24 A	100%	-428																																																			
ES0002410	M&E Commissioning	213	04-Jul-22	01-Feb-23	0	02-Jun-23 A	30-Jul-24 A	100%	-544																																																			
ES0002420	M&E Performance Test	40	02-Feb-23	13-Mar-23	0	28-Nov-23 A	26-Apr-24 A	100%	-409																																																			
Procurement of Major Plant & Equipment Schedule																																																												
Pipes, Fittings and Valves																																																												
Pressure Relief Valves																																																												
P-PV-A51IK-0	NR Receipt - Pressure relief valves	0		08-Sep-21	0		02-Oct-20 A	100%	341		◆ NR Receipt - Pressure relief valves																																																	
P-PV-A51IK-0	Receipt of offers - Pressure relief valves	30	09-Sep-21	08-Oct-21	0	03-Oct-20 A	27-Oct-20 A	100%	346		▬ Receipt of offers - Pressure relief valves																																																	
P-PV-A51IK-0	Technical Validation - Pressure relief valves	30	09-Oct-21	07-Nov-21	0	28-Oct-20 A	05-Mar-21 A	100%	248		▬ Technical Validation - Pressure relief valves																																																	
P-PV-A51IK-0	Negotiation and Award / Client Approval - Pressure relief valves	60	08-Nov-21	06-Jan-22	0	06-Mar-21 A	19-Nov-21 A	100%	49		▬ Negotiation and Award / Client Approval - Pressure relief valves																																																	
P-PV-A51IK-0	Manufacture and FAT - Pressure relief valves	187	07-Jan-22	12-Jul-22	0	20-Nov-21 A	22-Jul-22 A	100%	-9		▬ Manufacture and FAT - Pressure relief valves																																																	
P-PV-A51IK-0	Transport & Customs - Pressure relief valves	50	13-Jul-22	31-Aug-22	0	23-Jul-22 A	31-Jul-22 A	100%	32		▬ Transport & Customs - Pressure relief valves																																																	
P-PV-A51IK-0	1st delivery date to site - Pressure relief valves	0		31-Aug-22	0		31-Jul-22 A	100%	32		◆ 1st delivery date to site - Pressure relief valves																																																	
Instrumentation, Control & Automation																																																												
Bypass Level Indicators																																																												
P-IC-A08FK2-	NR Receipt - Bypass Level Indicators	0		12-Apr-21	0		16-Sep-20 A	100%	208		◆ NR Receipt - Bypass Level Indicators																																																	
P-IC-A08FK2-	Receipt of offers - Bypass Level Indicators	30	13-Apr-21	12-May-21	0	17-Sep-20 A	20-Oct-20 A	100%	205		▬ Receipt of offers - Bypass Level Indicators																																																	
P-IC-A08FK2-	Technical Validation - Bypass Level Indicators	30	13-May-21	11-Jun-21	0	21-Oct-20 A	25-Nov-20 A	100%	199		▬ Technical Validation - Bypass Level Indicators																																																	
P-IC-A08FK2-	Negotiation and Award / Client Approval - Bypass Level Indicators	60	12-Jun-21	10-Aug-21	0	26-Nov-20 A	30-Jun-21 A	100%	42		▬ Negotiation and Award / Client Approval - Bypass Level Indicators																																																	
P-IC-A08FK2-	Manufacture and FAT - Bypass Level Indicators	90	11-Aug-21	08-Nov-21	0	01-Jul-21 A	22-Jul-22 A	100%	-255		▬ Manufacture and FAT - Bypass Level Indicators																																																	
P-IC-A08FK2-	Transport & Customs - Bypass Level Indicators	50	09-Nov-21	28-Dec-21	0	18-Sep-22 A	26-Oct-22 A	100%	-301		▬ Transport & Customs - Bypass Level Indicators																																																	

Summary Bar

Actual Work

Actual Level of Effort

Target Bar

Early Bar

Milestone

Target Milestone

Appendix D - Critical Path

file: MPR202407_c

acciona

JEC


ACC

AJC JOINT VENTURE

[illegible]

Appendix B

Overview of Desalination Plant in Tseung Kwan O

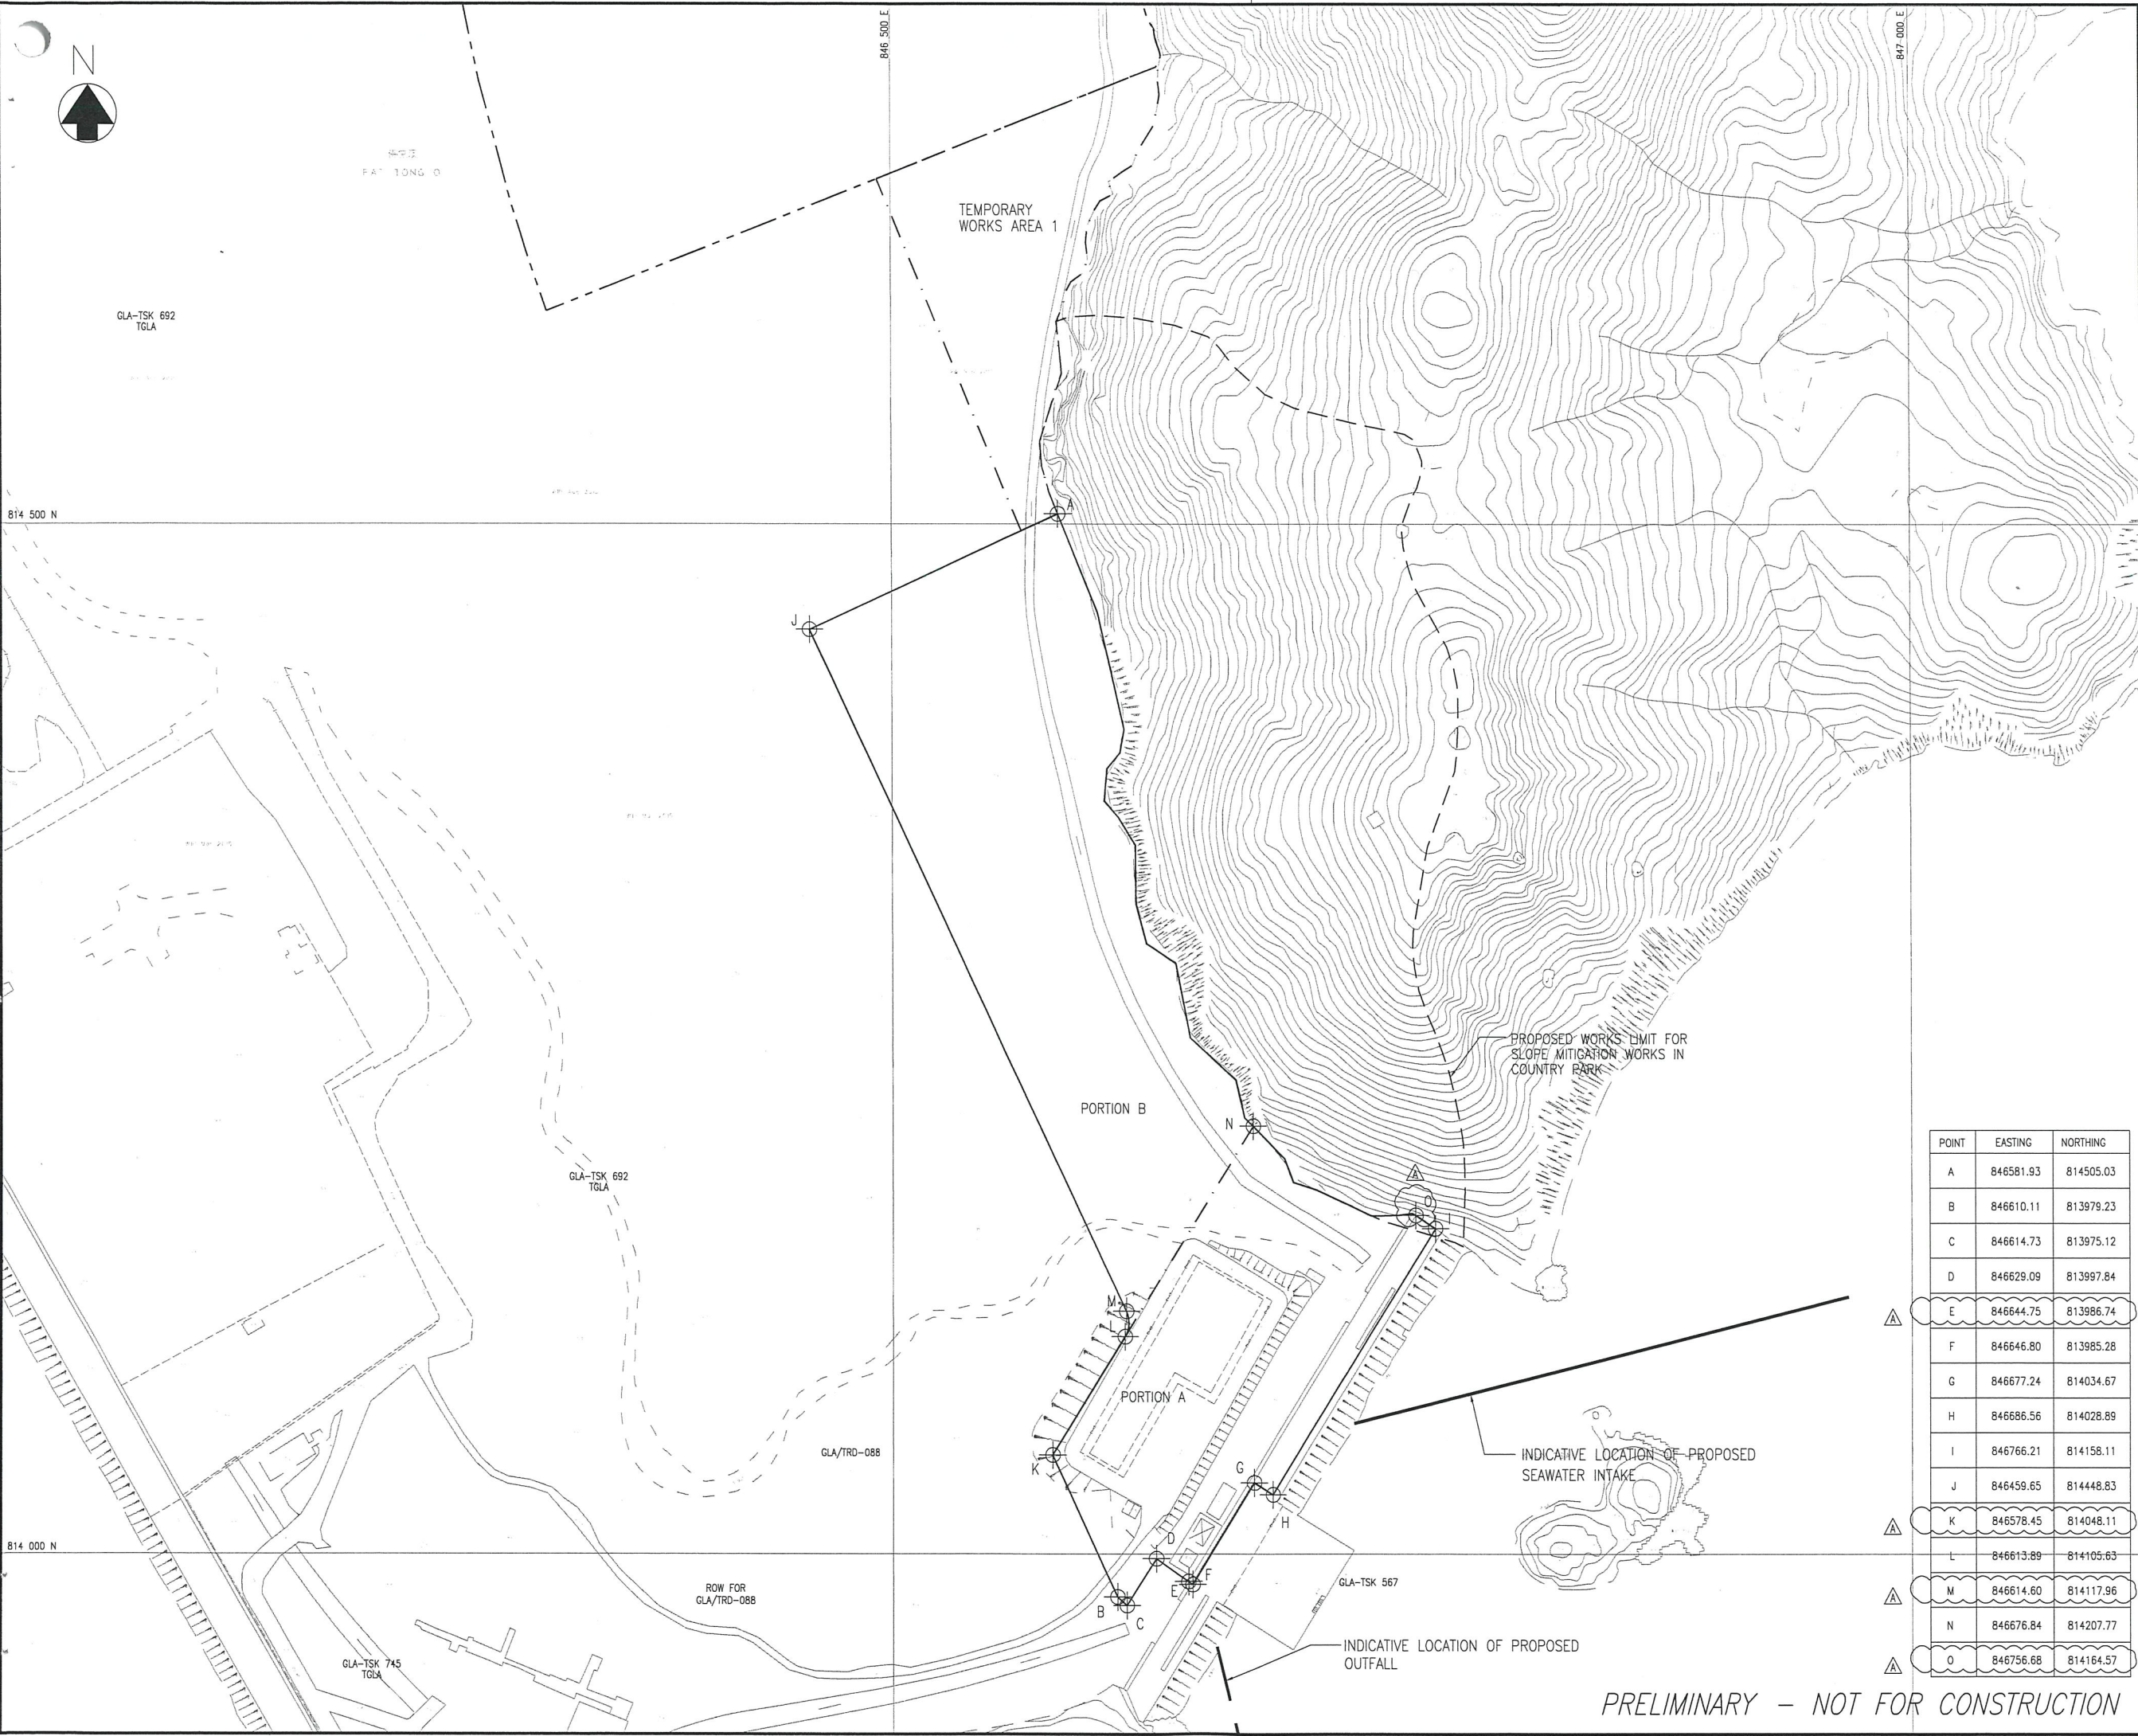

© Copyright by Black & Veatch Hong Kong Limited

LEGEND:

- BOUNDARY OF SENT LANDFILL EXTENSION
- BOUNDARY OF WORKS AREA FOR TKO DESALINATION PLANT
- - - SITE PHASING
- ALLOCATED LAND BOUNDARIES

NOTE: TEMPORARY WORKS AREA 1 WILL BE HANDED OVER AT +6 MPD WITH A TOLERANCE OF ±500mm.

B	10/03	UPDATE NOTES			YLC
A	07/18	UPDATE COORDINATES			YLC
Revision	Date	Description			Initial
	Designed	Checked	Drawn	Checked	
Initial	YLC	CKH	SZ	WLS	
Date	02/18	02/18	02/18	02/18	

Approved

Christina Go

Agreement No. CE 8/2015 (WS)

Contract No. 13/WSD/17

Contract Title
DESIGN, BUILD AND OPERATE
FIRST STAGE OF TSEUNG KWAN O
DESALINATION PLANT

Drawing Title
SITE HANDOVER WORKS AREAS

Drawing No.	Revision
190495/K/TEND/10/0003	B

Scale
A1 1 : 1500
A3 1 : 3000

水務署
Water Supplies
Department

BLACK & VEATCH HONG KONG LIMITED
博威工程顧問有限公司

POINT	EASTING	NORTHING
A	846581.93	814505.03
B	846610.11	813979.23
C	846614.73	813975.12
D	846629.09	813997.84
E	846644.75	813986.74
F	846646.80	813985.28
G	846677.24	814034.67
H	846686.56	814028.89
I	846766.21	814158.11
J	846459.65	814448.83
K	846578.45	814048.11
L	846613.89	814105.63
M	846614.60	814117.96
N	846676.84	814207.77
O	846756.68	814164.57

PRELIMINARY – NOT FOR CONSTRUCTION

BUILDINGS IN FIRST STAGE

CODE	NAME OF BUILDING	TOTAL G.F.A. (m²)	SITE COVERAGE (m²)
B	COMBINE SHAFT	759,876	759,876
C	ACT/DIAFF	10027,547	5455,346
G	REVERSE OSMOSIS BUILDING AND ELECTRICAL BUILDING	4511,455	5367,935
H	CO2 TANKS AREA	-	-
J	PRODUCT WATER STORAGE TANK, PUMP STATION AND ELECTRICAL BUILDING	1974,610	2933,980
K	SUDGE TREATMENT BUILDING, TANK AND PUMP ROOM	2531,044	1228,361
M	ADMINISTRATION BUILDING & ELECTRICAL BUILDING C	2450,713	1114,062
N	MAIN ELECTRICAL AND CENTRAL CHILLER PLANT BUILDING	-	409,893
R1	ELECTROCHLORINATION BUILDING & ELECTRICAL BUILDING A	657,992	825,776
S	132 KV SUBSTATION	-	943,590
T	IRRIGATION WATER TANK AND PUMP ROOM	-	156,148
R2	CHEMICAL BUILDING	813,056	613,056
V	VISITOR GALLERY	1330,410	1330,410
X1	GUARD HOUSE AND FS CONTROL ROOM	39,585	39,585
X2	GUARD HOUSE	22,035	22,035
Y	R + D OUTDOOR	-	-
Z	WASTE WATER TREATMENT PLANT	48,000	48,000
TOTAL =		25175,323	21490,023

LEGEND / ABBREVIATION


H/L WINDOW	HIGH LEVEL WINDOW
M.L.	METAL LOUVRES
C.L.	CAT LADDER
A.U.T.	ACCESSIBLE UNISEX TOILET
⊕	PROPOSED FINISH FLOOR LEVEL IN METER ABOVE P.D.
⊕	STRUCTURAL FLOOR LEVEL IN METER ABOVE P.D.
M.V.I.A.L.	MECHANICAL VENTILATION & ARTIFICIAL LIGHTING
F.E.	4.5kg CO ₂ FIRE EXTINGUISHER
H.R.	HOSE REEL
Ⓐ	FIREMAN'S LIFT
Ⓢ	LIFT FOR THE BARRIER FREE ACCESS
P.D.	PIPE DUCT

PLOT RATIO & SITE COVERAGE CALCULATION:

SITE AREA OF THE FIRST STAGE	=	56108 m²
TOTAL G.F.A.	=	25092.141 m²
TOTAL SITE COVERAGE	=	21414.841 m²
PLOT RATIO	=	25092.141 / 56108
	=	0.447 < PERMITTED
SITE COVERAGE	=	21414.841 / 56108 x 100
	=	38.167%


SITE LOCATION PLAN

1 : 5000

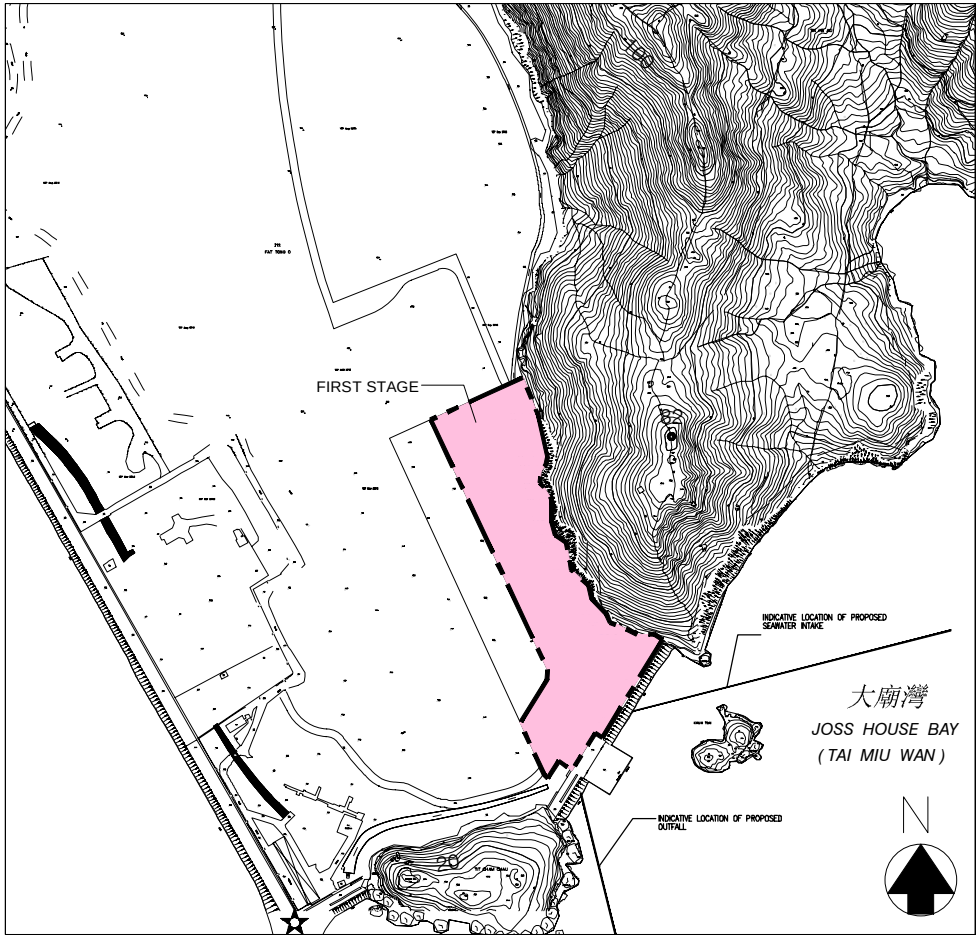

FIRST STAGE OF TSEUNG KWAN O DESALINATION PLANT

1 : 1000

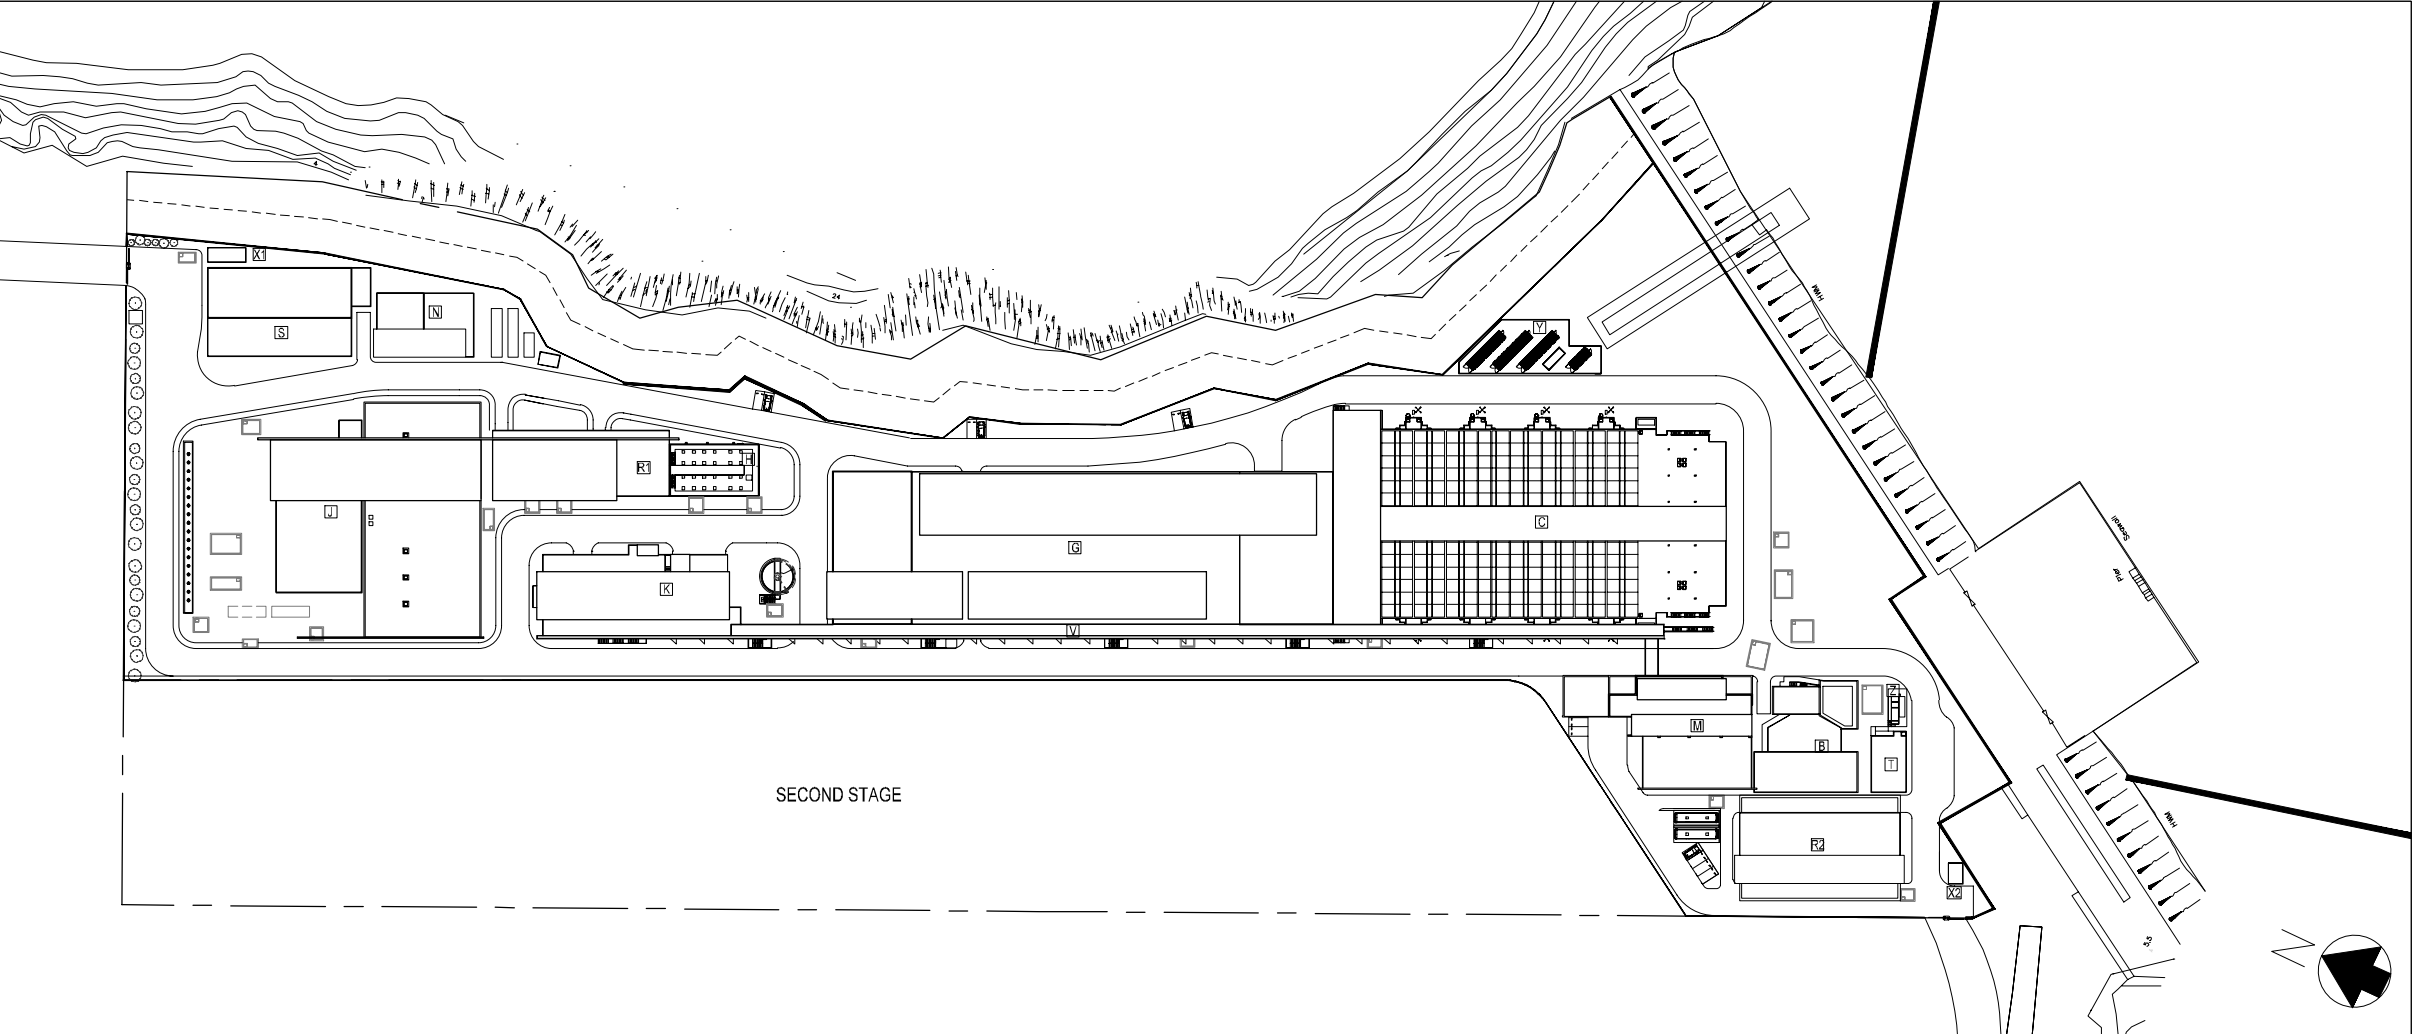

0	TENDER SUBMISSION	CAD	JAN 19
Rev	Description	By	Date
Employer			
			
Employer's Consultant			
			
Tenderer			
			
Designer			
			
Project title			
CONTRACT NO. 13/WSD/17			
DESIGN, BUILD AND OPERATE FIRST STAGE OF TSEUNG KWAN O DESALINATION PLANT			
Drawing title			
ARCHITECTURAL – PLOT RATIO AND SITE COVERAGE CALCULATION, LEGEND ABBREVIATION			
Drawing no.			Rev.
TKO/AJC/W/A000/AR/001			0
Drawn	Date	Checked	Approved
OKAL	JAN 19	S.C.	T.C.
Scale	N.T.S.	Status	—

©COPYRIGHT RESERVED

Appendix C

Summary of Implementation Status of Environmental Mitigation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
Air Quality								
S4.8.1	Impervious dust screen or sheeting will be provided to enclose scaffolding from the ground floor level of building for construction of superstructure of the new buildings.	Land site/ During Construction	Contractor(s)		✓		Implemented	Air Pollution Control (Construction Dust)
S4.8.1	Impervious sheet will be provided for skip hoist for material transport.	Land site/ During Construction	Contractor(s)		✓		NA	-
S4.8.1	The area where dusty work takes place should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after dusty activities as far as practicable.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	All dusty materials should be sprayed with water or a dust suppression chemical immediately prior to any loading, unloading or transfer operation.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	Dropping heights for excavated materials should be controlled to a practical height to minimize the fugitive dust arising from unloading.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	During transportation by truck, materials should not be loaded to a level higher than the side and tail boards and should be dampened or covered before transport.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	Wheel washing device should be provided at the exits of the work sites. Immediately before leaving a construction site, every vehicle shall be washed to remove any dusty material from its body and wheels as far as practicable.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	Road sections between vehicle-wash areas and vehicular entrance will be paved.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	Hoarding of not less than 2.4m high from ground level will be provided along the length of the Project Site boundary.	Land site/ During construction	Contractor(s)	✓	✓		N/A	-
S4.8.1	Haul roads will be kept clear of dusty materials and will be sprayed with water so as to maintain the entire road surface wet at all times.	Land site/ During construction	Contractor(s)		✓		Implemented after reminder	-
S4.8.1	Temporary stockpiles of dusty materials will be either covered entirely by impervious sheets or sprayed with water to maintain the entire surface wet all the time.	Land site/ During construction	Contractor(s)		✓		Implemented after reminder	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S4.8.1	Stockpiles of more than 20 bags of cement, dry pulverized fuel ash and dusty construction materials will be covered entirely by impervious sheeting sheltered on top and 3-sides.	Land site/ During construction	Contractor(s)		✓		N/A	-
S4.8.1	All exposed areas will be kept wet always to minimize dust emission.	Land site/ During construction	Contractor(s)		✓		Implemented after reminder	-
S4.8.1	Ultra-low-Sulphur diesel (ULSD) will be used for all construction plant on-site, as defined as diesel fuel containing not more than 0.005% Sulphur by weight) as stipulated in Environment, Transport and Works Bureau Technical Circular (ETWB-TC(W)) No 19/2005 on Environmental Management on Construction Sites.	Land site/ During construction/ During Operation	Contractor(s)		✓	✓	Implemented	Environment, Transport and Works Bureau Technical Circular (ETWB-TC(W)) No 19/2005 on Environmental Management on Construction Sites
S4.8.1	The engine of the construction equipment during idling will be switched off.	Land site/ During construction	Contractor(s)		✓		Implemented	-
S4.8.1	Concrete batching plant will be required on site. control measures recommended in the Guidance Note on a Best Practicable Means for Cement Works (Concrete Batching Plant) (BPM 3/2 (93)) will be implemented. The control measures recommended in the Guidance Note on a Best Practicable Means for Cement Works (Concrete Batching Plant) (BPM 3/2 (93)) will be implemented.	Land site/ During construction	Contractor(s)		✓		N/A	-
S4.8.1	Regular maintenance of construction equipment deployed on-site will be conducted to prevent black smoke emission.	Land site/ During construction	Contractor(s)		✓		Implemented	-
S4.10	To ensure proper implementation of the recommended dust mitigation measures and good construction site practices during the construction phase, environmental site audits on weekly basis is recommended throughout the construction period.	Land site/ During construction	Contractor(s)/ Environmental Team (ET) & Independent Environmental Checker (IEC)		✓		Implemented	-
Noise								
S5.7	Only well-maintained plant will be operated on-site, and plant will be serviced regularly during the construction phase.	All area/ During construction	Contractor(s)		✓		Implemented	A Practical Guide for the Reduction of Noise from Construction Works A Practical Guide for the Reduction of Noise from Construction Works

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S5.7	Silencers or mufflers on construction equipment will be utilized and will be properly maintained during the construction phase.	Noise control/ During construction	Contractor(s)		✓		N/A	-
S5.7	Mobile plant, if any, will be sited as far away from NSRs as possible.	Noise control/ During construction	Contractor(s)		✓		N/A	-
S5.7	Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or will be throttled down to a minimum.	Noise control/ During construction	Contractor(s)		✓		Implemented	-
S5.7	Plants known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.	Noise control/ During construction	Contractor(s)		✓		N/A	-
S5.7	Material stockpiles and other structures will be effectively utilized, wherever practicable, in screening noise from on-site construction activities.	Noise control/ During construction	Contractor(s)		✓		N/A	-
S5.7	Use of Quiet Powered Mechanical Equipment (QPME).	Noise control/ During construction	Contractor(s)		✓		Implemented	-
S5.7	Movable noise barriers of 3m in height with skid footing should be used and located within a few meters of stationary plant and mobile plant such that the line of sight to the NSR is blocked by the barriers. The length of the barrier should be at least five times greater than its height. The noise barrier material should have a superficial surface density of at least 7 kg m-2 and have no or gappeningss.	Noise control/ During construction	Contractor(s)		✓		N/A	-
S5.7	The noise insulating sheet should be deployed such that there would be no opening or gaps on the joints.	Noise control/ During construction	Contractor(s)		✓		N/A	-
S5.7	Construction activities (e.g., excavation/shoring, reinstatement (asphalt), and pipe jacking) will be planned and carried out in sequence, such that items of PME proposed for these activities will not be operated simultaneously.	Noise control/ During construction	Contractor(s)	✓	✓		Implemented	-
S5.7	PMEs will not be used at the works areas near educational institutions with residual impact (i.e., the "influence area" within a radius of 40m) during school hours in order to reduce impact to the educational institutions.	Noise control / During construction	Contractor(s)		✓		N/A	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S5.7	Noise enclosures or acoustic sheds would be used to cover stationary PME such as generators. Portable/Movable noise enclosure made of material with superficial surface density of at least 7 kg m ⁻² may be used for screening the noise from operation of the saw/groover, concrete.	Noise control/ Pre-construction/ During construction	Contractor(s)	✓	✓		N/A	-
5.9	Sawcutting pavement, breaking up of pavement, excavation /shoring, pipe laying, backfilling, reinstatement (concrete) and pipe jacking shall be scheduled outside the examination period.	Noise control/ Pre-construction/ During construction	Contractor(s)	✓	✓		N/A	-
S5.9	In view the duration of noise exceedance at Creative Secondary School, PLK Laws Foundation College, TKO Kei Tak Primary School and School of Continuing and Professional Studies-CUHK is limited to 8 weeks, the construction work in the influence areas near the four schools shall be scheduled during long school holidays (eg summer holiday, Easter holiday or Christmas holiday, etc) as far as practicable. Scheduling the construction work for the four schools.	Noise control/ Pre-construction/ During construction	Contractor(s)	✓	✓		N/A	-
S5.10	A noise monitoring programme shall be implemented for the construction phase.	Designated monitoring stations as defined in EM&A Manual/During construction phase	Environmental Team		✓		N/A	-
S5.10	The effectiveness of on-site control measures could also be evaluated through the regular site audits.	All facilities/ During construction	Contractor(s)/ ET & IEC		✓		Implemented	-
Water Quality								
S6.9	Dredged marine sediment will be disposed of in a gazette marine disposal area in accordance with marine dumping permit conditions of the Dumping at Sea Ordinance (DASO).	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	Dumping at Sea Ordinance (DASO)
S6.9	Disposal vessels will be fitted with tight bottom seals in order to prevent leakage of material during transport.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	Barges will be filled to a level, which ensures that material does not spill over during transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	After dredging, any excess materials will be cleaned from decks and exposed fittings before the vessel is moved from the dredging area.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S6.9	All vessels should be well maintained and inspected before use to limit any potential discharges to the marine environment.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	All vessels must have a clean ballast system.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	No discharge of sewage/grey wastewater should be allowed. Wastewater from potentially contaminated area on working vessels should be minimized and collected. These kinds of wastewater should be brought back to port and discharged at appropriate collection and treatment system.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	
S6.9	No soil waste is allowed to be disposed overboard.	Marine Dredging/ During construction	Contractor(s)		✓		N/A	
S6.9	Silt removal facilities such as silt traps or sedimentation facilities will be provided to remove silt particles from runoff to meet the requirements of the TM standard under the WPCO. The design of silt removal facilities will be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected on a regular basis and maintained to confirm proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit will be removed regularly.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	ProPECC PN 1/94 TM Standard under the WPCO
S6.9	Earthworks to form the final surfaces will be followed up with surface protection and drainage works to prevent erosion caused by rainstorms.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9	Appropriate surface drainage will be designed and provided where necessary.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9	The precautions to be taken at any time of year when rainstorms are likely together with the actions to be taken when a rainstorm is imminent or forecasted and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94.	Land site & drainage/ During construction	Contractor(s)	✓	✓		Implemented	ProPECC PN 1/94
S6.9	Oil interceptors will be provided in the drainage system where necessary and regularly emptied to prevent the release of oil and grease into the storm water drainage system after accidental spillages.	Land site & drainage/ During construction	Contractor(s)		✓		N/A	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S6.9	Temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge, if any, will be adequately designed for the controlled release of storm flows.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9	The temporary diverted drainage, if any, will be reinstated to the original condition when the construction work has finished or when the temporary diversion is no longer required.	Land site & drainage/ During construction	Contractor(s)		✓		N/A	-
S6.9	Appropriate numbers of portable toilets shall be provided by a licensed contractor to serve the construction workers over the construction site to prevent direct disposal of sewage into the water environment.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9 and S6.12	The sterilization water should be dechlorinated with total residual chlorine (TRC) level below 1 mg/L before discharge to public sewer. In situ testing of TRC should also be conducted for the discharge of chlorinated water for pipeline disinfection to ensure sufficient dechlorination before discharge to public sewer.	Sterilization of water mains prior to commissioning	Contractor(s)		✓	✓	N/A	Technical Memorandum for Effluents Discharged into Drainage and Sewerage Systems Inland and Coastal Waters
S6.9	The cleaning and flushing water should also be treated and desilted to the relevant discharge requirement stipulated in TM-DSS before discharging.	Sterilization of water mains prior to commissioning	Contractor(s)		✓	✓	Implemented	
S6.9	Site drainage should be well maintained, and good construction practices should be observed to ensure that oil, fuels, solvents and other chemicals are managed, stored and handled properly and do not enter the nearby water streams.	Land site & drainage/ During construction/ During operation	Contractor(s)		✓	✓	Implemented after reminder	-
S6.12	Regular site inspections will be carried out in order to confirm that regulatory requirements are being met and that contractors are implementing the standard site practice and mitigation measures as proposed to reduce potential impacts to water quality.	During construction	Contractor(s)/ ET & IEC		✓		Implemented	-
Waste Management								
S8.5	Nomination of approved personnel to be responsible for standard site practices, arrangements for collection and effective disposal to an appropriate facility of all wastes generated at the site.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	Training of site personnel in proper waste management and chemical handling procedures. Training will be provided to workers on the concepts of site cleanliness and appropriate waste management procedures, including waste reduction, reuse and recycling at the beginning of the construction works.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Provision of sufficient waste disposal points and regular collection for disposal.	All area/ During construction/ During operation	Contractor(s)		✓	✓	Implemented	DEVB TC(W) No. 8/2010, Enhanced Specification for Site Cleanliness and Tidiness.
S8.5	Appropriate measures to reduce windblown litter and dust transportation of waste by either covering trucks or by transporting wastes in enclosed containers.	All area/ During construction	Contractor(s)		✓		Implemented	
S8.5	A waste management plan (WMP) as stated in the "ETWB TC(W) No. 19/2005, Environmental Management on Construction Sites" for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established and implemented during the construction phase as part of the Environmental Management Plan (EMP). The Contractor will be required to prepare the EMP and submits it to the Architect/ Engineer under the Contract for approval prior to implementation.	All area/ During construction	Contractor(s)		✓		Implemented	ETWB TC(W) No. 19/2005, Environmental Management on Construction Sites
S8.5	Separation of chemical wastes for special handling and appropriate treatment at the Chemical Waste Treatment Centre at Tsing Yi.	All area/ During construction	Contractor(s)		✓		Implemented	Chapters 2 & 3 Code of Practice on the Packaging, Labelling & Storage of Chemical Wastes published under the Waste Disposal Ordinance (Cap 354),
S8.5	Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors.	Land site/ During construction	Contractor(s)		✓		Implemented	Waste Disposal Ordinance (Cap 354)
S8.5	A recording system for the amount of waste generated/ recycled and disposal sites. The trip- ticket system will be included as one of the contractual requirements and implemented by the contractor(s).	Land site/ During construction	Contractor(s)		✓		Implemented	DEVB TC(W) No. 6/2010, Trip Ticket System for Disposal of Construction &
S8.5	Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of material and their proper disposal.	Land site/ During construction/ During operation	Contractor(s)		✓		Implemented	WBTC 32/92, The Use of Tropical Hard Wood on Construction Site

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	Encourage collection of aluminium cans and wastepaper by individual collectors during construction with separate labelled bins provided to segregate these wastes from other general refuse by the workforce.	Land site/ During construction	Contractor(s)		✓		Implemented	ETWB TCW No. 33/2002, Management of Construction and
S8.5	Any unused chemicals and those with remaining functional capacity will be recycled as far as possible.	Land site/ During construction	Contractor(s)		✓		N/A	-
S8.5	Use of reusable non-timber formwork to reduce the amount of C&D materials.	All areas/ During construction	Contractor(s)		✓		Implemented	WBTC 32/92, The Use of Tropical Hard Wood on Construction Site
S8.5	Prior to disposal of construction waste, wood, steel and other metals will be separated to the extent practical, for re-use and/or recycling to reduce the quantity of waste to be disposed of to landfill.	All areas/ During construction	Contractor(s)		✓		Implemented	DEVB TC(W) No. 6/2010, Trip Ticket System for Disposal of Construction & Demolition Materials
S8.5	Proper storage and site practices to reduce the potential for damage or contamination of construction materials.	All areas/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Plan and stock construction materials carefully to reduce amount of waste generated and avoid unnecessary generation of waste.	All areas/ During construction	Contractor(s)		✓		Implemented	-
S8.5	A Sediment Quality Report (SQR) for sampling and chemical testing of the sediment will be prepared and submitted to the EPD for approval. The approved detailed sampling and chemical testing will be carried out prior to the commencement of the dredging activities to confirm the sediment disposal method.	Marine works/ During construction	Contractor(s)		✓		N/A	ETWB TC(W) No. 34/2002 and Dumping at Sea Ordinance (DASO)
S8.5	The management of dredged/ excavated sediment management requirement from ETWB TC(W) No. 34/2002 will be incorporated in the Specification of the Contract Documents.	Marine works/ During construction	WSD/ Contractor(s)		✓		Implemented	ETWB TC(W) No. 34/2002 and Dumping at Sea Ordinance (DASO)
S8.5	The contractor will open a billing account with EPD in accordance with the Waste Disposal (Charges for Disposal of Construction Waste) Regulation for the payment of disposal charges.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	Cap 354N Waste Disposal (Charges for Disposal of Construction Waste) Regulation
S8.5	A trip-ticket system will be established in accordance with DEVB TC(W) No. 6/2010 to monitor the reuse of surplus excavated materials off-site and disposal of construction waste and general refuse at transfer facilities/ landfills, and to control fly-tipping.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	DEVB TC(W) No. 6/2010, Trip Ticket System for Disposal of Construction & Demolition Materials

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	The project proponent will also conduct regular inspection of the waste management measures implemented on site as described in the Waste Management Plan.	All area/ During construction	Contractor(s)/ Environmental Team (ET) & Independent Environmental Checker (IEC)		✓		Implemented	ETWB TC(W) No. 19/2005, Environmental Management on Construction Sites
S8.5	A recording system (similar to summary table as shown in Annex 5 and Annex 6 of Appendix G of ETWB TC(W) No. 19/2005) for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established during the construction phase.	All area/ During construction	Contractor(s)		✓		Implemented	Annex 5 and Annex 6 of Appendix G of ETWB TC(W) No. 19/2005
S8.5	Inert C&D materials (public fill) will be reused within the Project as far as practicable.	All area/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Public fill and construction waste shall be segregated and stored in different containers or skips to facilitate reuse or recycling of materials and their proper disposal.	All area/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.	All area/ During construction	Contractor(s)		✓		Implemented	-
S8.5	To reduce the potential dust and water quality impacts of site formation works, C&D materials will be wetted as quickly as possible to the extent practice after filling.	All area/ During construction	Contractor(s)		✓		Implemented	Air Pollution Control (Construction Dust) Regulation (Cap 311R); WPCO (Cap 358)
S8.5	Open stockpiles of excavated/ fill materials or construction wastes on-site should be covered with tarpaulin or similar fabric.	Land site/ During Construction, particularly dry season	Contractor(s)		✓		Implemented	Air Pollution Control (Construction Dust) Regulation (Cap 311R)
S8.5	Chemical waste container shall be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	Waste Disposal (Chemical Waste) (General) Regulation; Code of Practice on the Packaging, Handling and Storage of Chemical Wastes
S8.5	Chemical waste container shall have a capacity of less than 450 L unless the specifications have been approved by the EPD.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	A label in English and Chinese shall be displayed on the chemical container in accordance with instructions prescribed in Schedule 2 of the Regulations.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	Storage areas for chemical waste shall be enclosed on at least 3 sides.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall have adequate ventilation.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall be covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary).	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall be arranged so that incompatible materials are appropriately separated.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	General refuse will be stored in enclosed bins or compaction units separately from construction and chemical wastes.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented after reminder	
S8.5	Adequate number of waste containers will be provided to avoid over-spillage of waste.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	DEVB TC(W) No.8/2010 Enhanced Specification for Site Cleanliness and Tidiness.
S8.5	A reputable waste collector will be employed by the Contractor to remove general refuse from the site, separately from construction and chemical wastes, on a daily basis to minimise odour, pest and litter impacts.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented after reminder	-
S8.5	Recycling bins will be provided at strategic locations within the Site to facilitate recovery of recyclable materials (including aluminum can, waste paper, glass bottles and plastic bottles) from the Site. Materials recovered will be sold for recycling.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	-
S8.5	To avoid any odour and litter impact, accurate number of portable toilets will be provided for workers on-site.	All area/ During construction	Contractor(s)		✓		Implemented	-
S8.5	The burning of refuse on construction sites is prohibited by law.	All area/ During construction	Contractor(s)		✓		Implemented	Air Pollution Control Ordinance (Cap 311)

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S8.7	To facilitate monitoring and control over the contractors' performance on waste management, a waste inspection and audit programme will be implemented throughout the construction phase.	All facilities/ During construction	ET/ IEC		✓		Implemented	-
Ecology								
S9.7	For slope mitigation works within the Clear Water Bay Country Park, to avoid tree felling and damages to trees, the exact locations of the flexible barrier foundation plates, soil nails and rock dowels can be adjusted during detailed design, and a setback distance from existing trees is recommended to be maintained as far as practical. A detailed specification describing the exact locations of the flexible barrier foundation plates, soil nails and rock dowels will be prepared to illustrate how the setback distance from existing trees would be implemented for tree avoidance.	Slope mitigation works area/ During detailed design/ During construction	Contractor(s)	✓	✓		Implemented	-
S9.7	Pruning of tree canopies along the alignment of the flexible barriers shall be limited to a minimum.	Slope mitigation works area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	The alignment of flexible barriers shall be optimized to preserve all species of conservation interest and minimize the impact to the existing vegetation as far as practicable. All individuals of Marsdenia lachnostoma within the slope mitigation areas shall be retained in-situ, by positioning the alignment of flexible barrier at a minimum 1.5m in a radius away from these individuals.	Slope mitigation works area/ During detailed design/ During construction	Contractor(s)	✓	✓		Implemented	-
S9.7 and 9.10	At the detailed design stage prior to the commencement of the slope mitigation works, a vegetation survey shall be carried out at the slope mitigation areas within the Clear Water Bay Country Park to assess the condition and identify the location of each individual of Marsdenia lachnostoma and other flora species of conservation interest that may be directly affected by the construction works.	Slope mitigation works area/ During detailed design/ During construction	Contractor(s)	✓			Implemented	-
S9.7	Temporary fencing will be installed to fence off the concerned species either in groups of individually within the works area and in the close proximity to prevent from being damaged and disturbed during construction. A sign identifying the site shall be attached to the fence and flagging tape shall be attached to the individuals to visualize their locations.	Slope mitigation works area/ During construction	Contractor(s)		✓		Implemented	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S9.7 and S9.10	A specification for fencing and demarcating individuals of Marsdenia lachnostoma (or other flora species of conservation interest, if found) adjacent to the proposed alignment of the flexible barriers will be prepared to protect the species.	Slope mitigation works area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	Induction training shall also be provided to all site personnel in order to brief them on this flora of conservation interest including the locations and their importance.	Slope mitigation works area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	The resident site supervisory staff will closely monitor the conditions of concerned individuals during construction of flexible barriers in the close proximity.	Slope mitigation works area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	Erect fences along the boundary of the works area before the commencement of works to prevent vehicle movements and encroachment of personnel onto adjacent areas.	All area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	Regularly check the work site boundaries to ensure that they are not breached and that damage does not occur to surrounding areas.	All area/ During construction	Contractor(s)/ ET		✓		Implemented after reminder	-
S9.7	Avoid any damage and disturbance, particularly those caused by filling and illegal dumping, to the surrounding habitats through proper management of waste disposal.	All area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	Reinstate temporarily affected areas, particularly the habitats of plantation and shrubland-grassland immediately after completion of construction works, through on-site tree/shrub planting. The tree/shrub species will be chosen with reference to those in the surrounding area.	All area/ During construction	Contractor(s)		✓		To be Implemented	-
S9.7	Affected habitats within the Clear Water Bay Country Bay shall be reinstated by hydro-seeding and planting of climbers and native shrub seedlings where practical upon completion of the slope mitigation works.	All area/ During construction	Contractor(s)		✓		To be Implemented	-
Landscape & Visual								
S11.10 & 11.11	The construction area and area allowed for temporary structures, such as the contractor's office, will be minimized to a practical minimum. (MM1)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-
S11.10 & 11.11	At the detailed design stage, the design team will seek to minimize the landscape footprint of the Project and above ground facilities, while satisfying all other requirements. (MM2)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S11.10 & 11.11	Design principles will be adopted to take into account the surrounding area, particularly Clear Water Bay Country Park behind and the nearby waterfront, with due consideration given to: - green roofs where practical (i.e. without equipment on the roof); - roadside planting; - aesthetic treatment of all structures; - vertical greening; - screen planting along application site; and - landscape enhancement with amenity planting where practical including planting along the edge (site boundary) fence with native shrubs where feasible, to reduce their visual impact and blend them into the surrounding landscape. (MM3)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	--
S11.10 & 11.11	All trees within the Project Site or the potential slope mitigation works area will be carefully protected during construction according to DEVB TCW No. 10/2013 – Tree Preservation (MM4)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented after reminder	ETWB TCW No. 3/2006 - Tree Preservation.
S11.10 & 11.11	No tree within the Country Park will be felled. Trees within the Site unavoidably affected by the works will be transplanted where necessary and practical. For trees that need to be felled, compensatory planting will be provided to the satisfaction of relevant Government departments. A compensatory tree planting proposal including locations of tree compensation will be submitted to seek relevant government department's approval, in accordance with DEVB TC(W) No. 10/2013. (MM5)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	DEVB TC(W) No. 10/2013
S11.10 & 11.11	Any slope mitigation works necessary to address natural terrain hazards, will be minimized to minimize any potential environmental impact to the Country Park e.g. soil nailing and rock stabilization will aim to avoid existing trees e.g. should any restoration of vegetation be necessary, the best planting matrix with native species will be established, with the aim of resembling the existing vegetation. (MM6)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	N/A	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S11.10 & 11.11	Dredging works for the installation of intake structures and outfall diffusers should be minimized to avoid or reduce any potential environmental impacts to as low as reasonably practicable (ALARP). The intake and outfall structures (e.g. intake openings and diffuser heads) will be prefabricated and transferred to site for installation. (MM7)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-
S11.10 & 11.11	All night-time lighting will be reduced to a practical minimum both in terms of number of level and will be hooded and directional. (MM8) units and lux level and will be hooded and directional. (MM8)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-
Landfill Gas Hazard								
S12.7	During all works, safety procedures should be implemented to minimise the risks of fires and explosions, asphyxiation of workers and toxicity effects resulting from contact with contaminated soil and groundwater.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	During trenching and excavation as well as creation of confined spaces at near to or below ground level, precautions should be clearly laid down and rigidly Gas detection equipment and appropriate breathing apparatus should be available and used when entering confined spaces or trenches deeper than 1 meter.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	The Contractor should make the workers are aware of potential hazards of working in confined spaces (any chamber, manhole or culvert which is large enough to permit access to personnel). Such work in confined spaces is controlled by the Factories and Industrial Undertakings (Confined Spaces) Regulations of the Factories and Industrial Undertakings Ordinance. Following the Safety Guide to Working in Confined Spaces ensures compliance with the above regulations.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	Safety officers, specifically trained with regard to landfill gas and leachate related hazards and the appropriate actions to take in adverse circumstances, should be present on the site throughout the works, in particular, when works are undertaken below grade.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	All personnel who work on site and all visitors to the site should be made aware of the possibility of ignition of gas in the vicinity of the works, the possible presence of contaminated water and the need to avoid physical contact with it.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S12.7	Monitoring for landfill gas should be undertaken in all excavations, manholes, chambers (particularly during pipe jacking) and any confined spaces through the use of an intrinsically safe portable instrument, appropriately calibrated and capable of measuring the concentrations of methane, carbon dioxide and oxygen.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	Monitoring frequency and areas to be monitored should be specified prior to commencement of groundwork, either by the Safety Officer, or by an appropriately qualified person. All measurements should be recorded and documented.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	Proceed drilling with adequate care and precautions against the potential hazards which may be encountered.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	Prior to the commencement of the site works, the drilling contractor should devise a 'method-of- working' statement covering all normal and emergency procedures (including but not limited to number of operatives, experience and special skills of operatives, normal method of operations, emergency procedures, supervisors responsibilities, storage and use of safety equipment, safety procedures and signs, barriers and guarding). The site supervisor and all operatives must be familiar with this statement.	All area/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	Where below ground service entries are necessary to the Incoming Switchgear Room, 132 kV Substation and Chlorine Store (I) and (II), the entry point should be sealed to prevent gas entry. In addition, any below grade cable trenches entering the Incoming Switchgear Room and 132 kV Substation can become the pathway for landfill gas and hence gridded metal covers should be used.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	N/A	-
S12.7	It is recommended regular landfill gas monitoring should be carried out at the Incoming Switchgear Room, 132 kV Substation and Chlorine Store (I) and (II). The monitoring frequency will be monthly for the first year of operation. If the monitoring results show no sign of landfill gas migration, reduce the monitoring frequency to once every six months.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	N/A	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S12.7	The manholes and utility pits within the Project Site and along the freshwater mains. Each manhole/ utility pit should be monitored with two measurements (at mid depth and base). Each measurement should be monitored for a minimum of 10 minutes. A steady reading and peak reading should be recorded at each manhole/ utility pit and for each measurement. The need for venting the manhole/ utility pit and further monitoring will be reviewed after the initial monitoring.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	All construction, operation and maintenance personnel working on-site as well as visitors should be made aware of the hazards of landfill gas and its possible presence on-site. This should be achieved through a combination of posting warning signs in prominent places and also by access to detailed information on landfill gas hazards and the designs and procedural means by which these hazards are being minimized on-site.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-





Note: D – Design stage C – Construction O – Operation

Appendix D


Water Quality Monitoring Graphical Presentation

- Appendix D.1 Weather Condition
- Appendix D.2 Other Factor Might Affect the Monitoring Results


Monitoring Location: CE

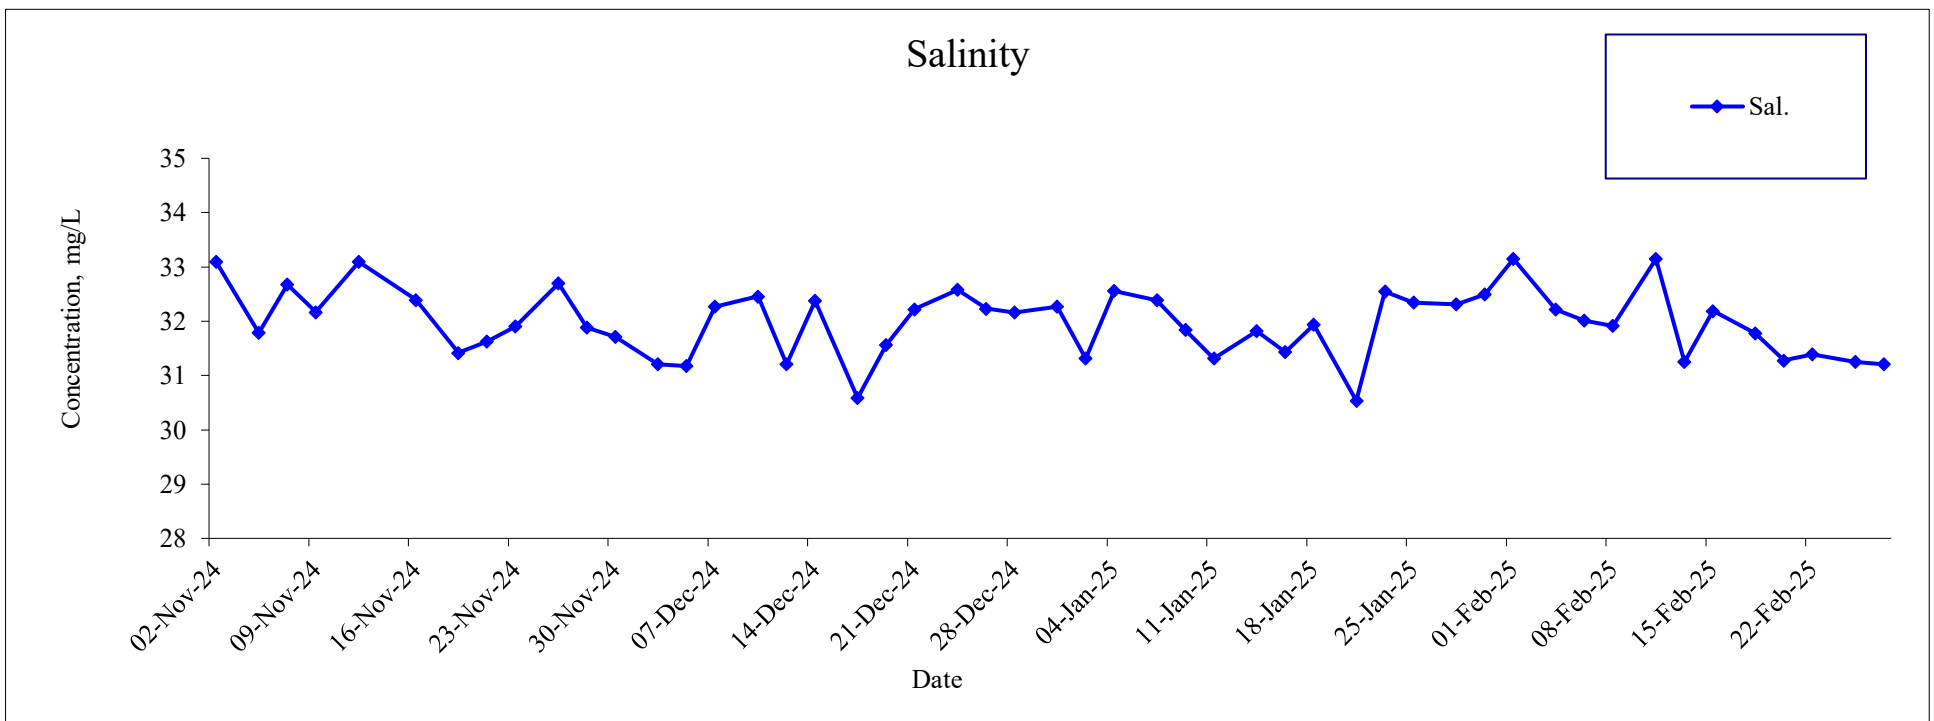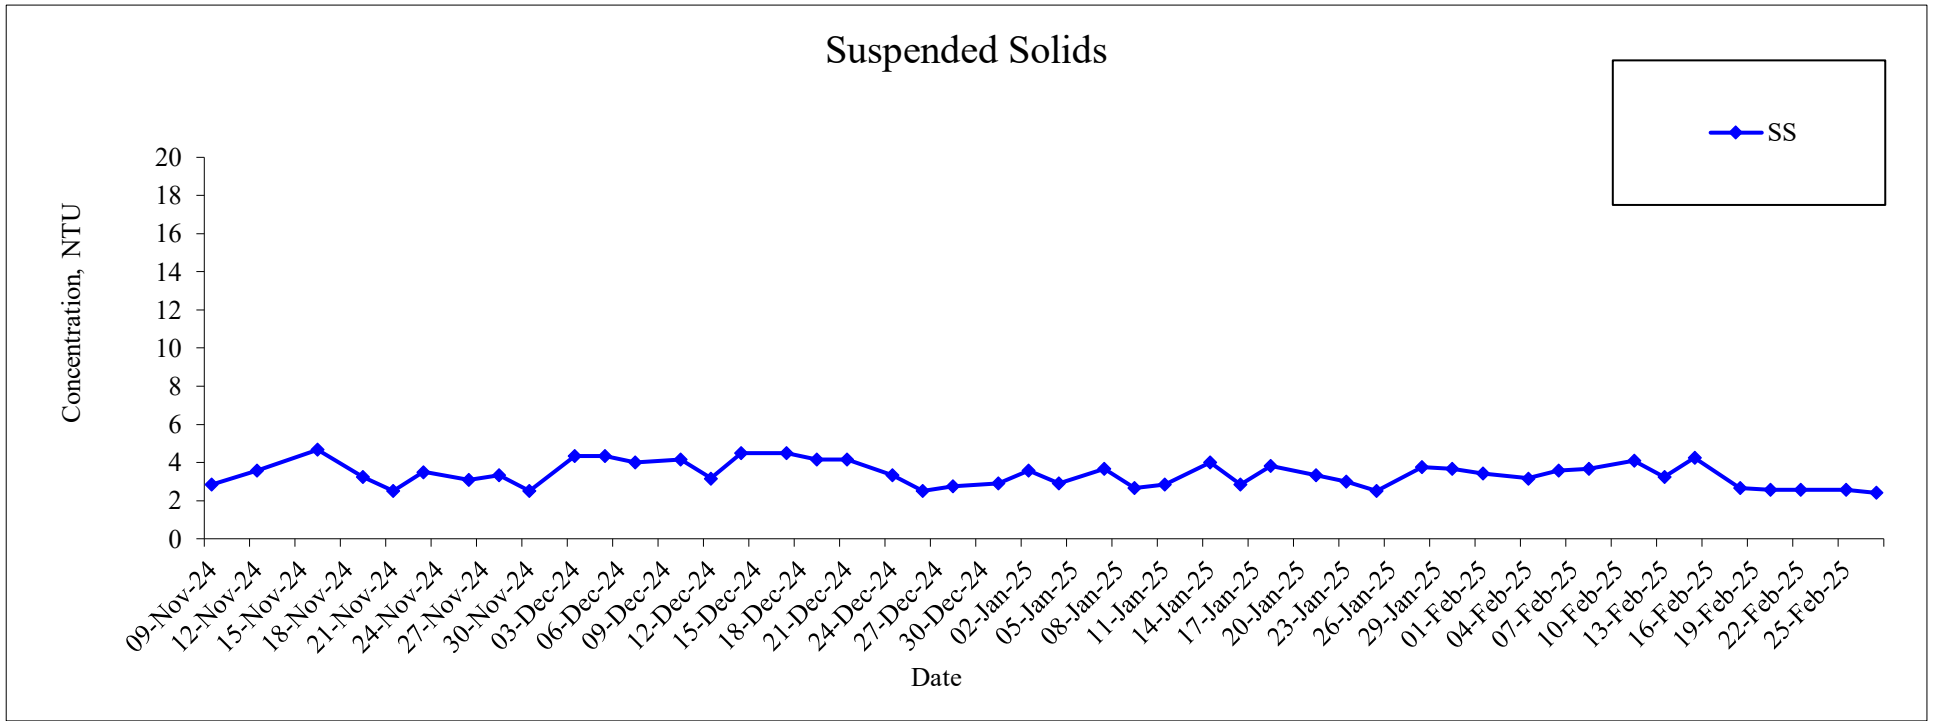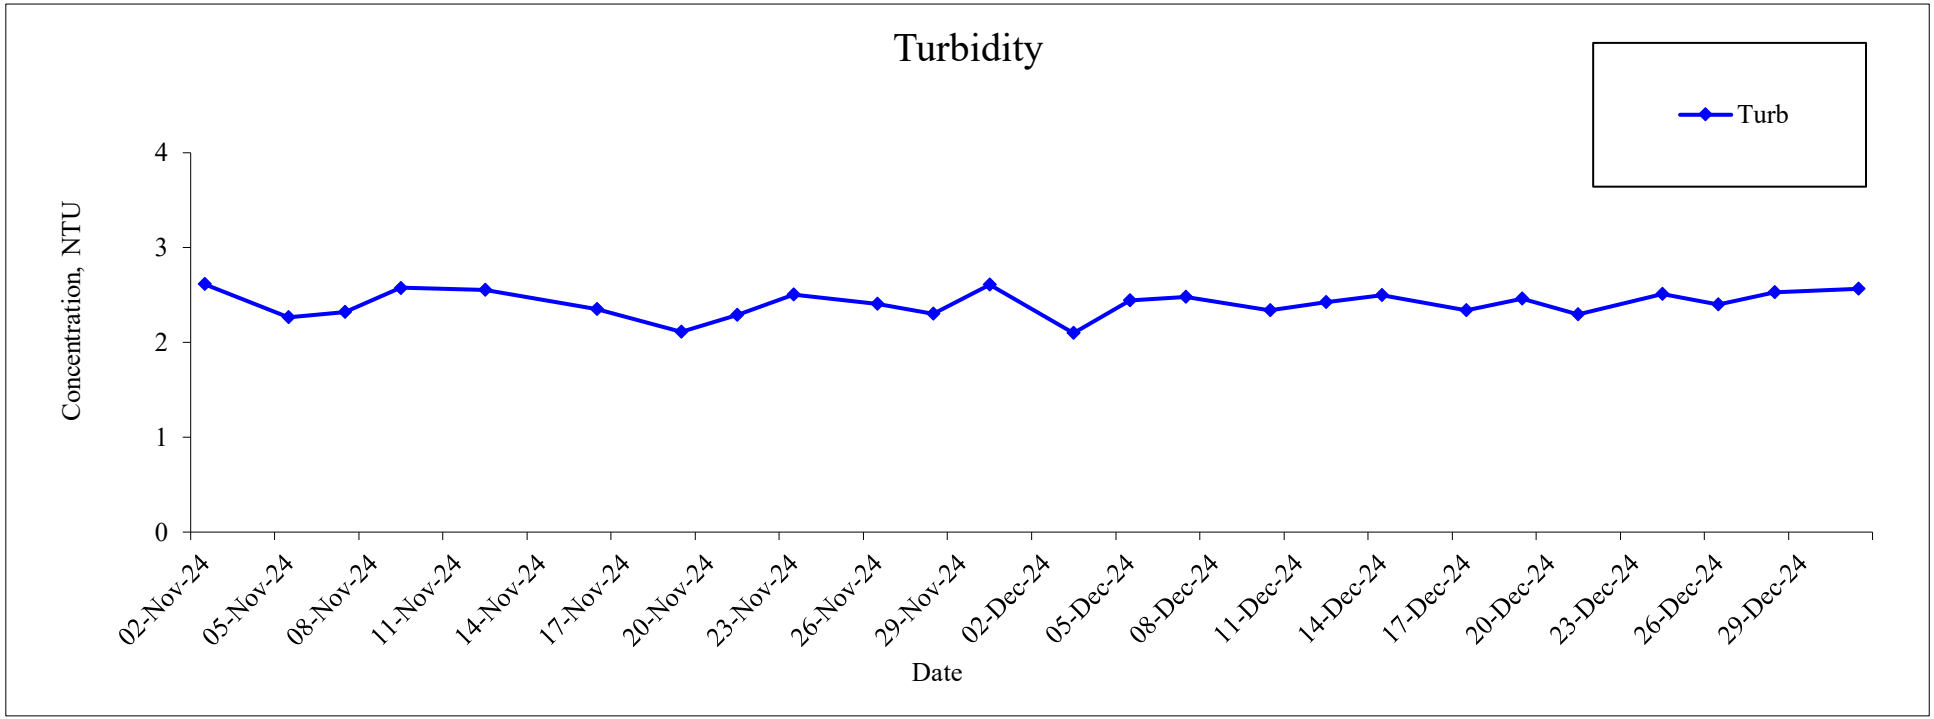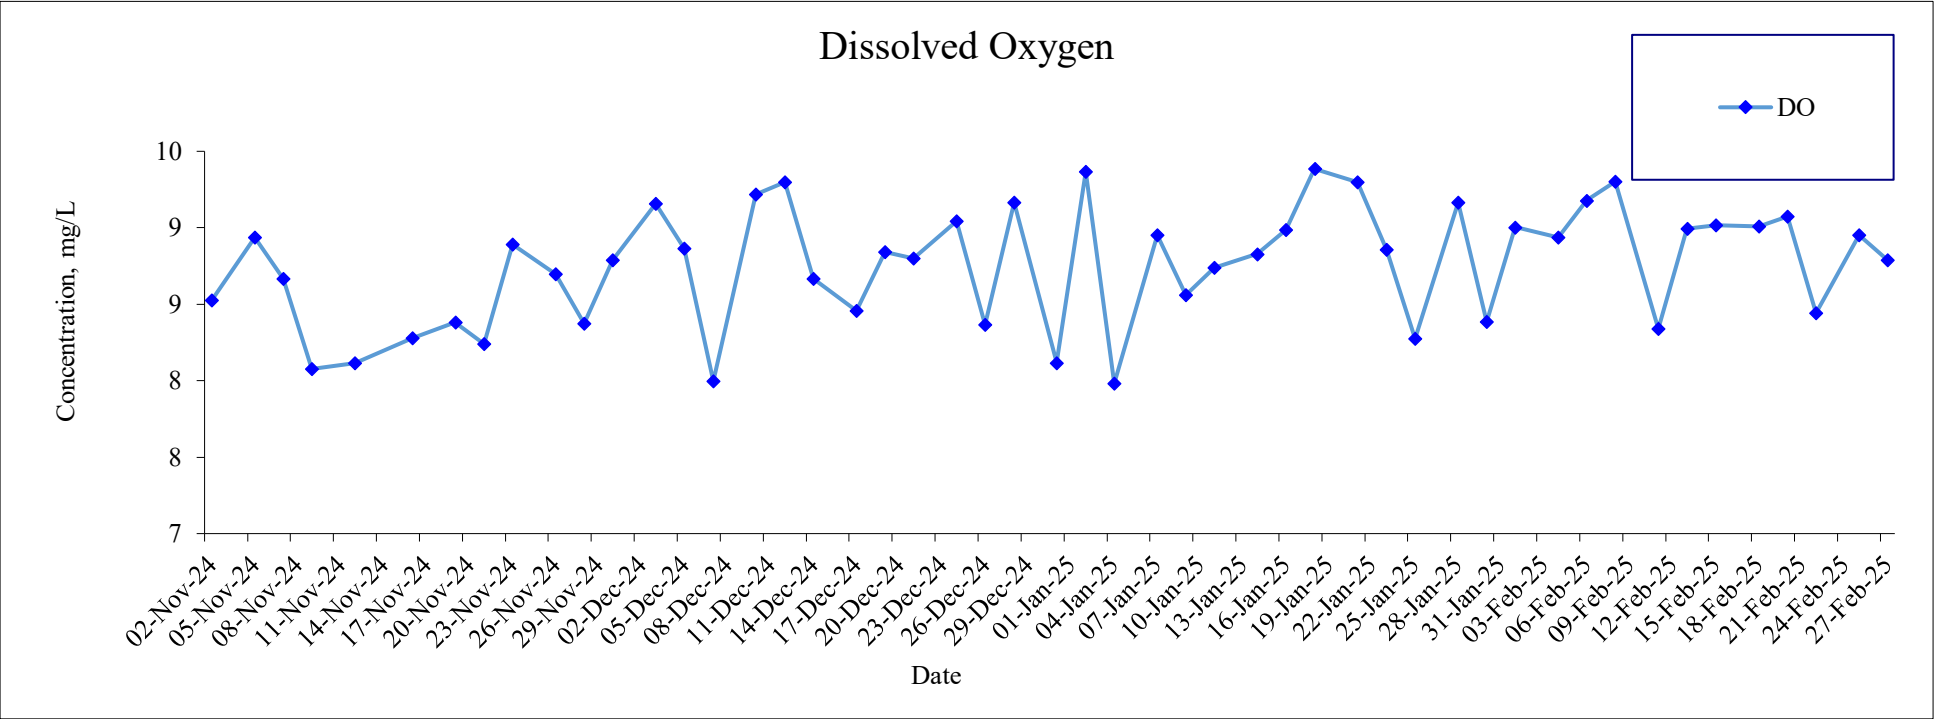

Monitoring Location: CE




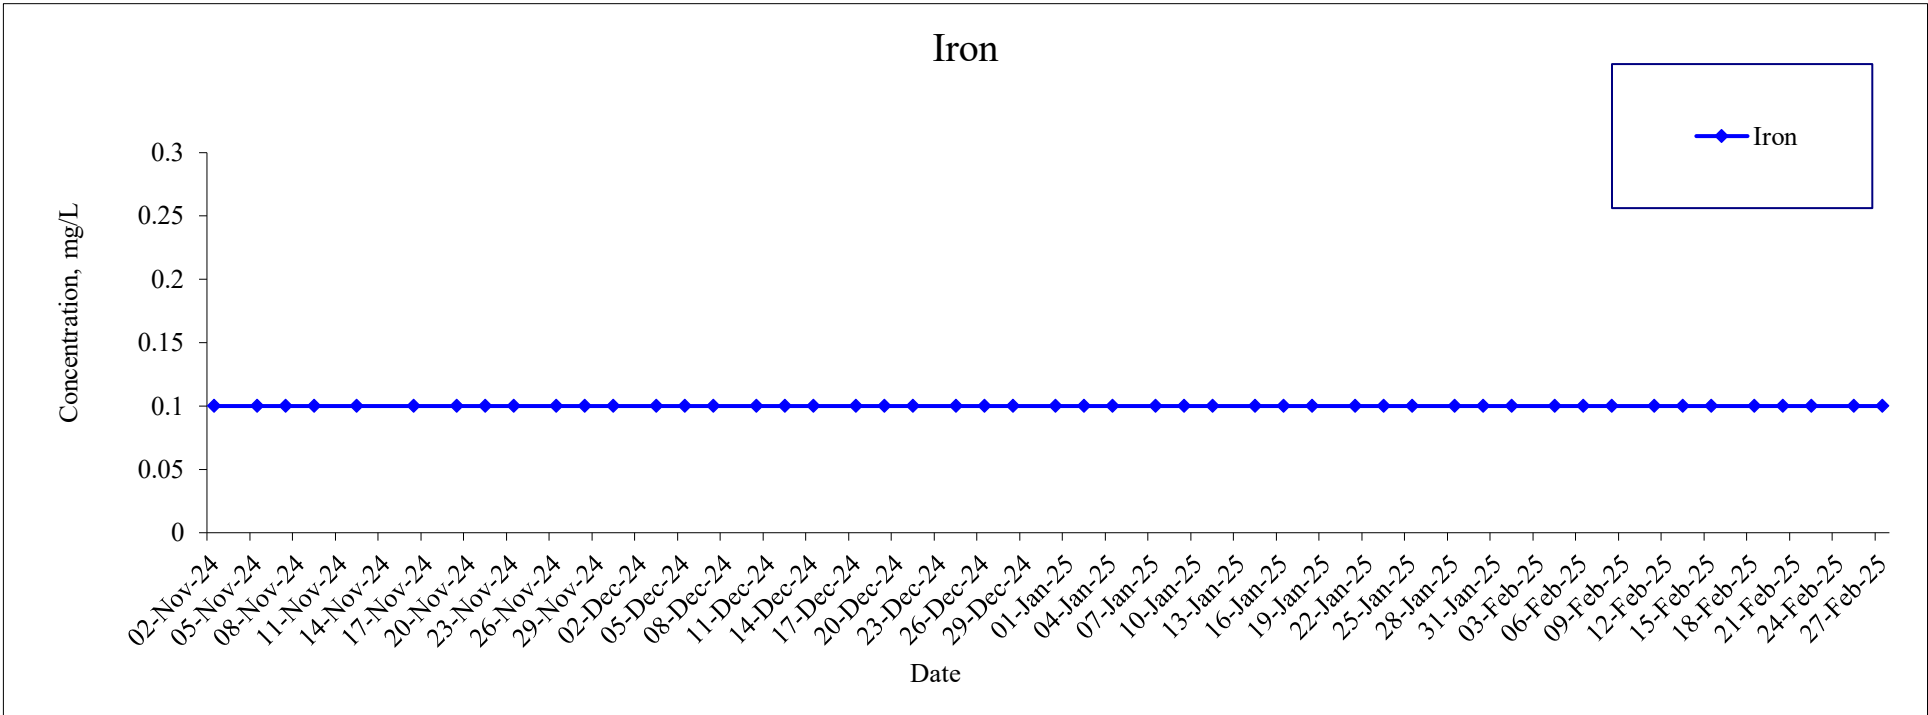


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

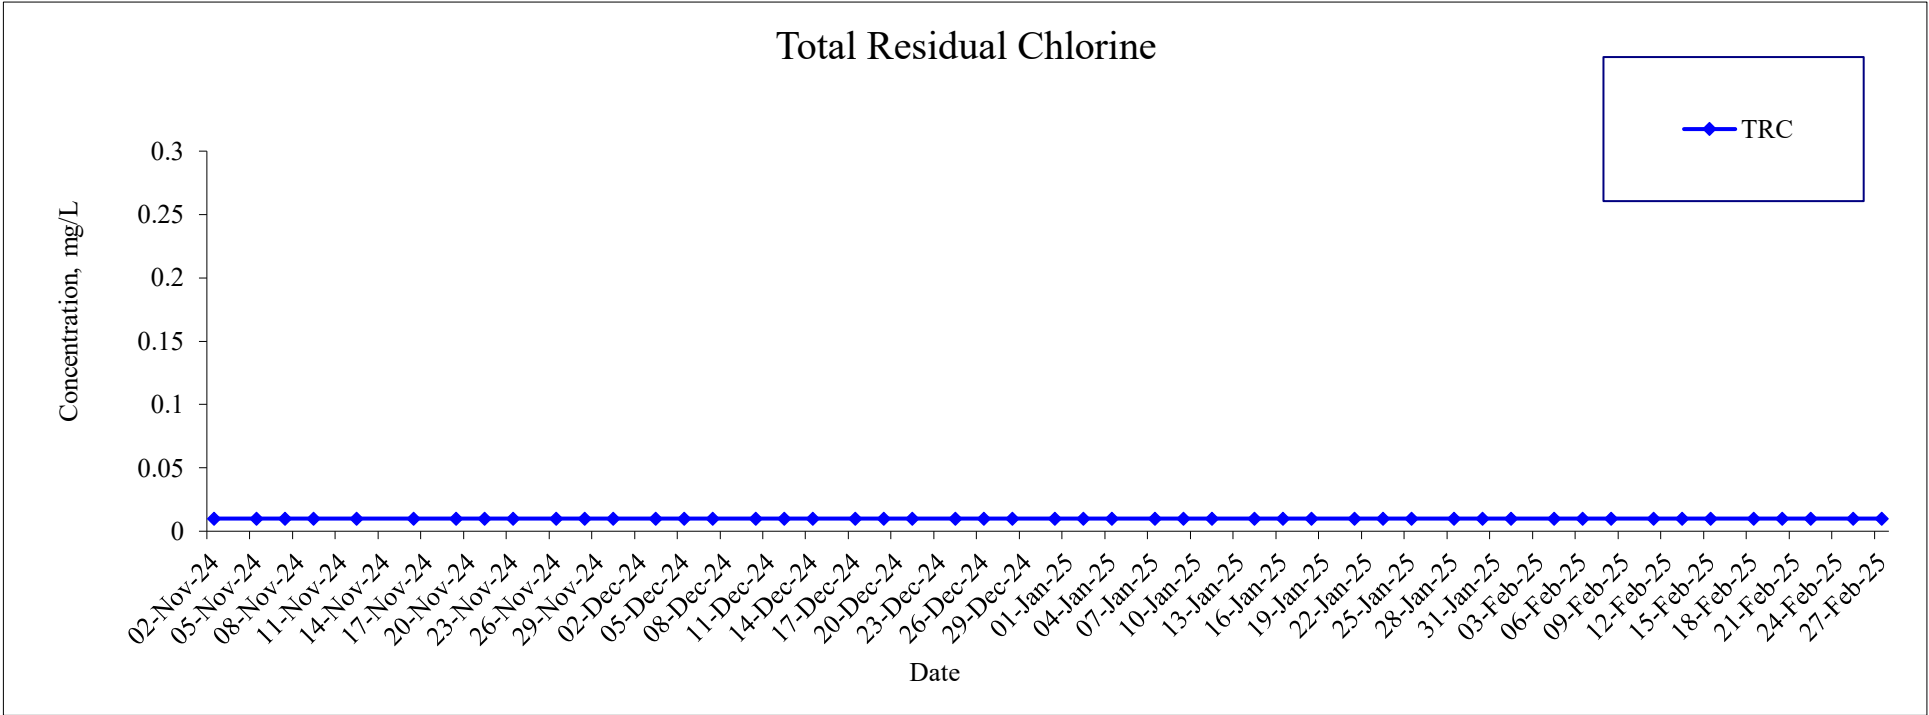


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: CF

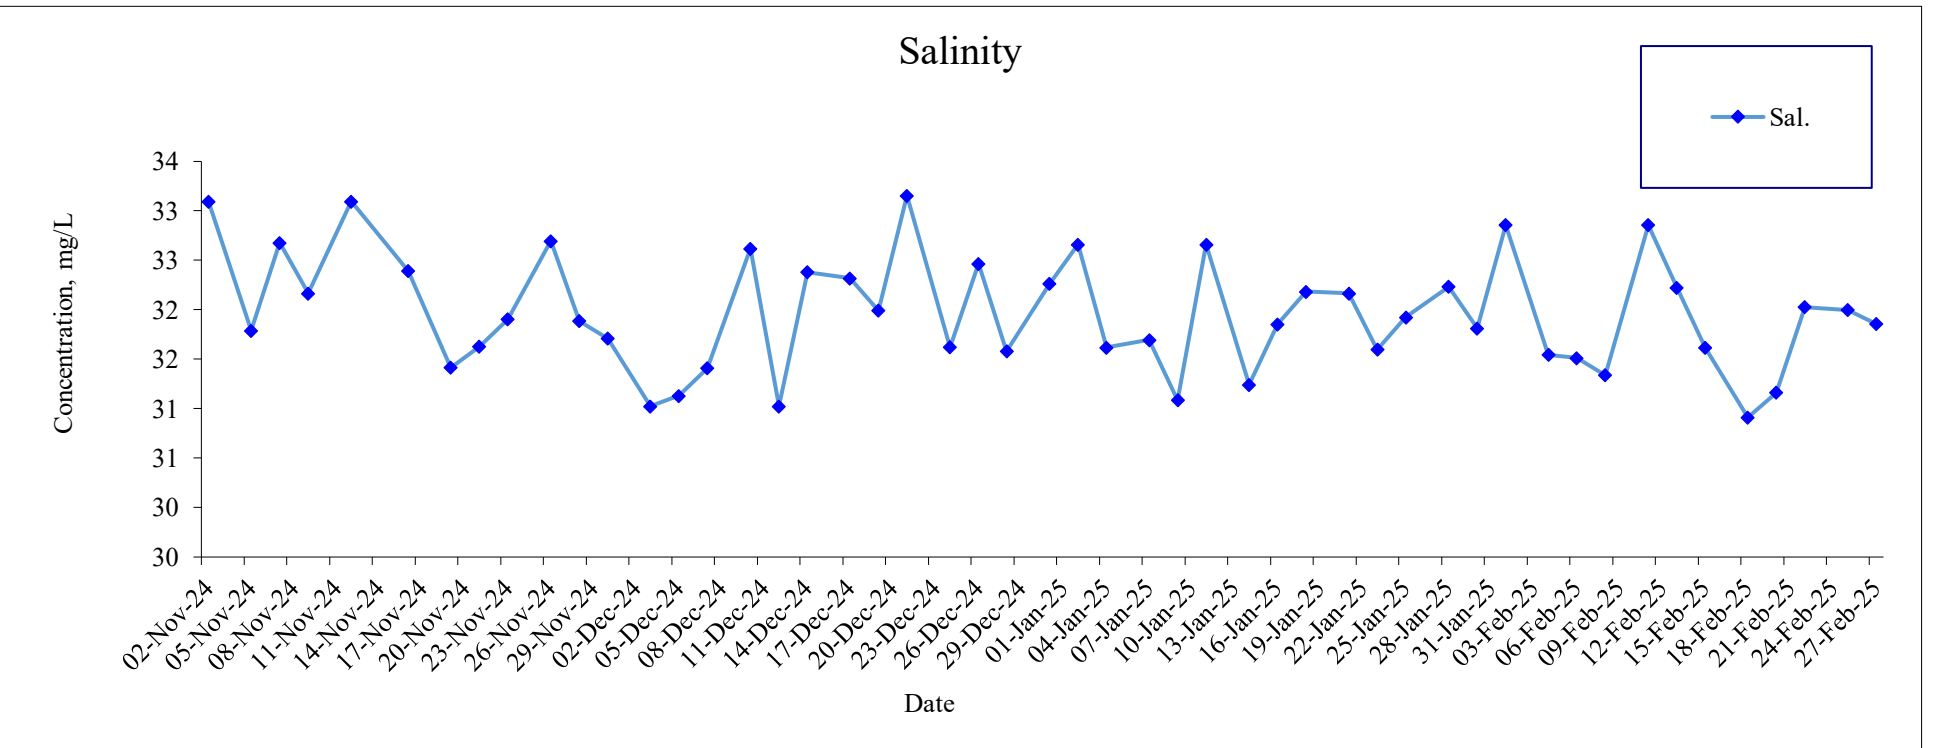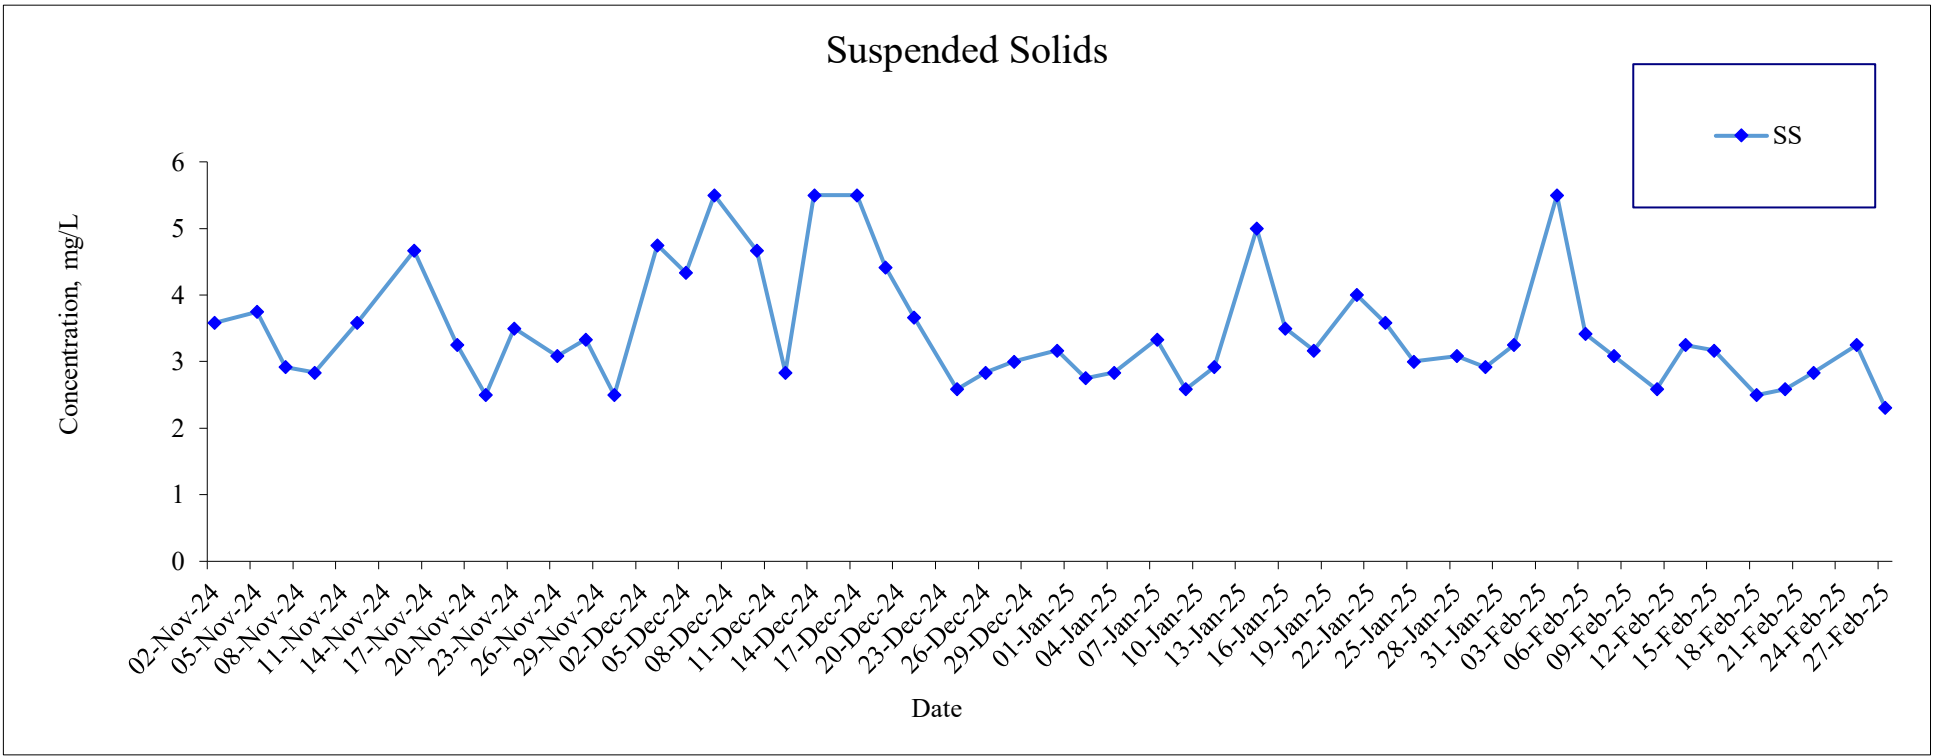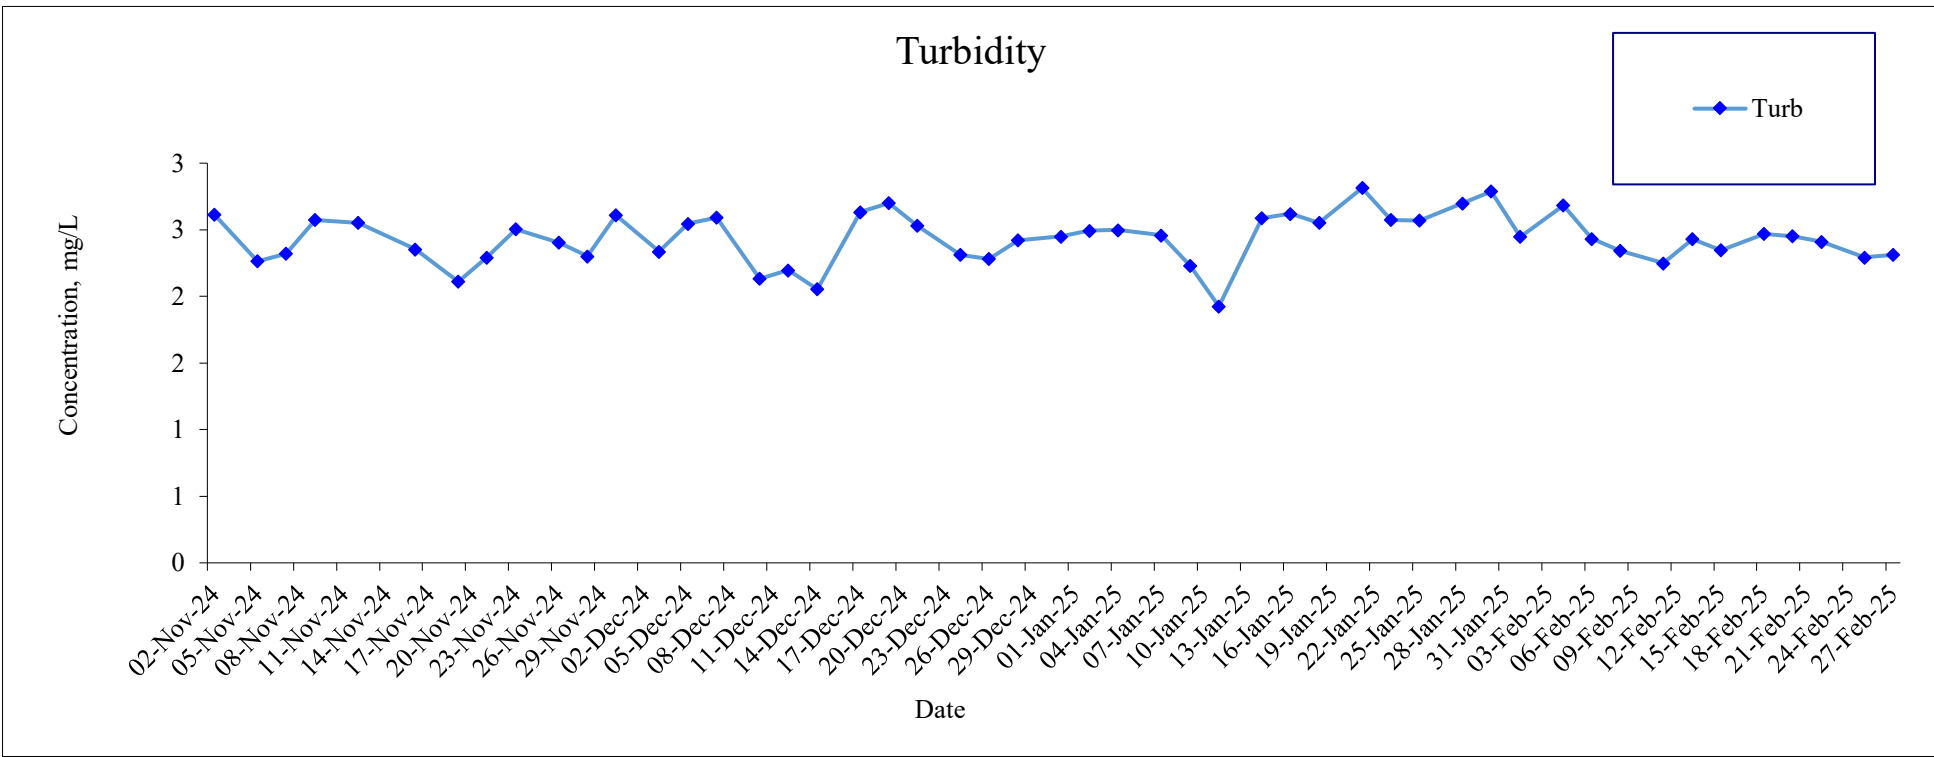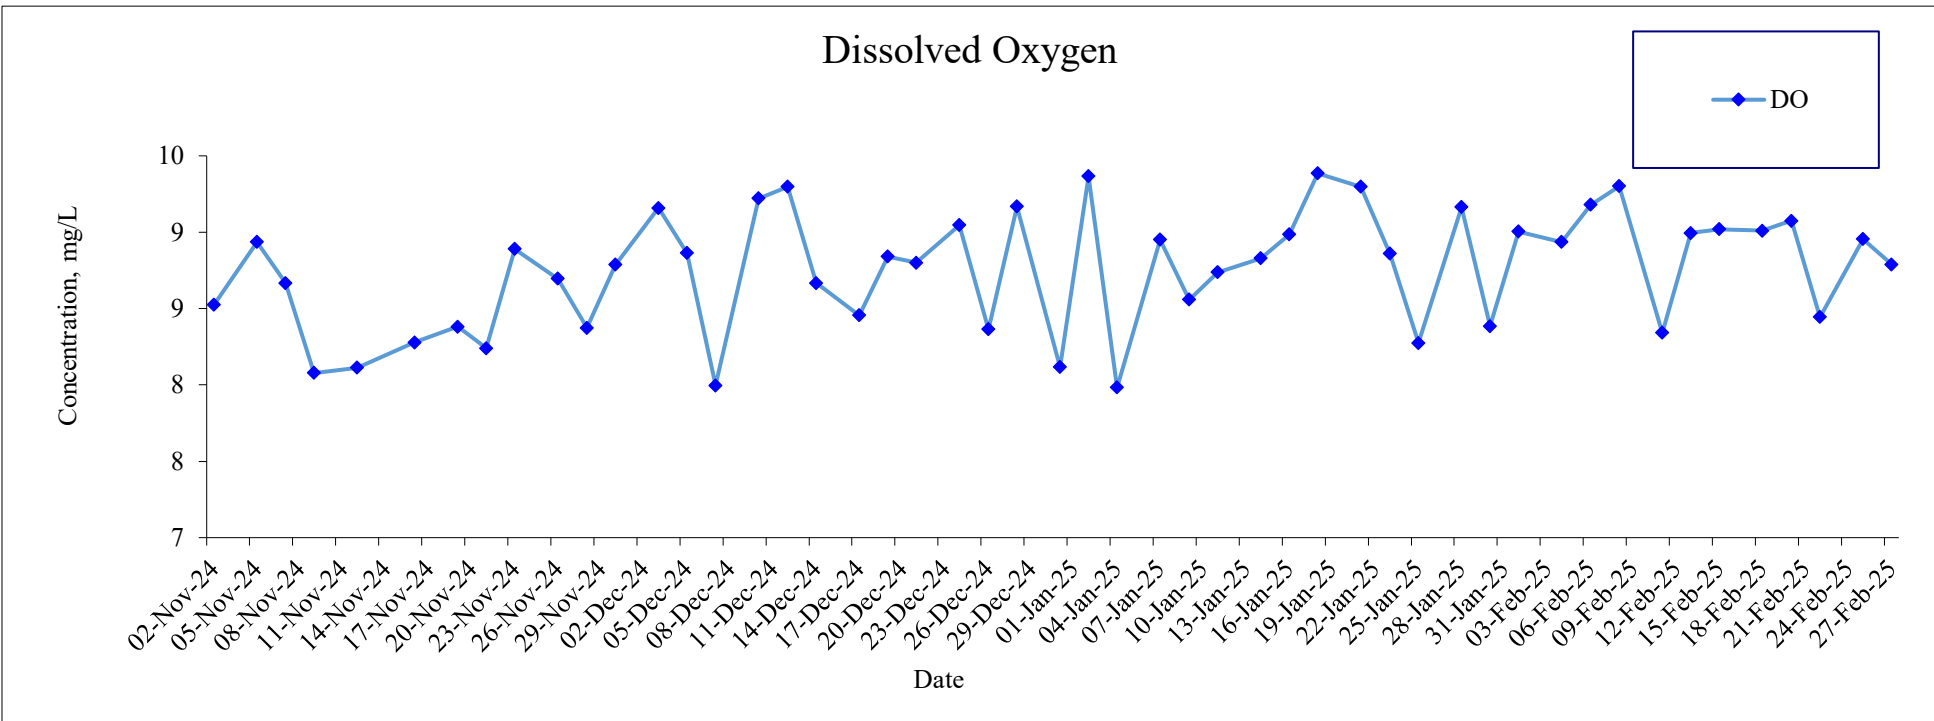

Monitoring Location: CF




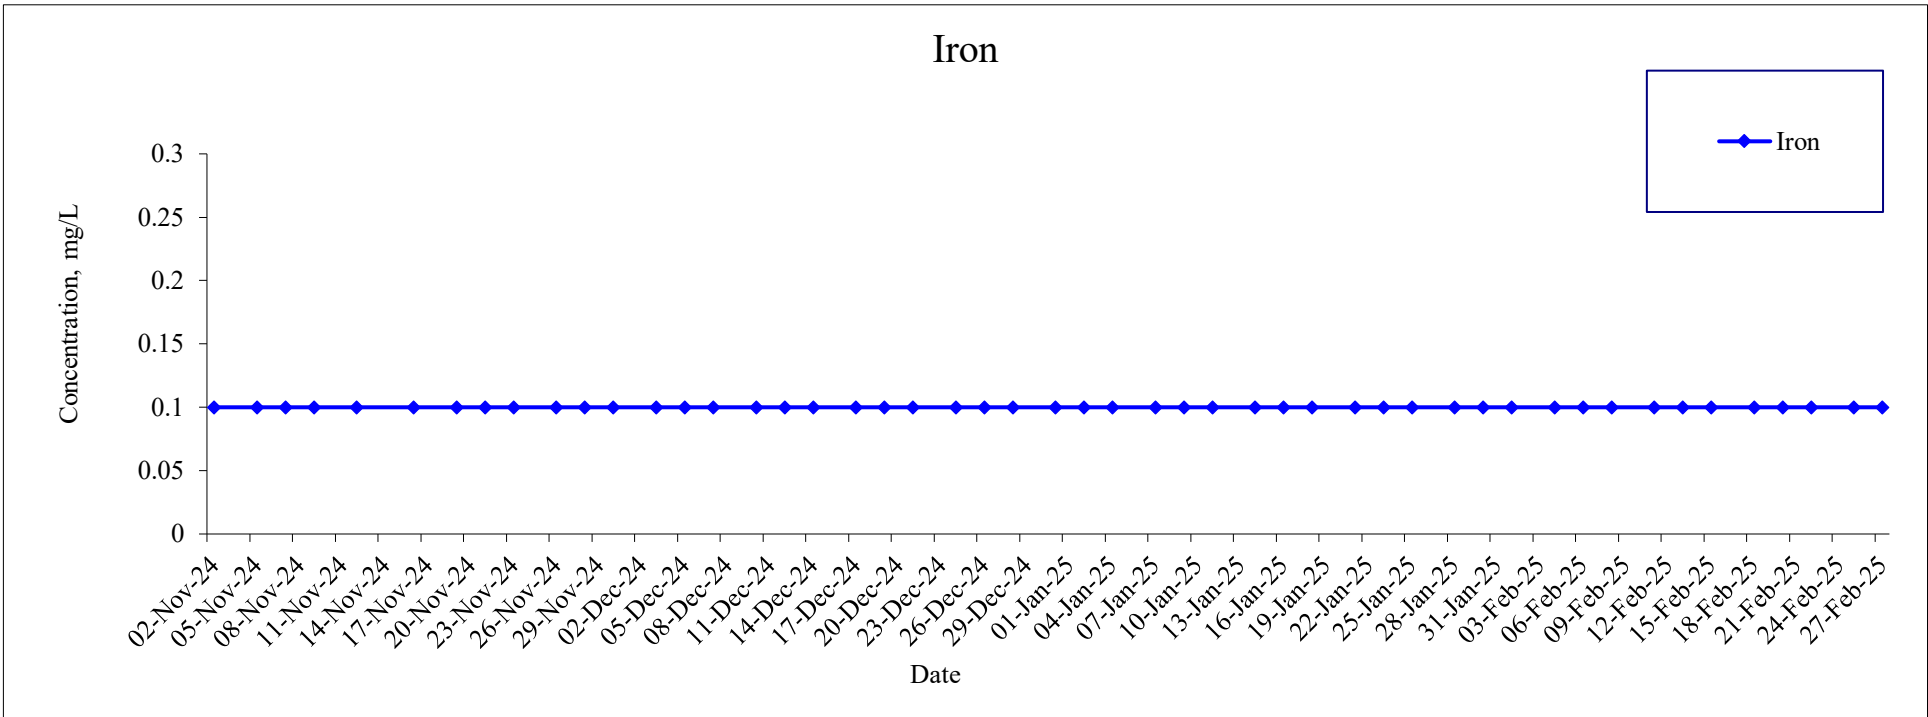


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

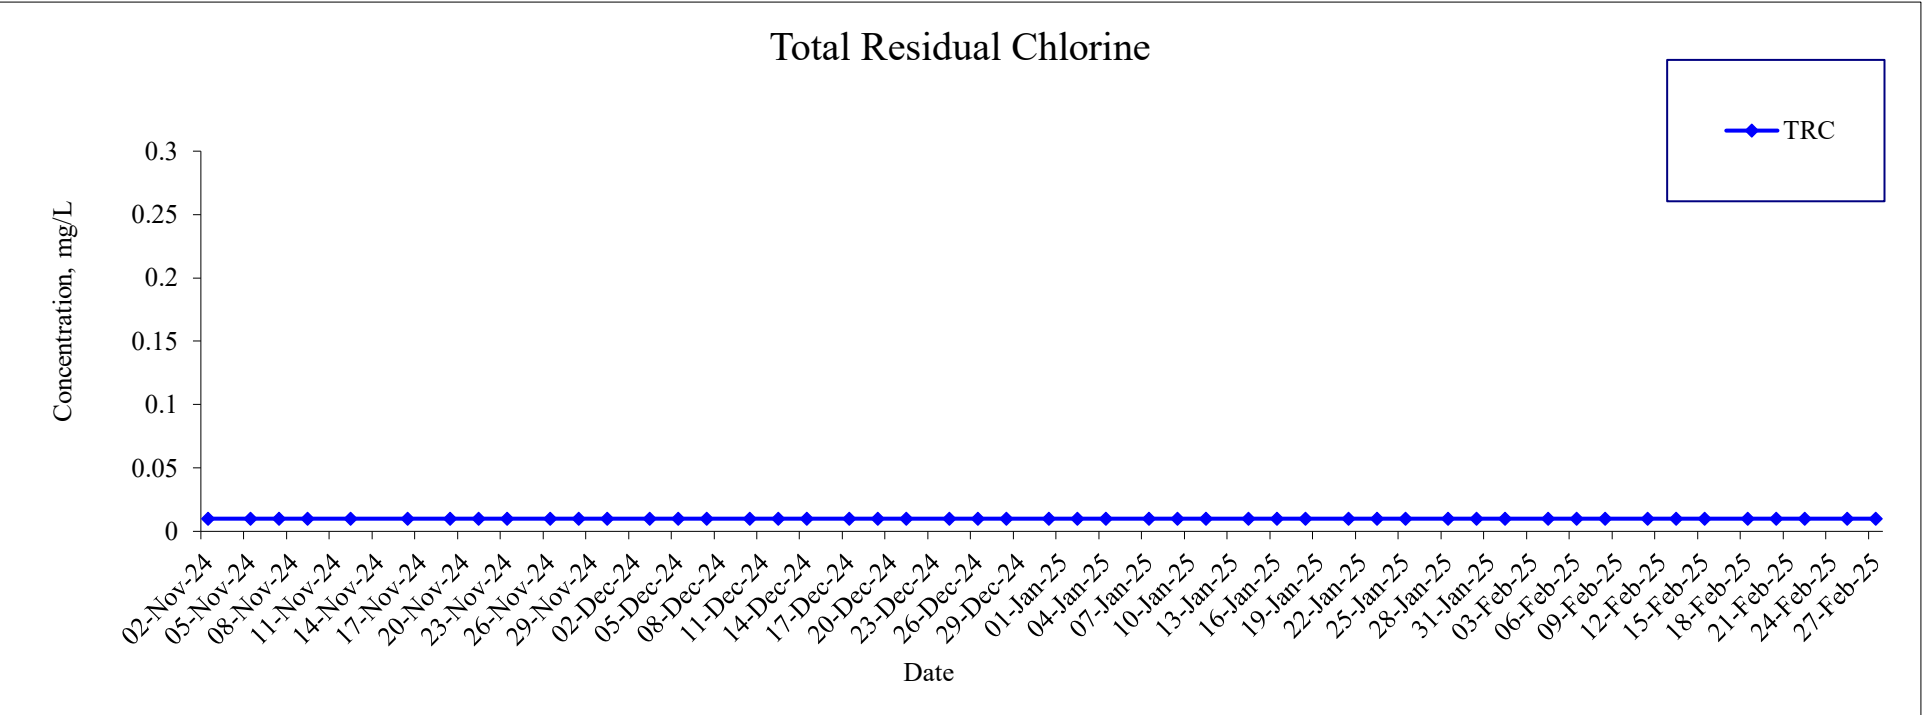


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR1

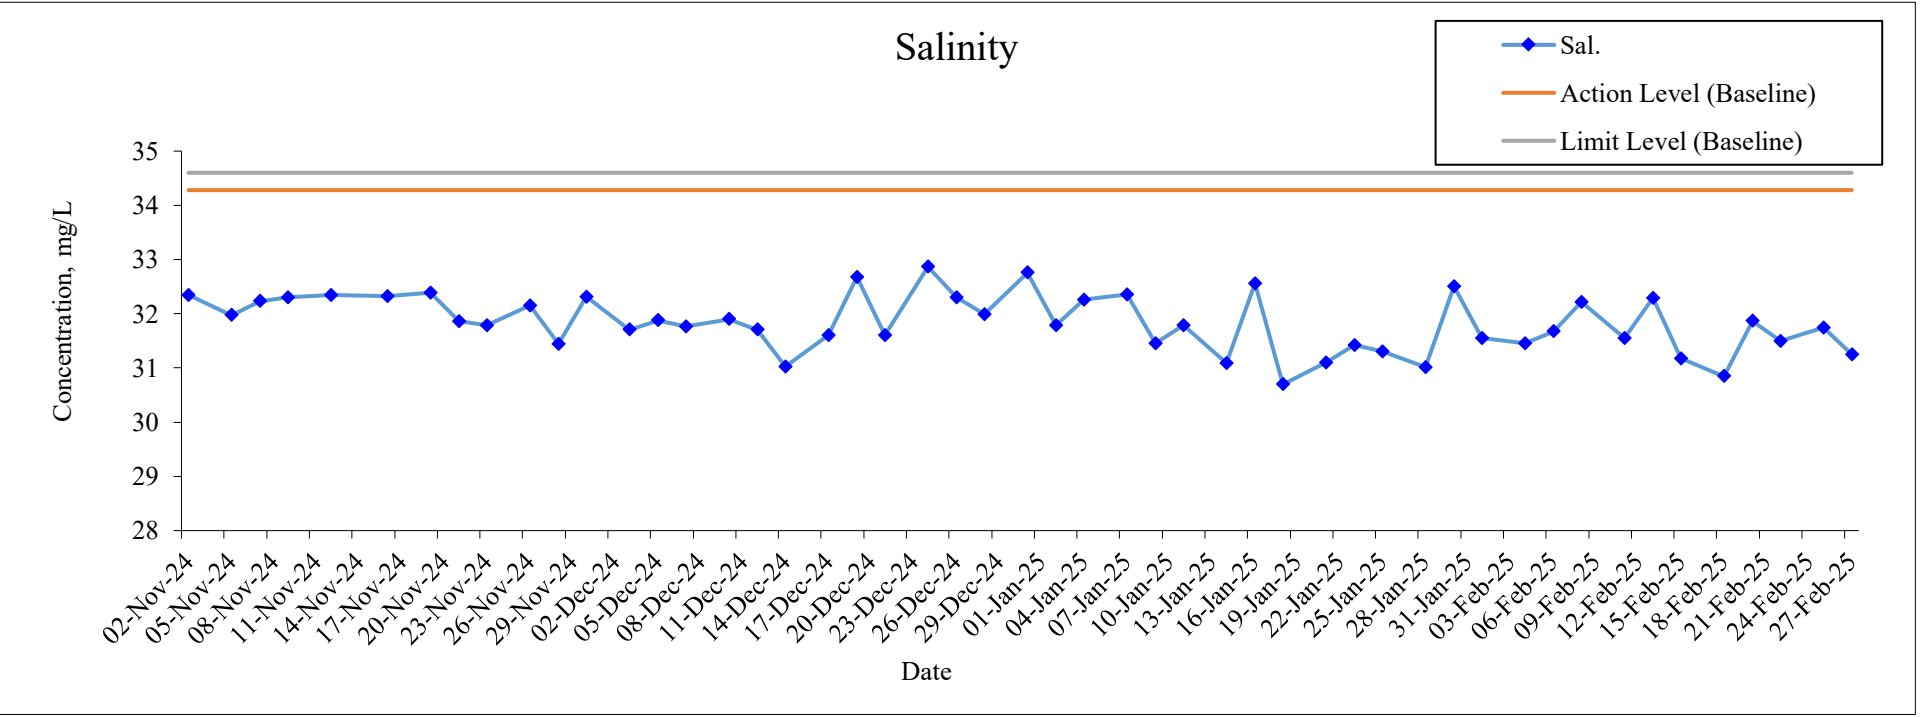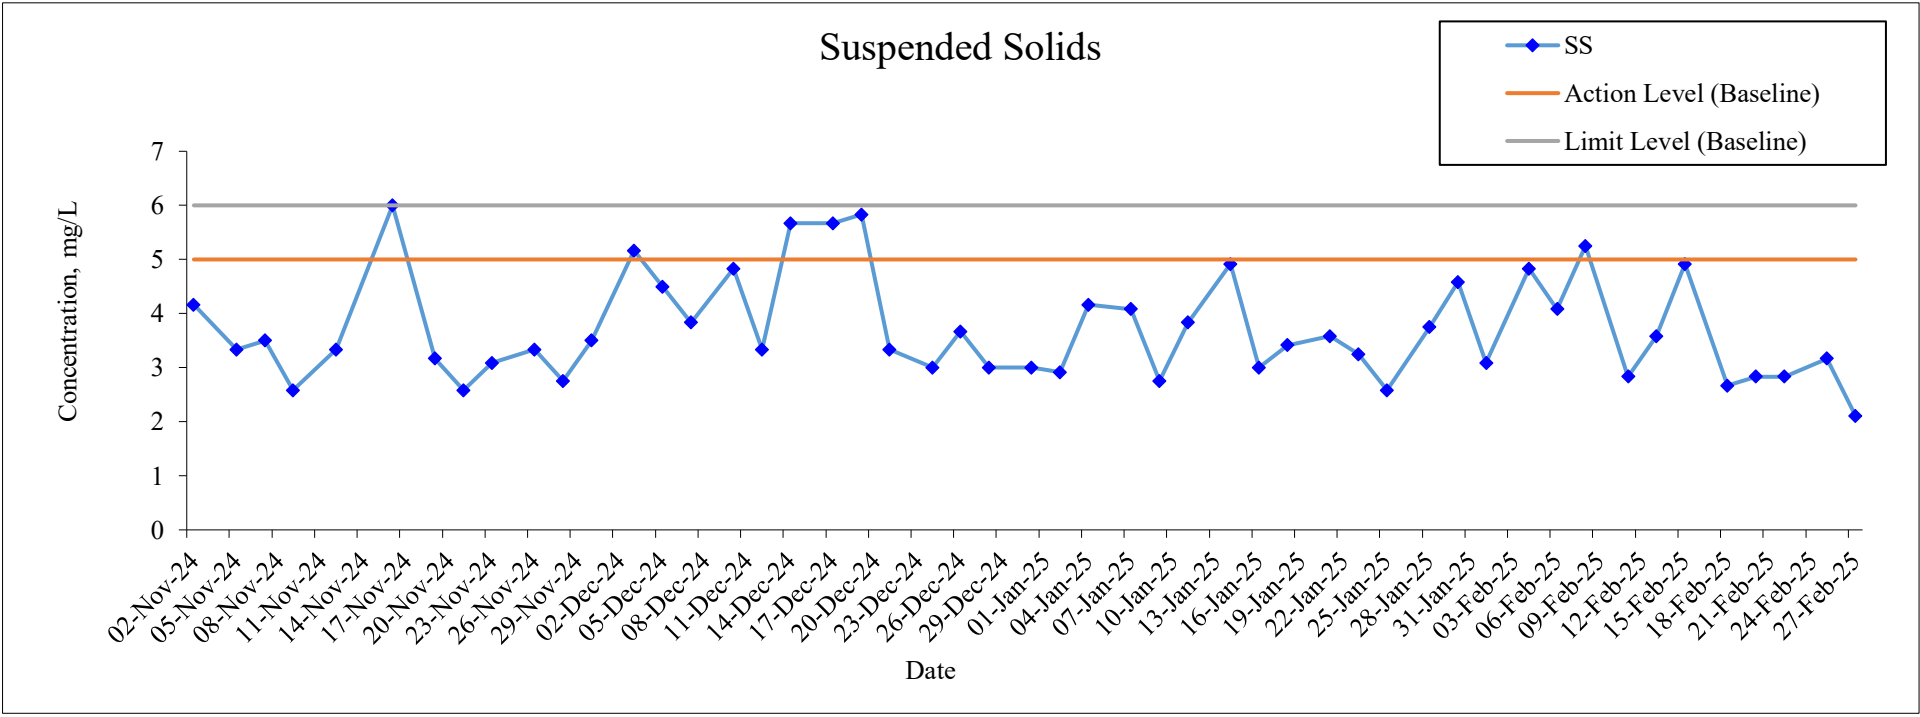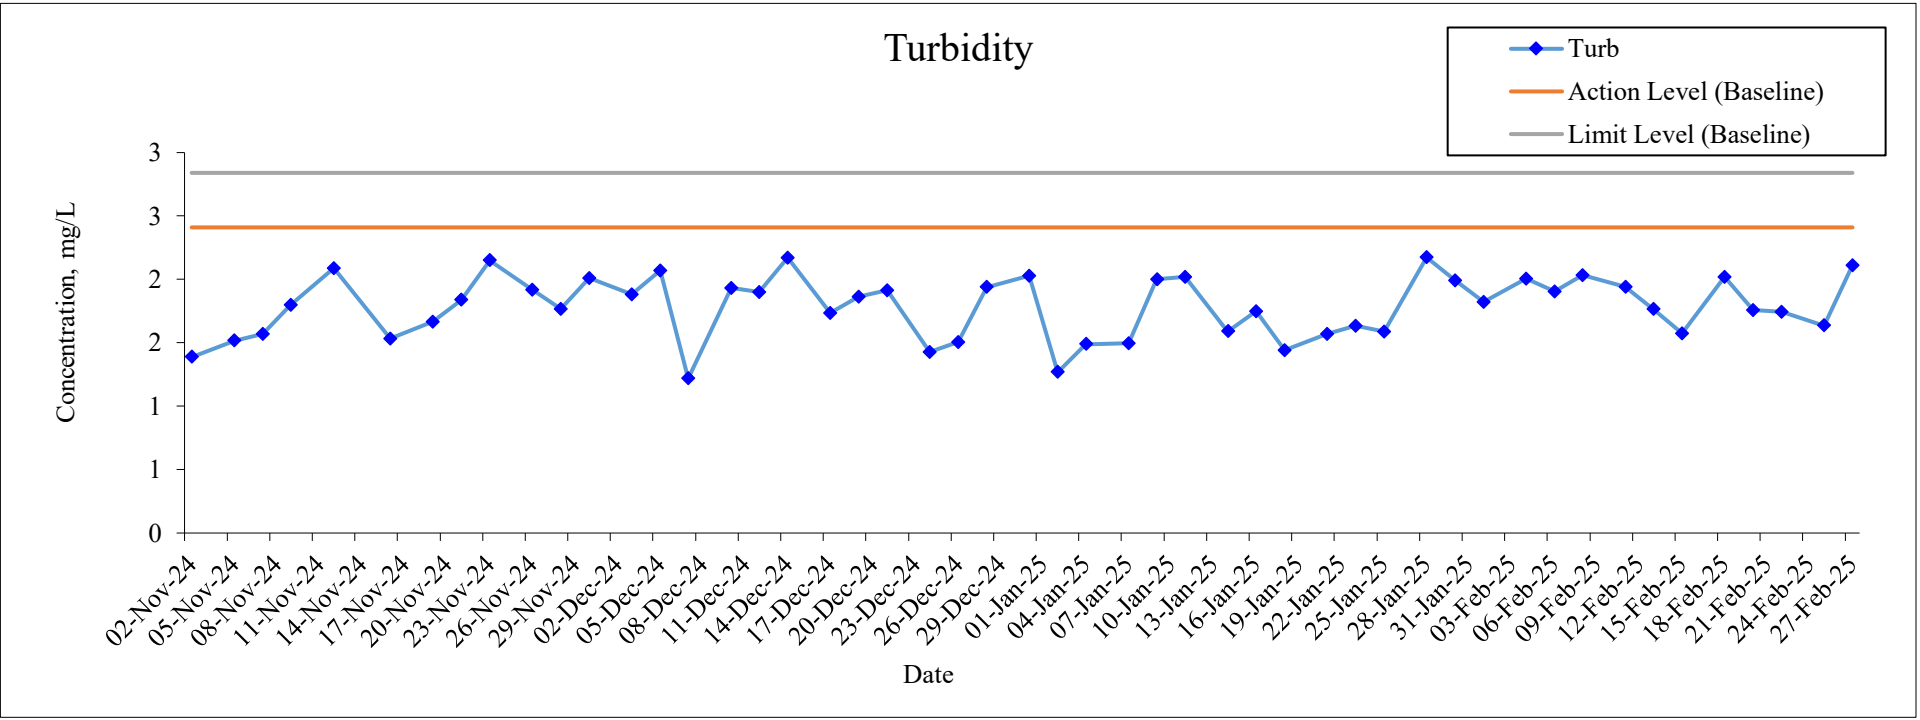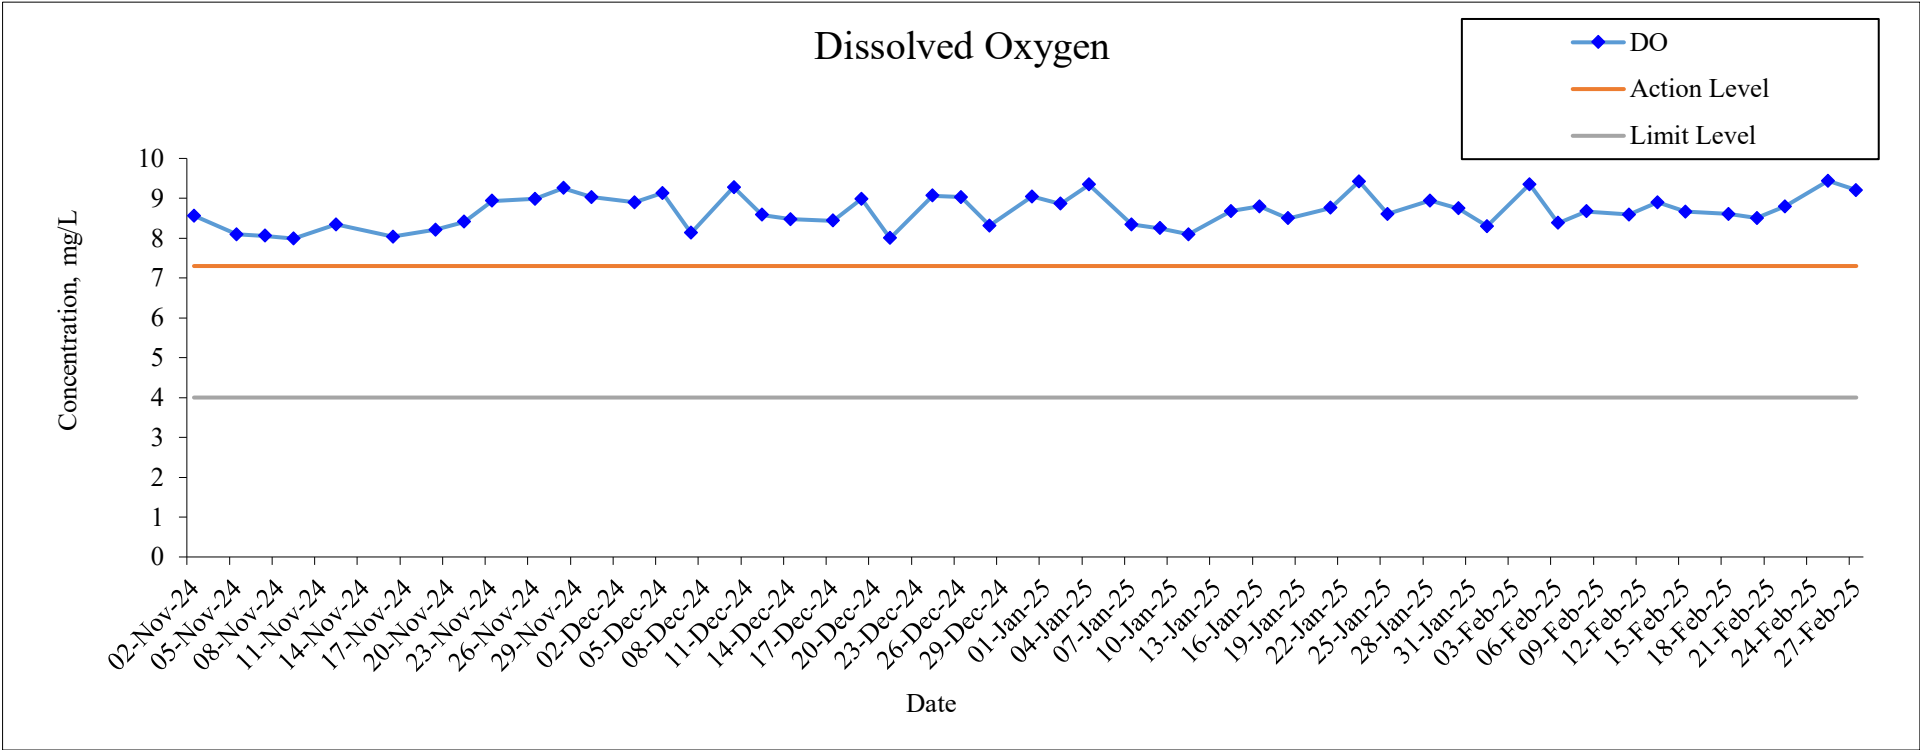

Monitoring Location: WSR1




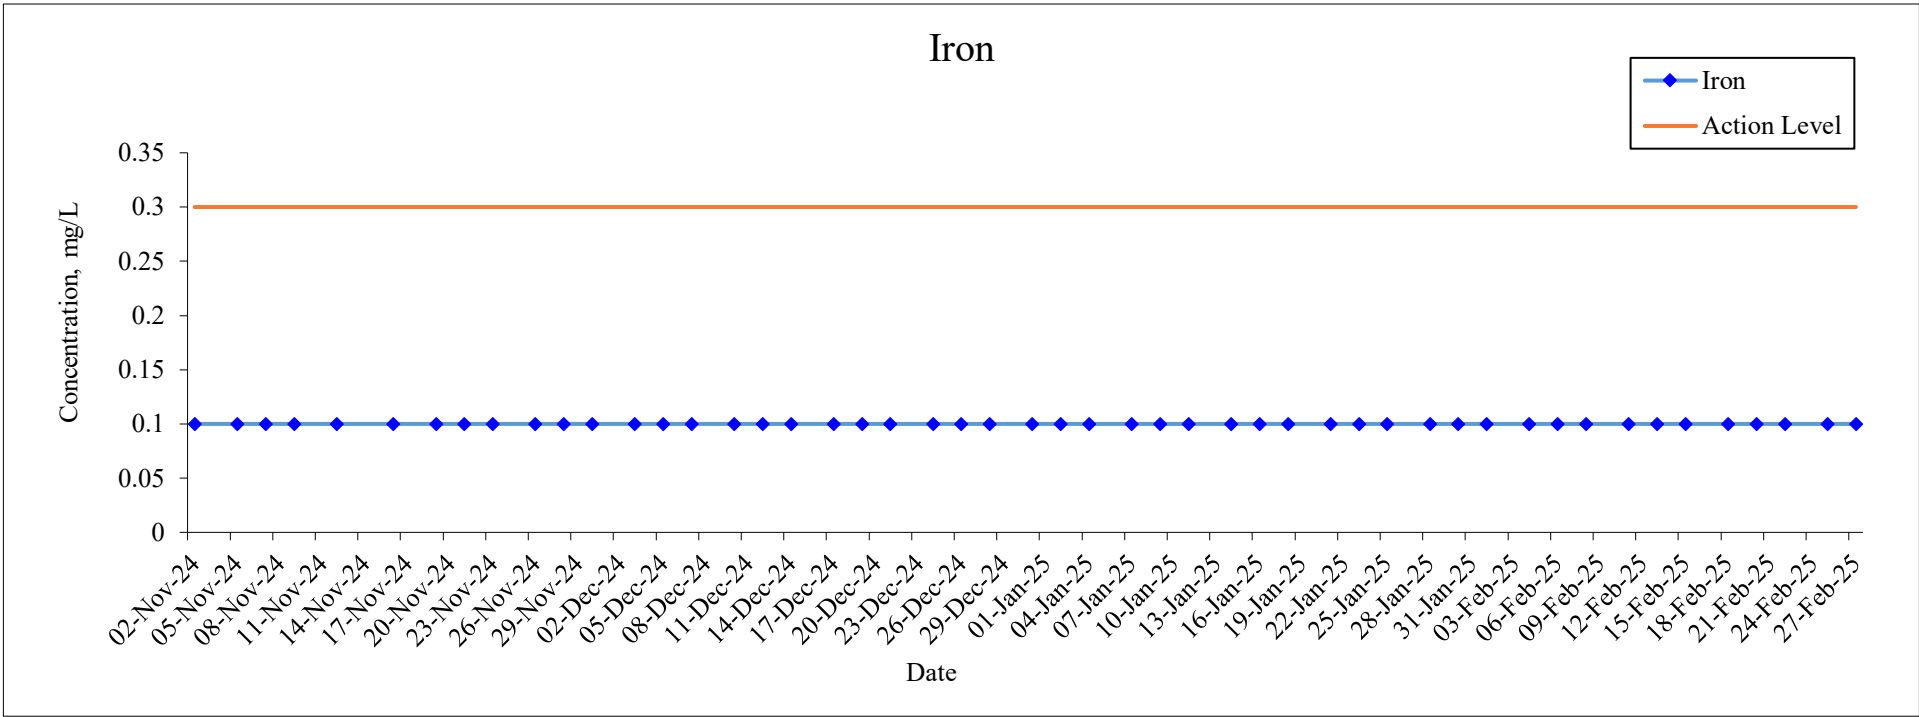


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

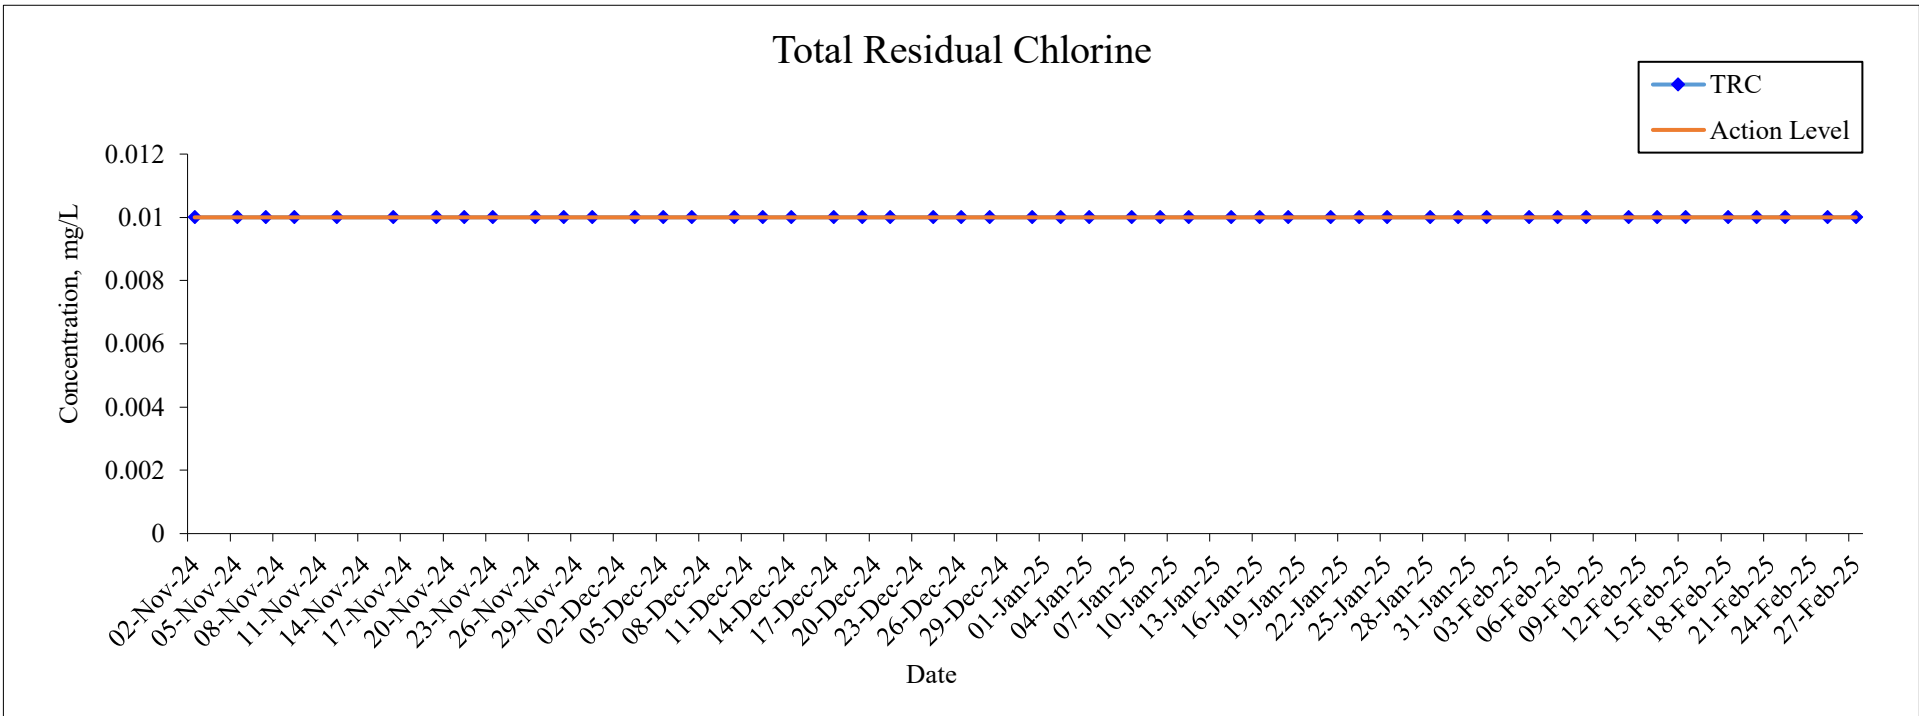


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR2

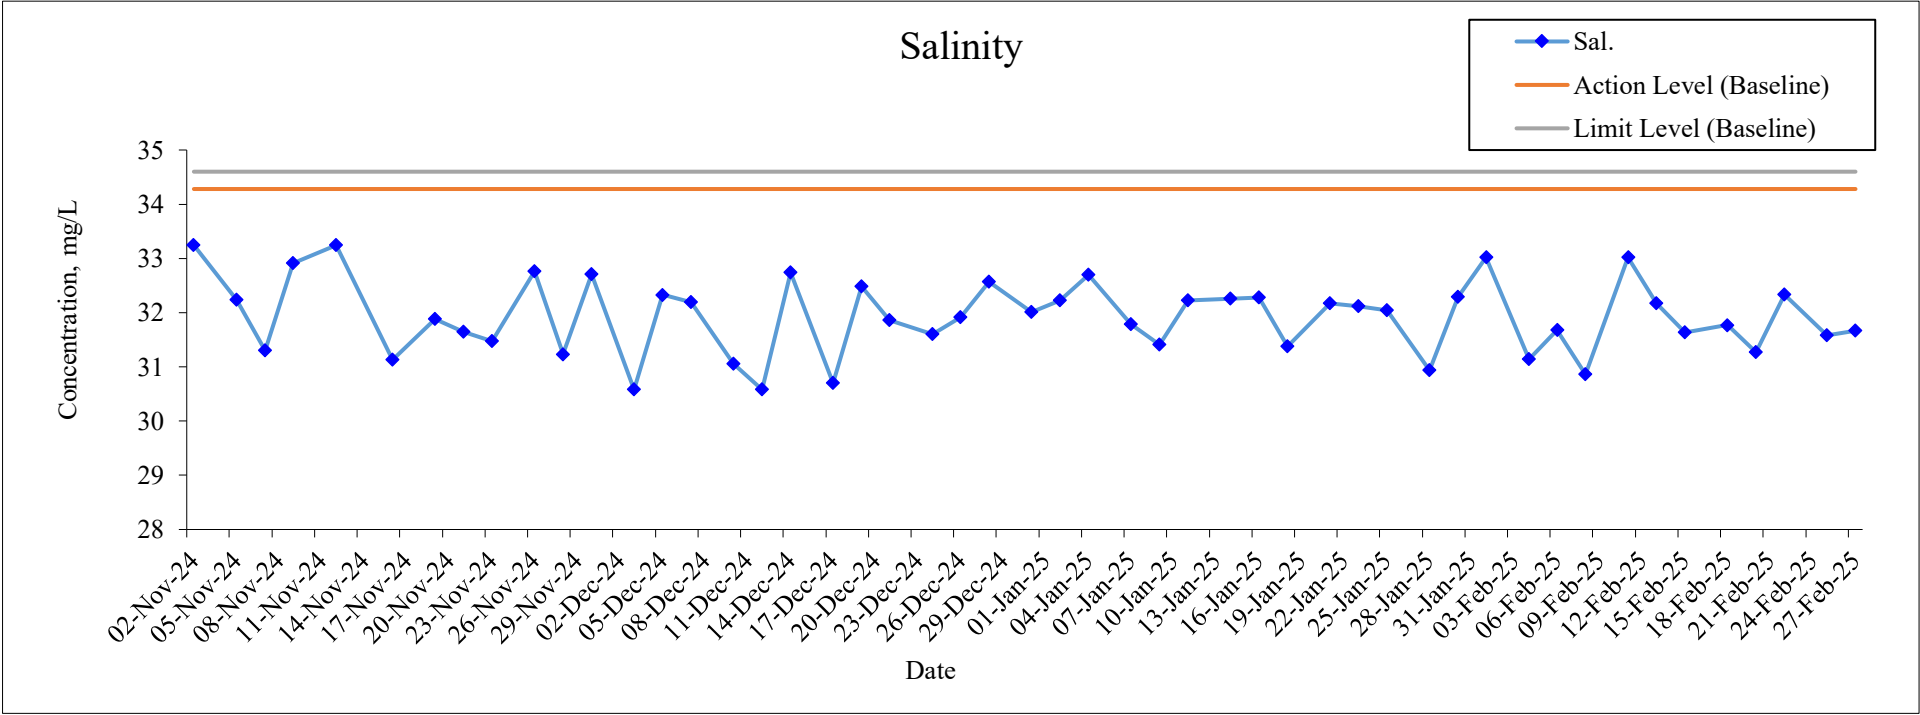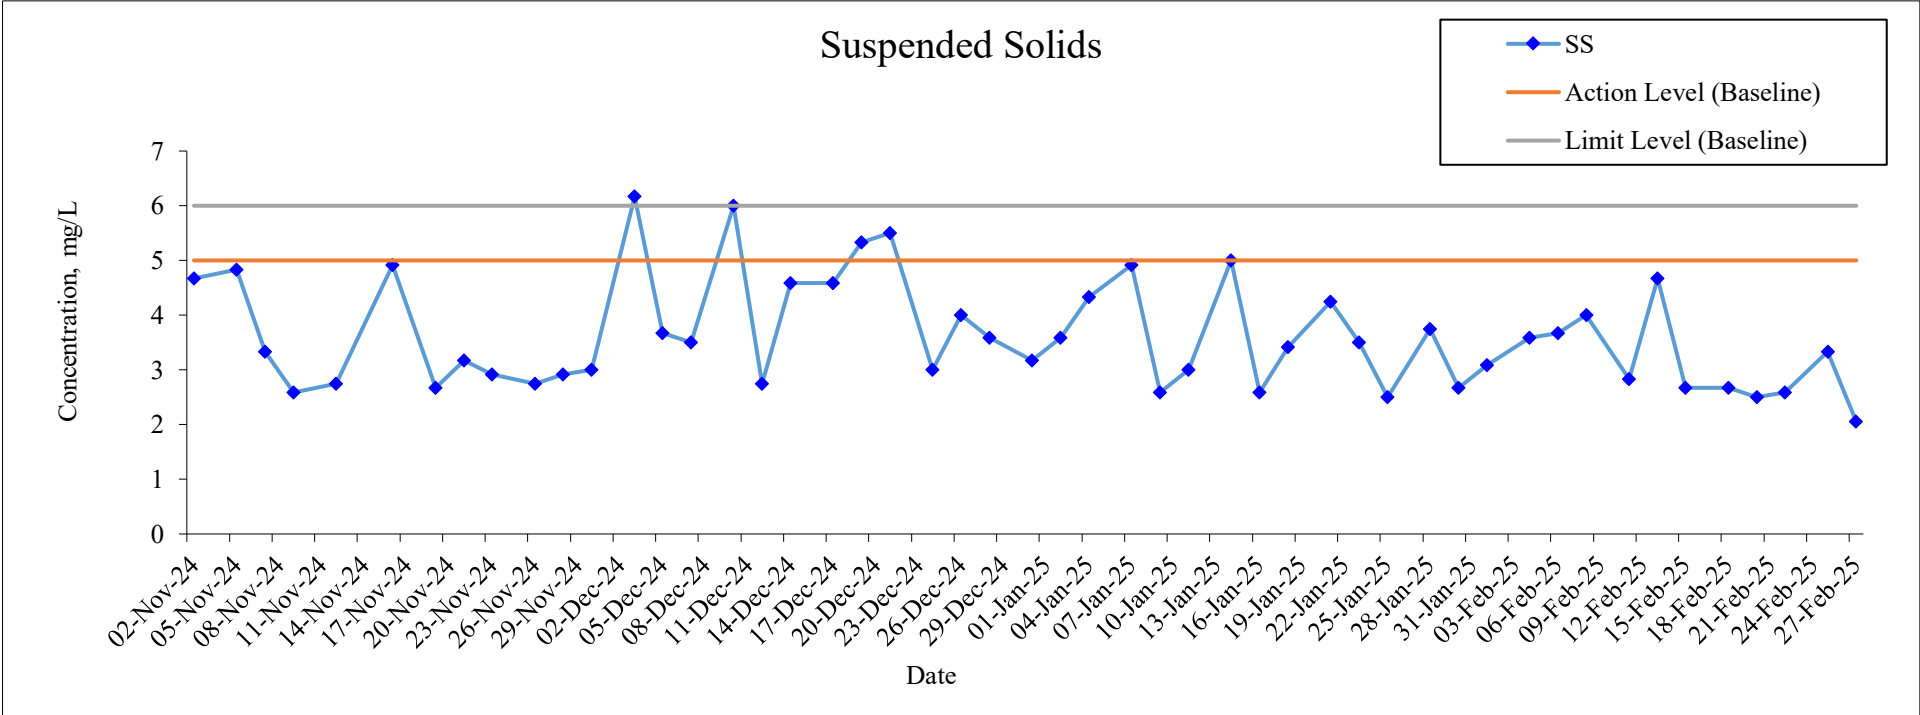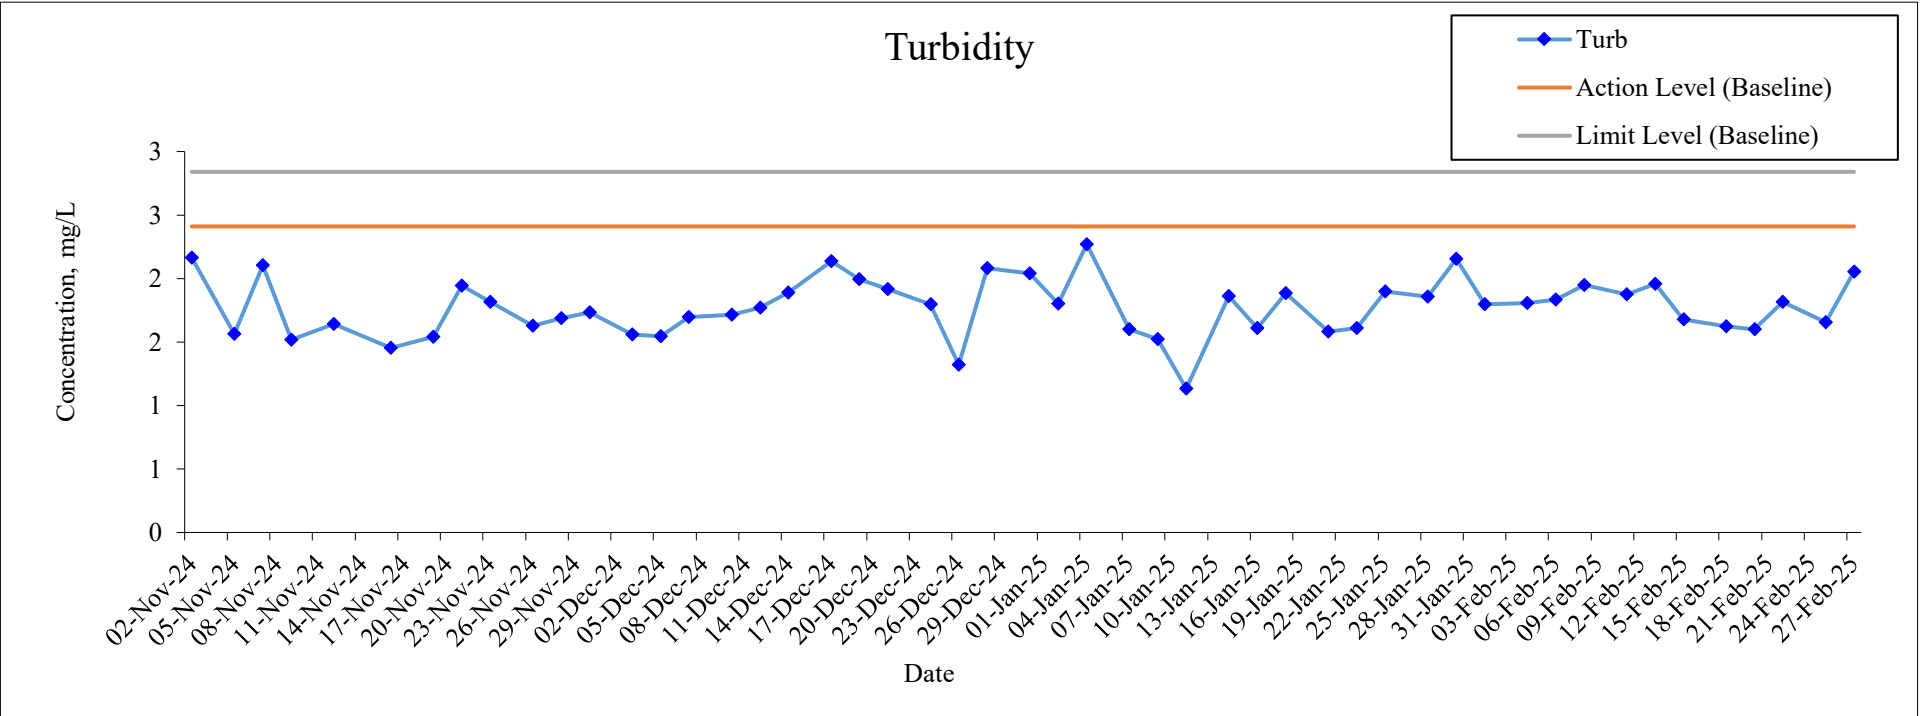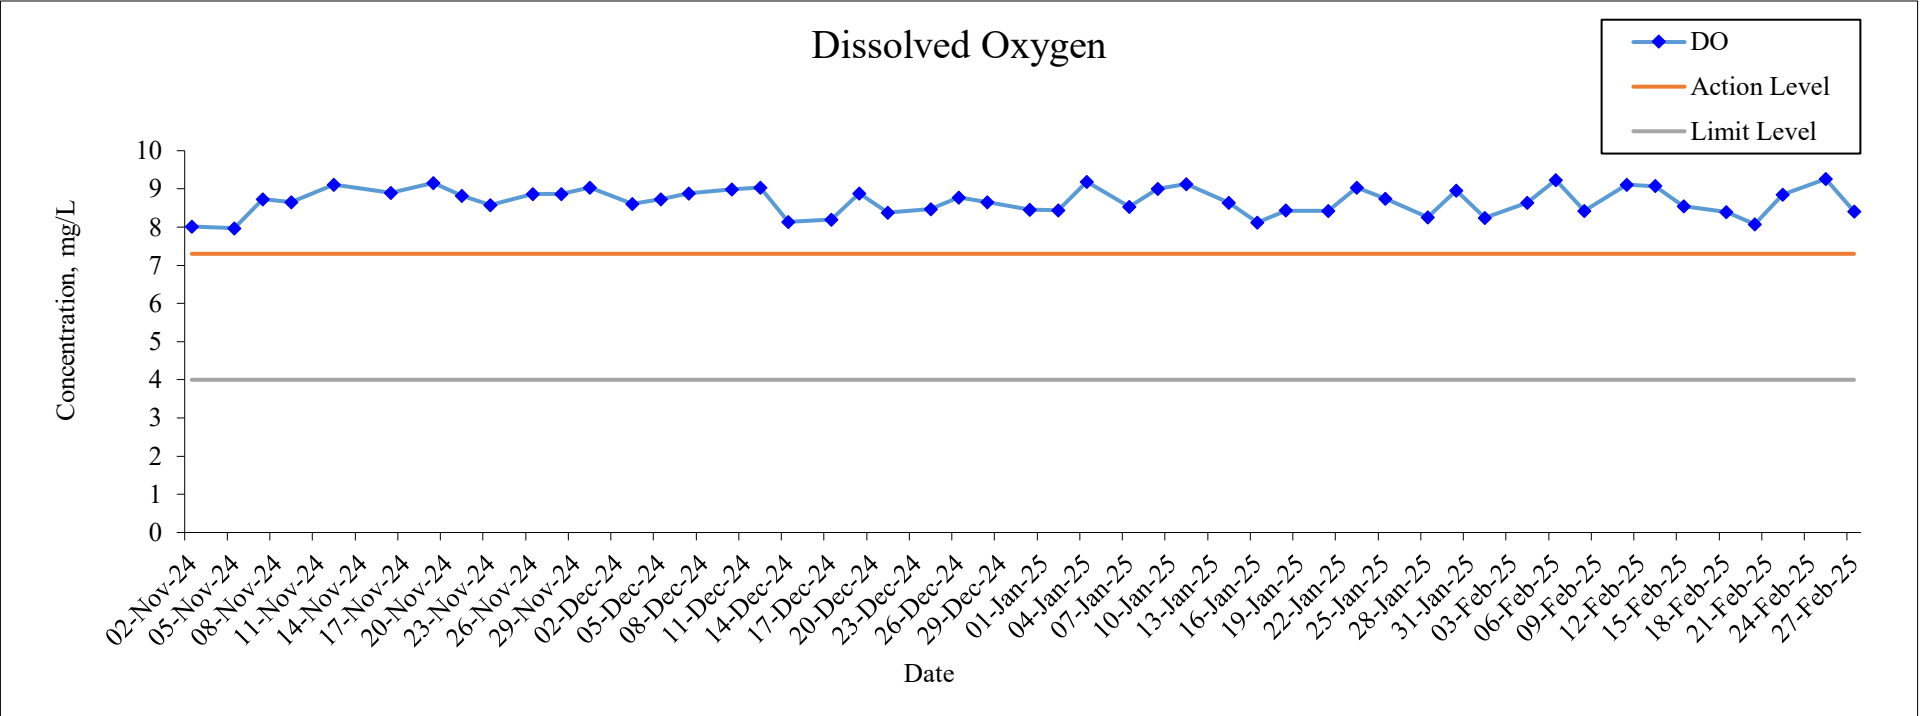

Monitoring Location: WSR2

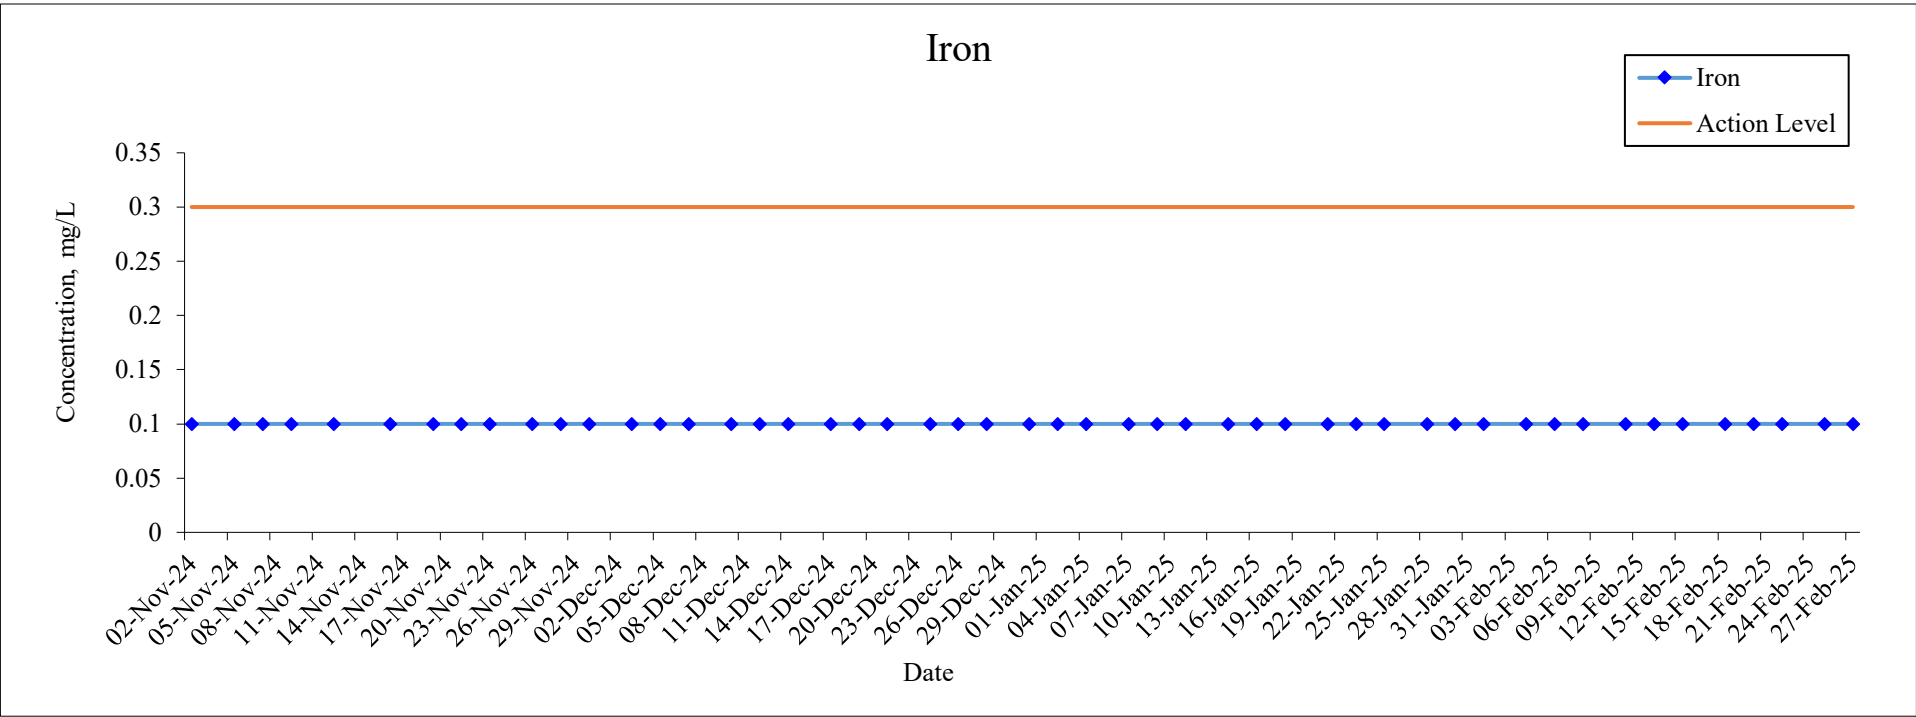


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

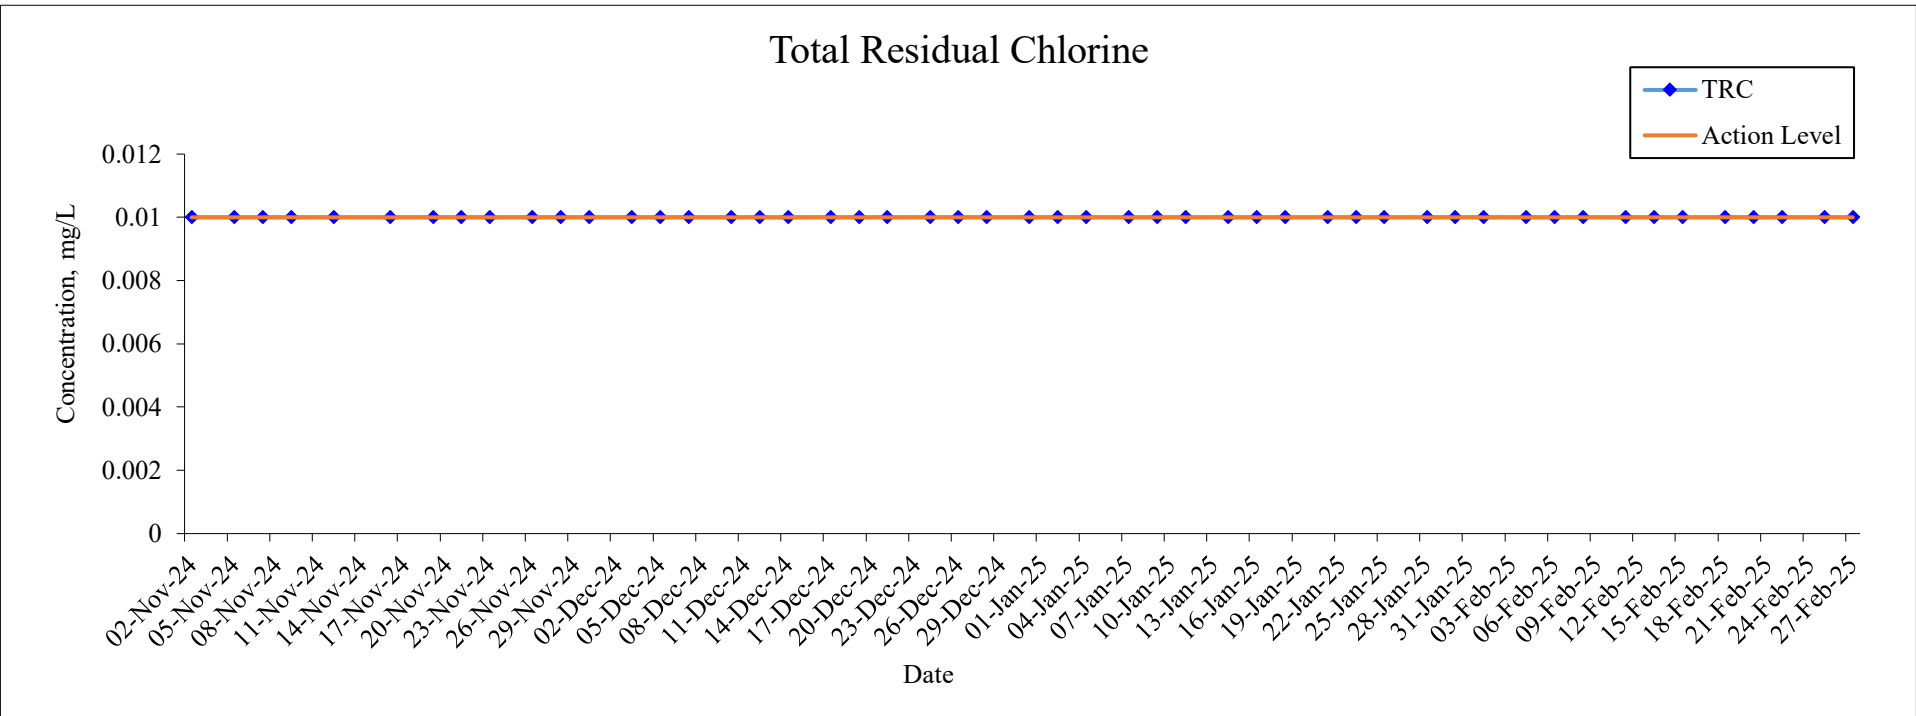


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR3

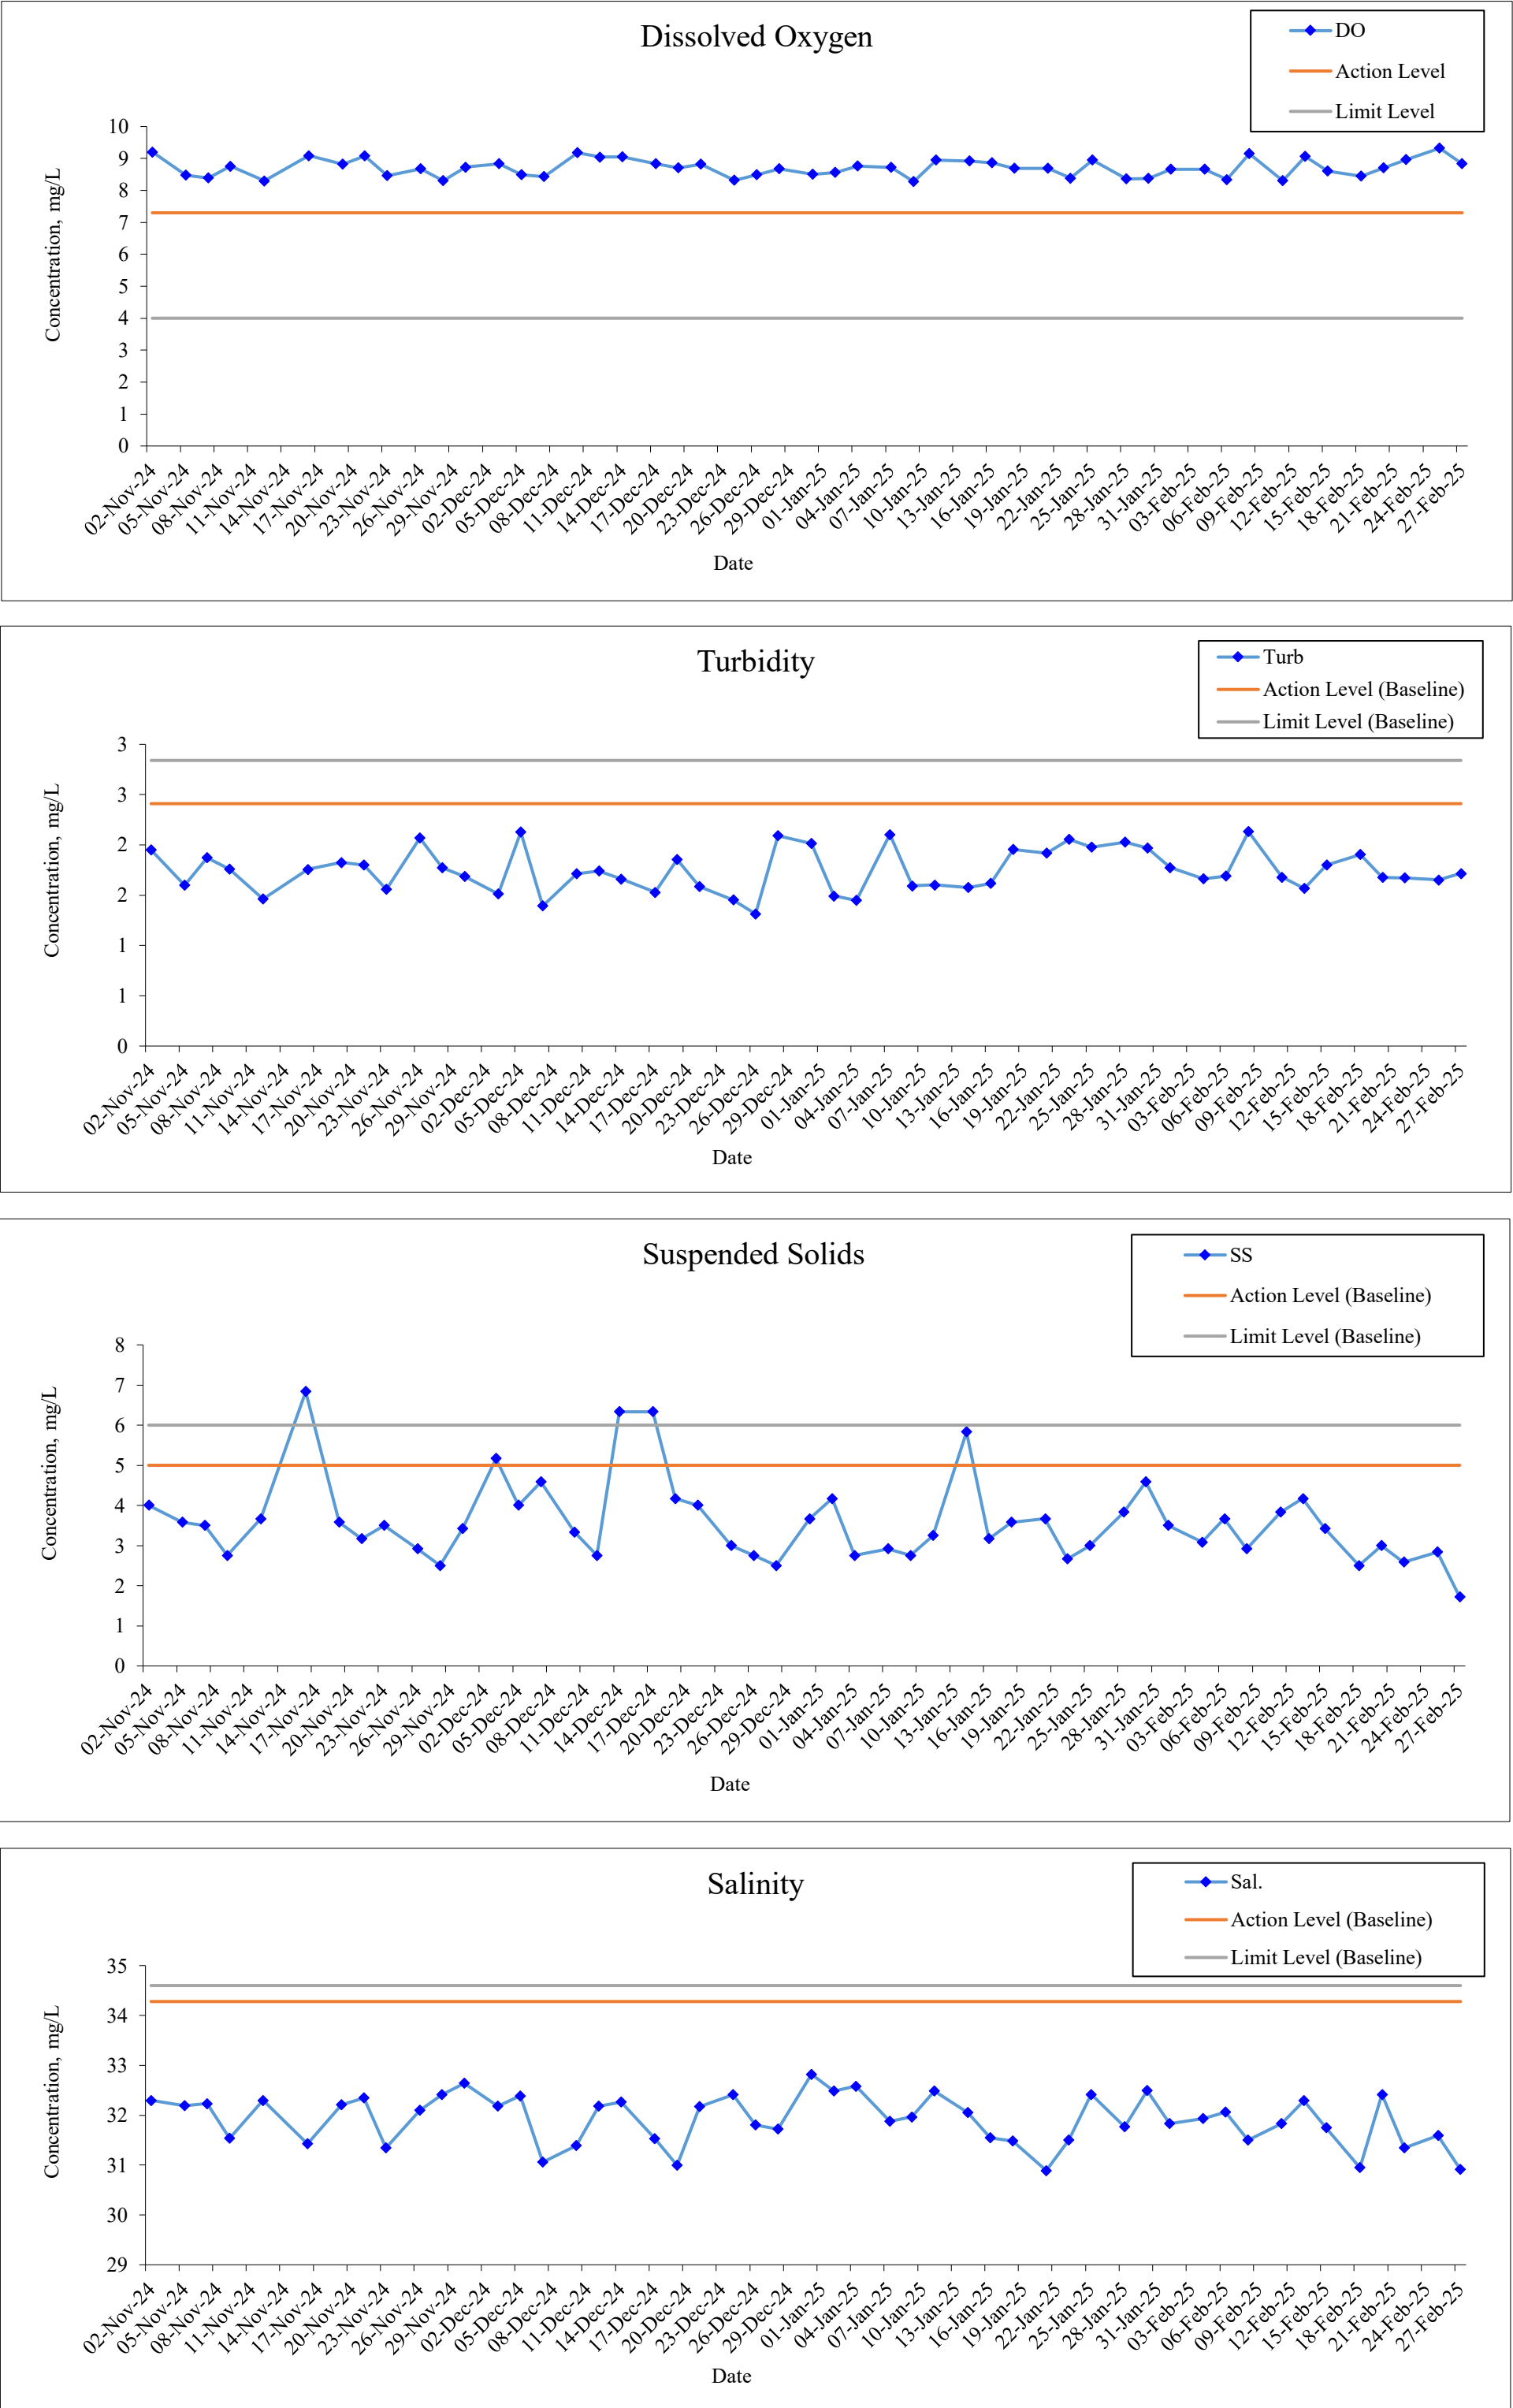

Monitoring Location: WSR3




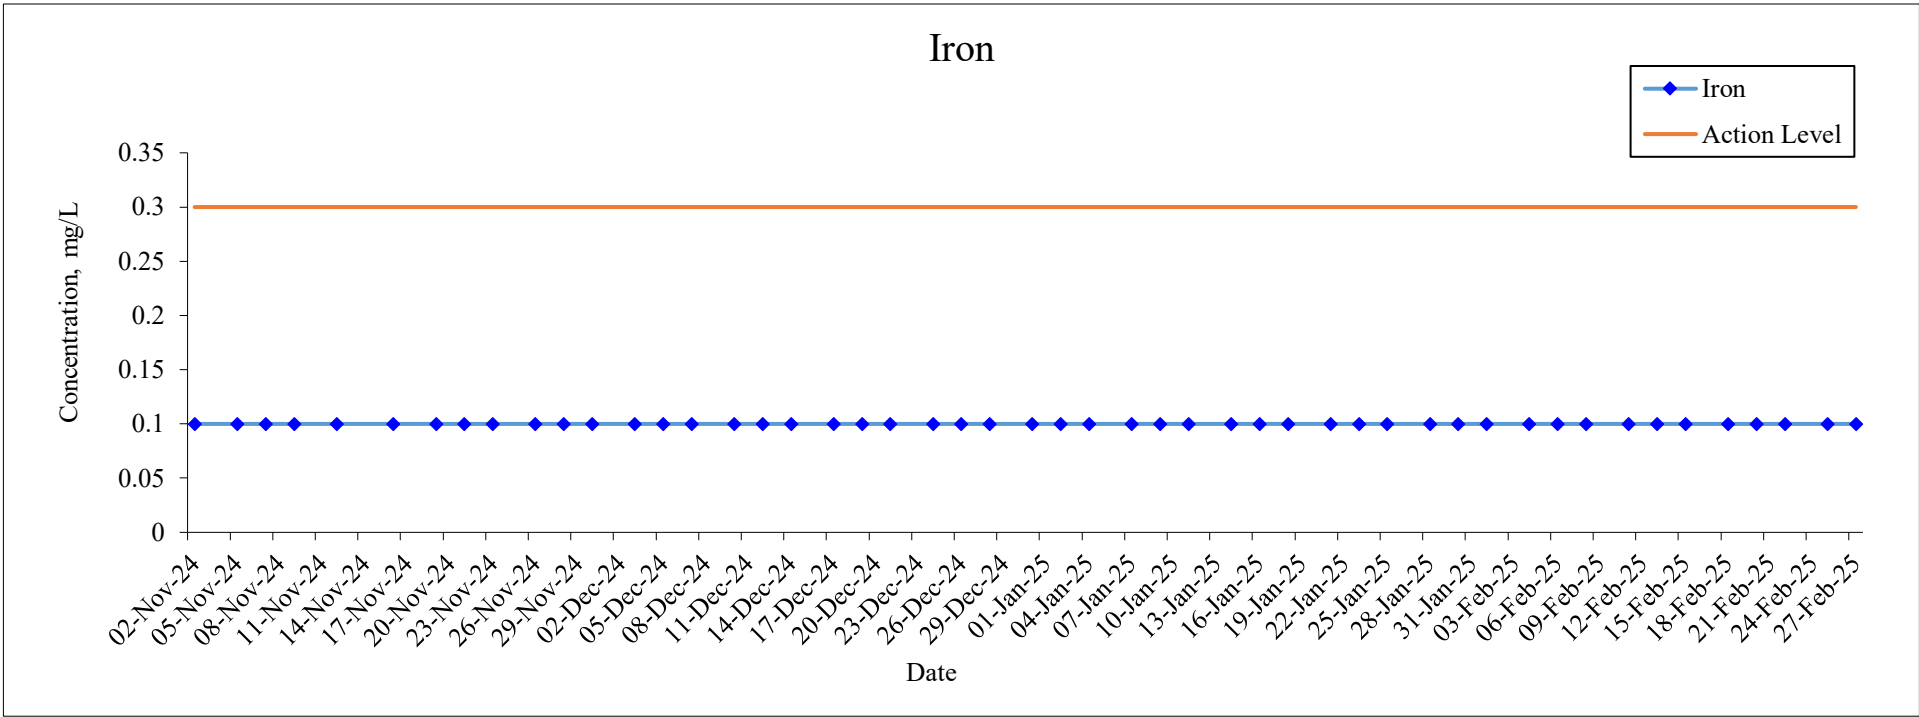


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

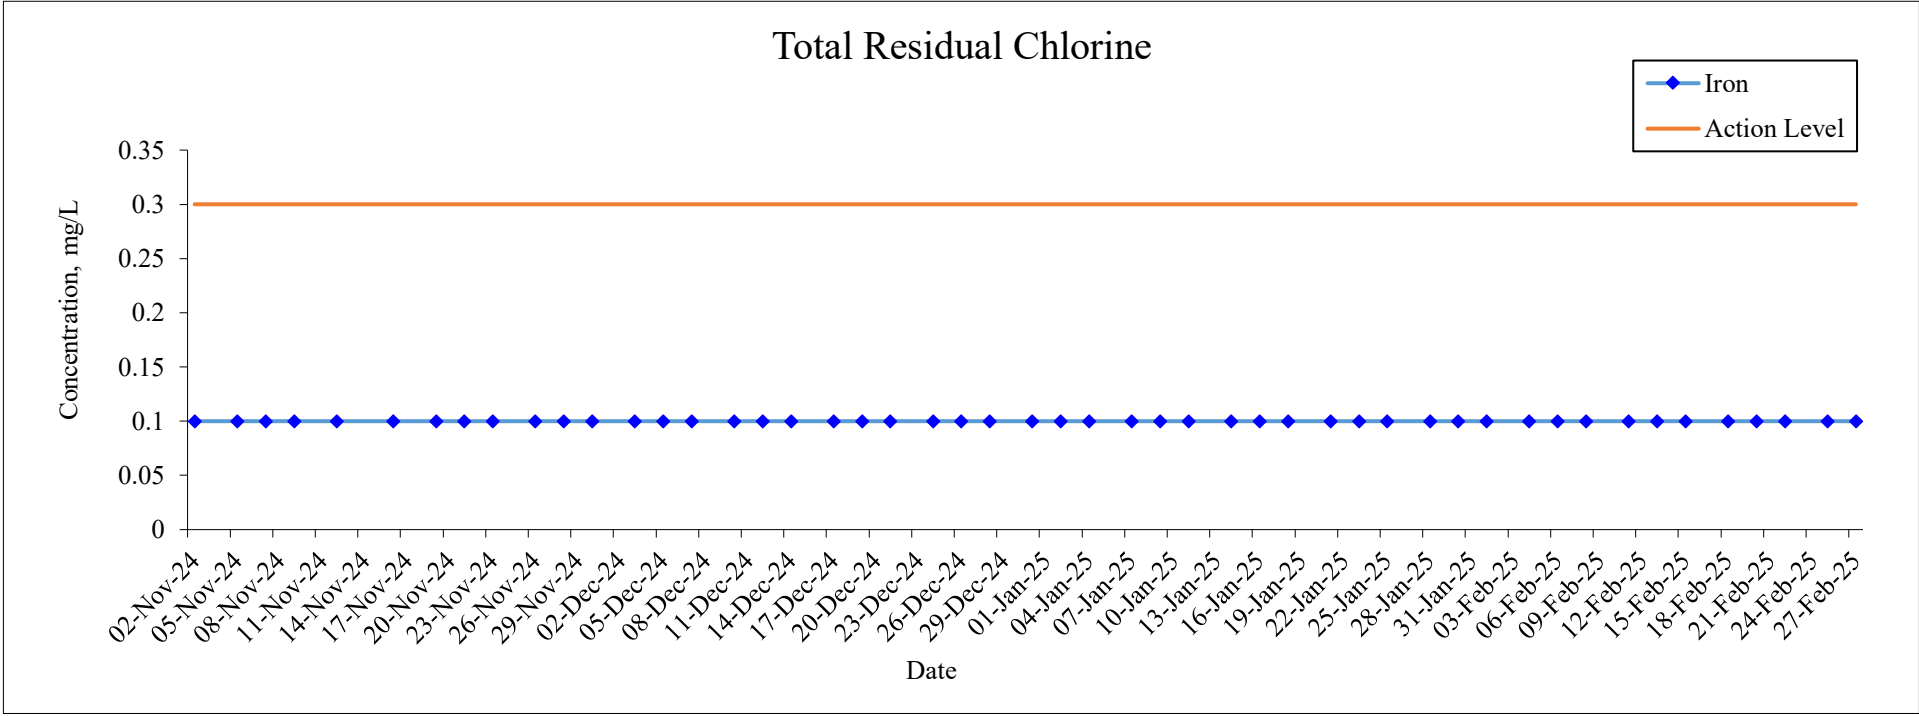


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR4

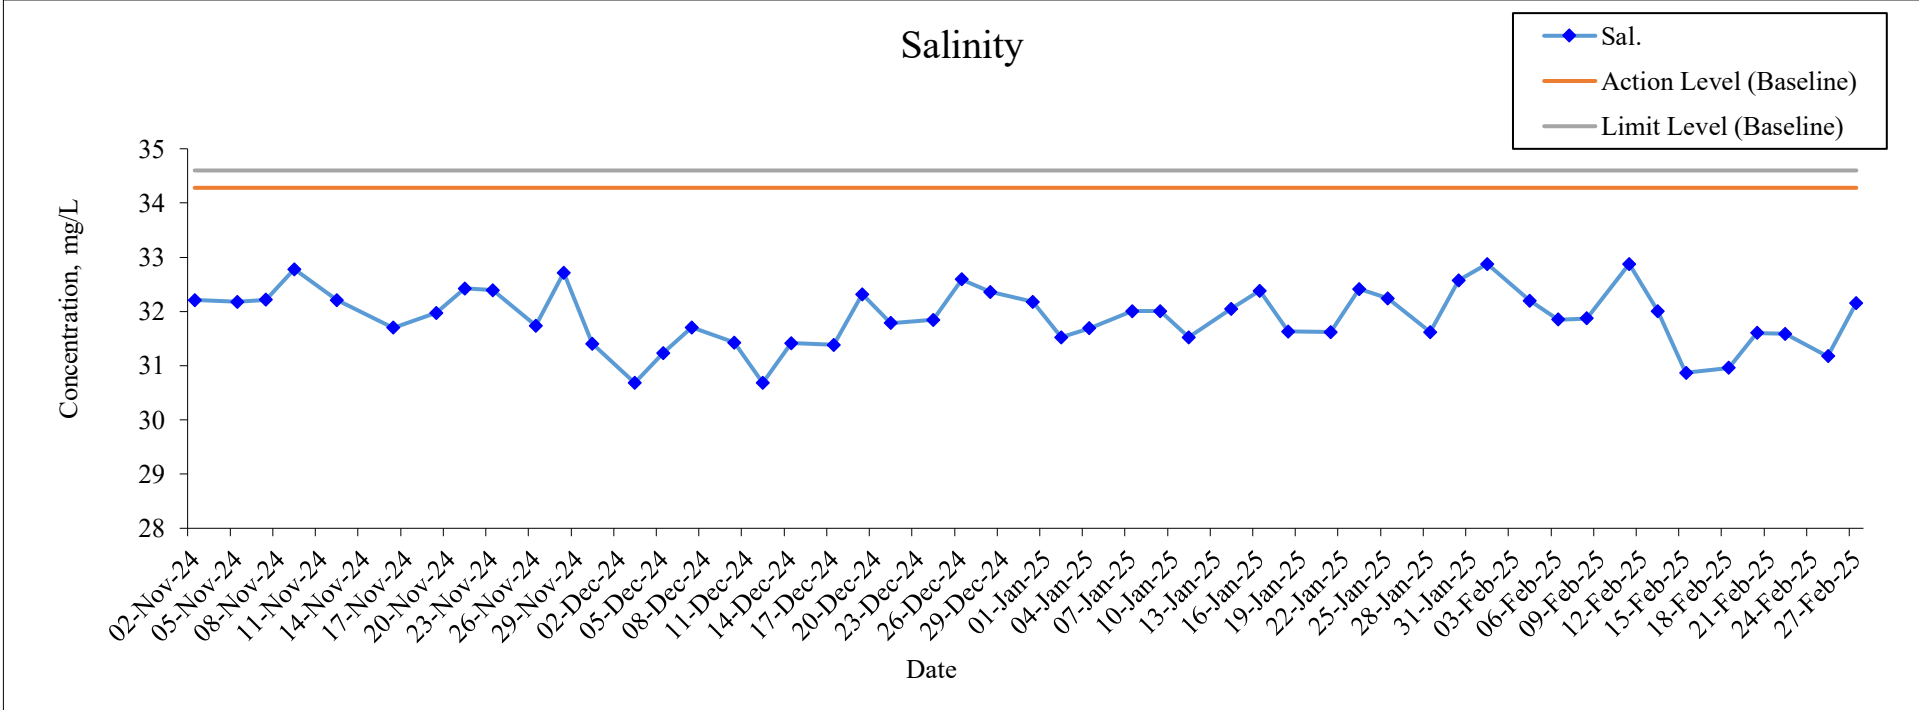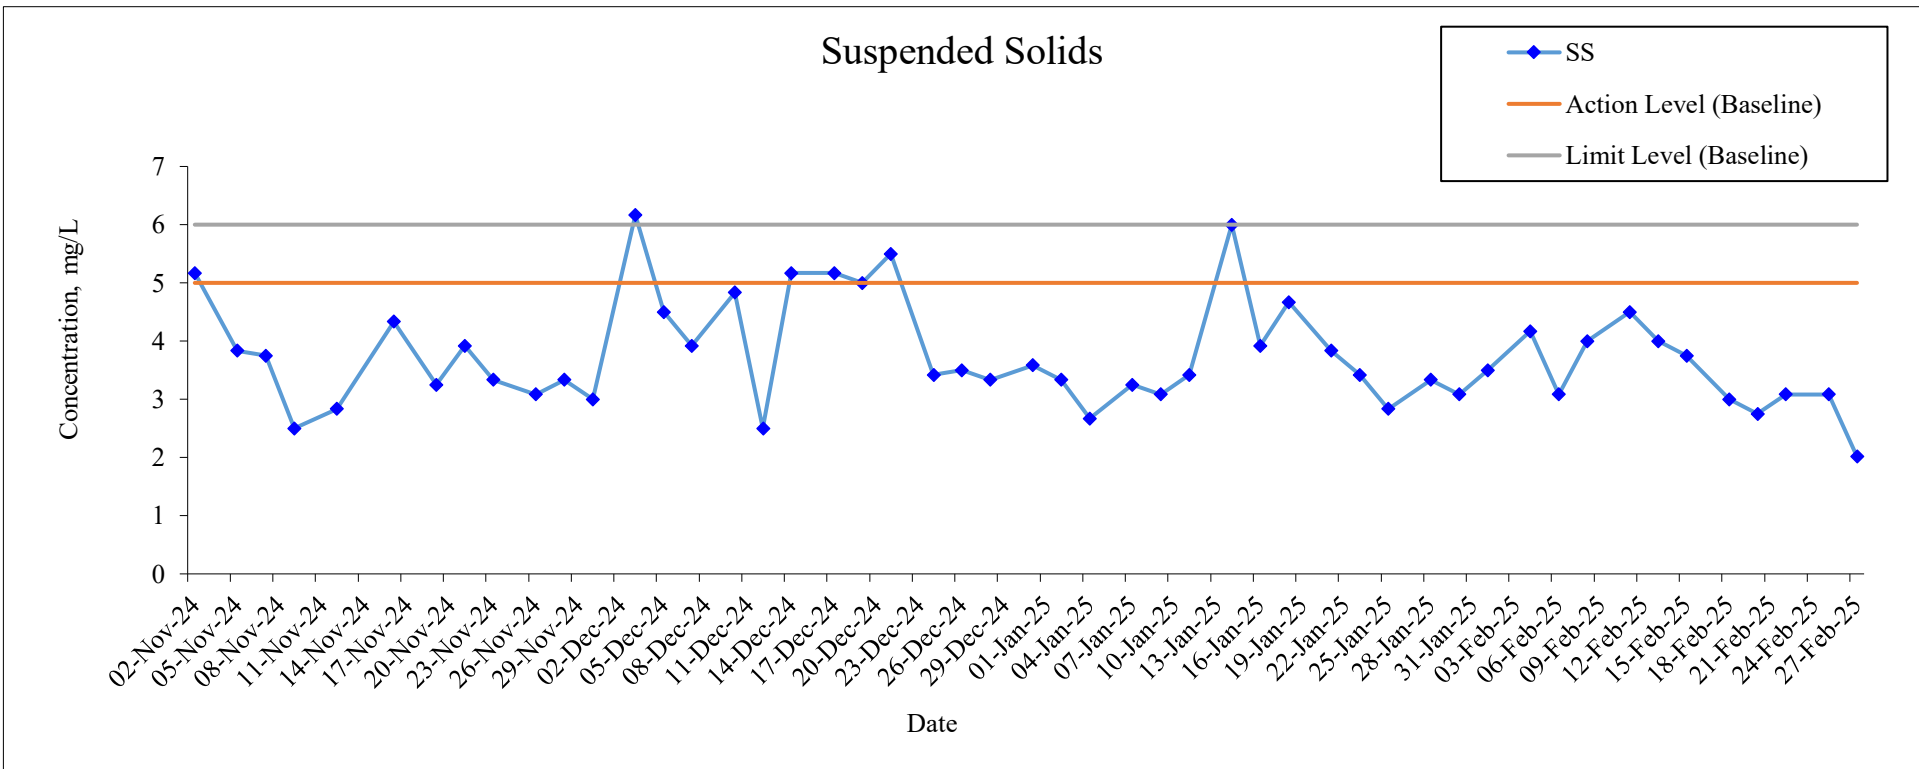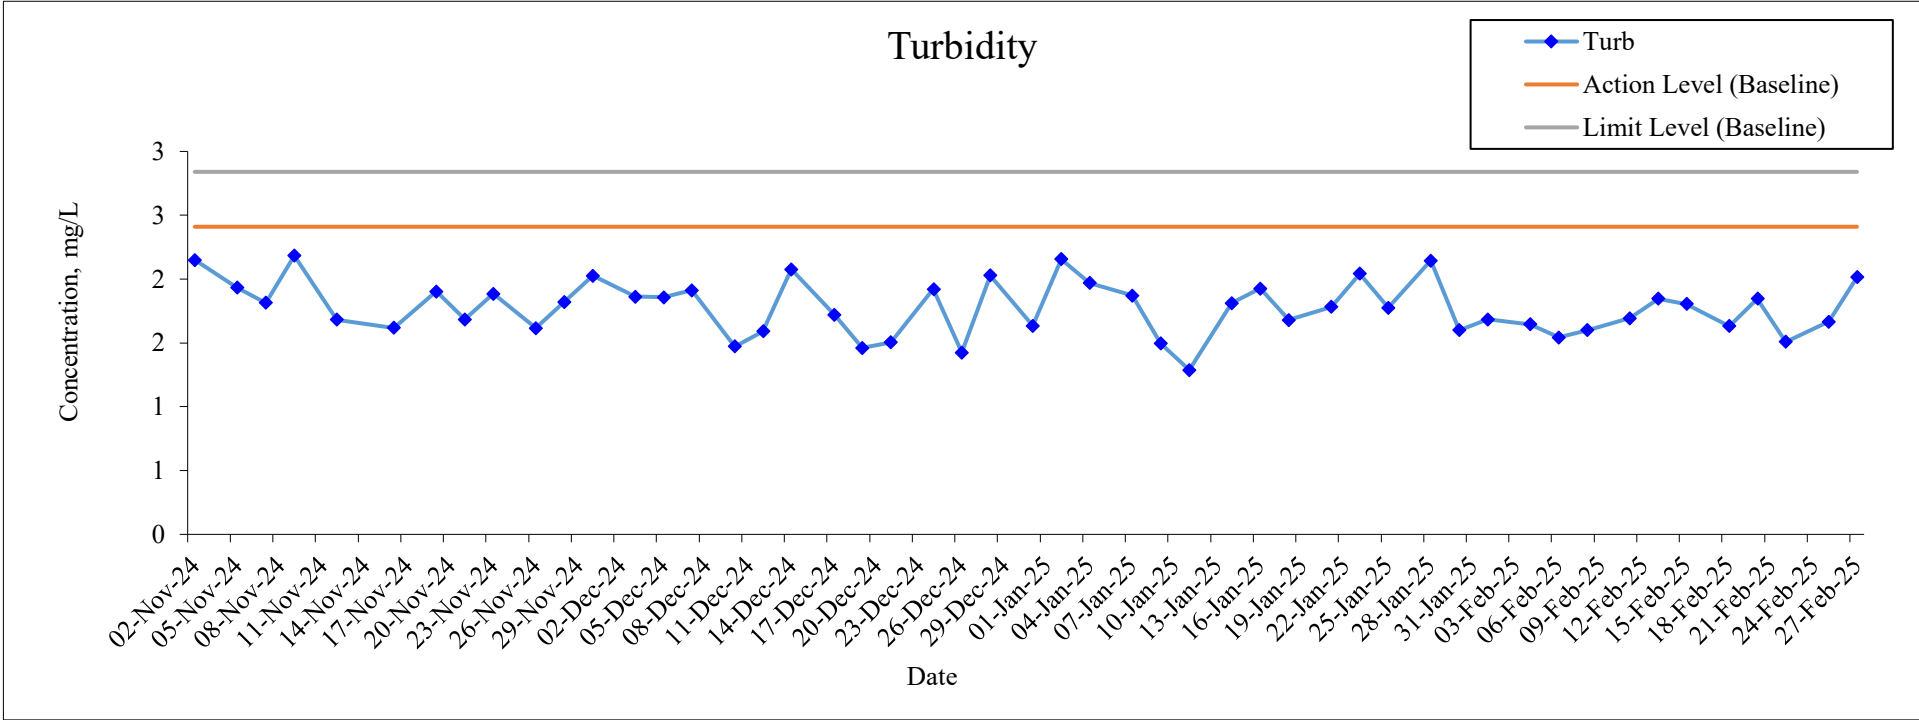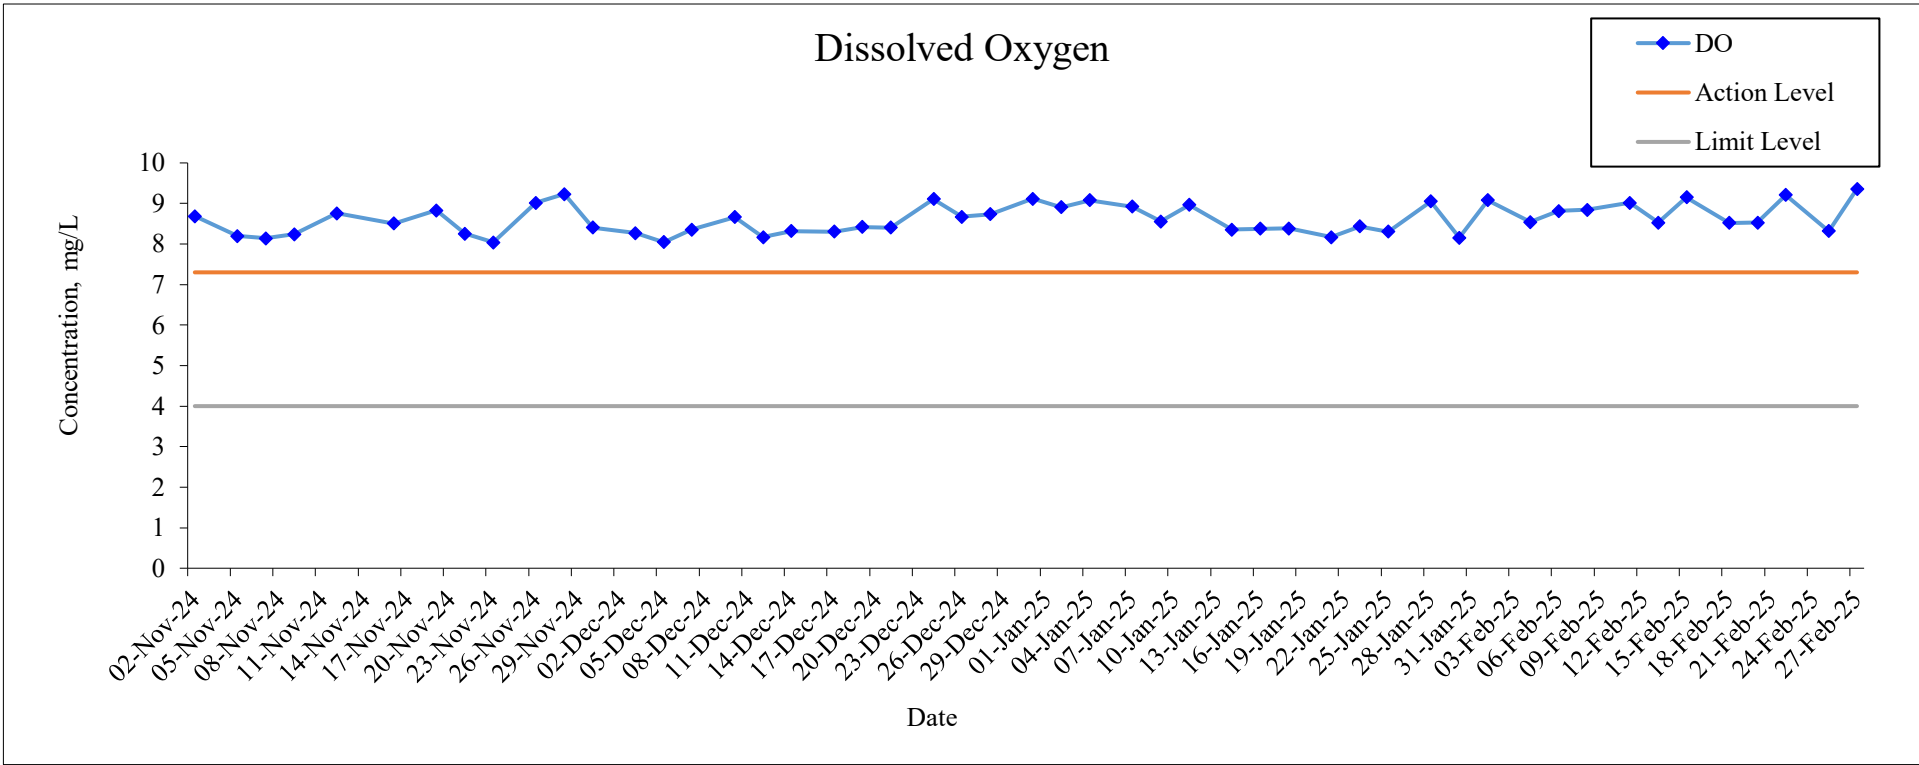

Monitoring Location: WSR4




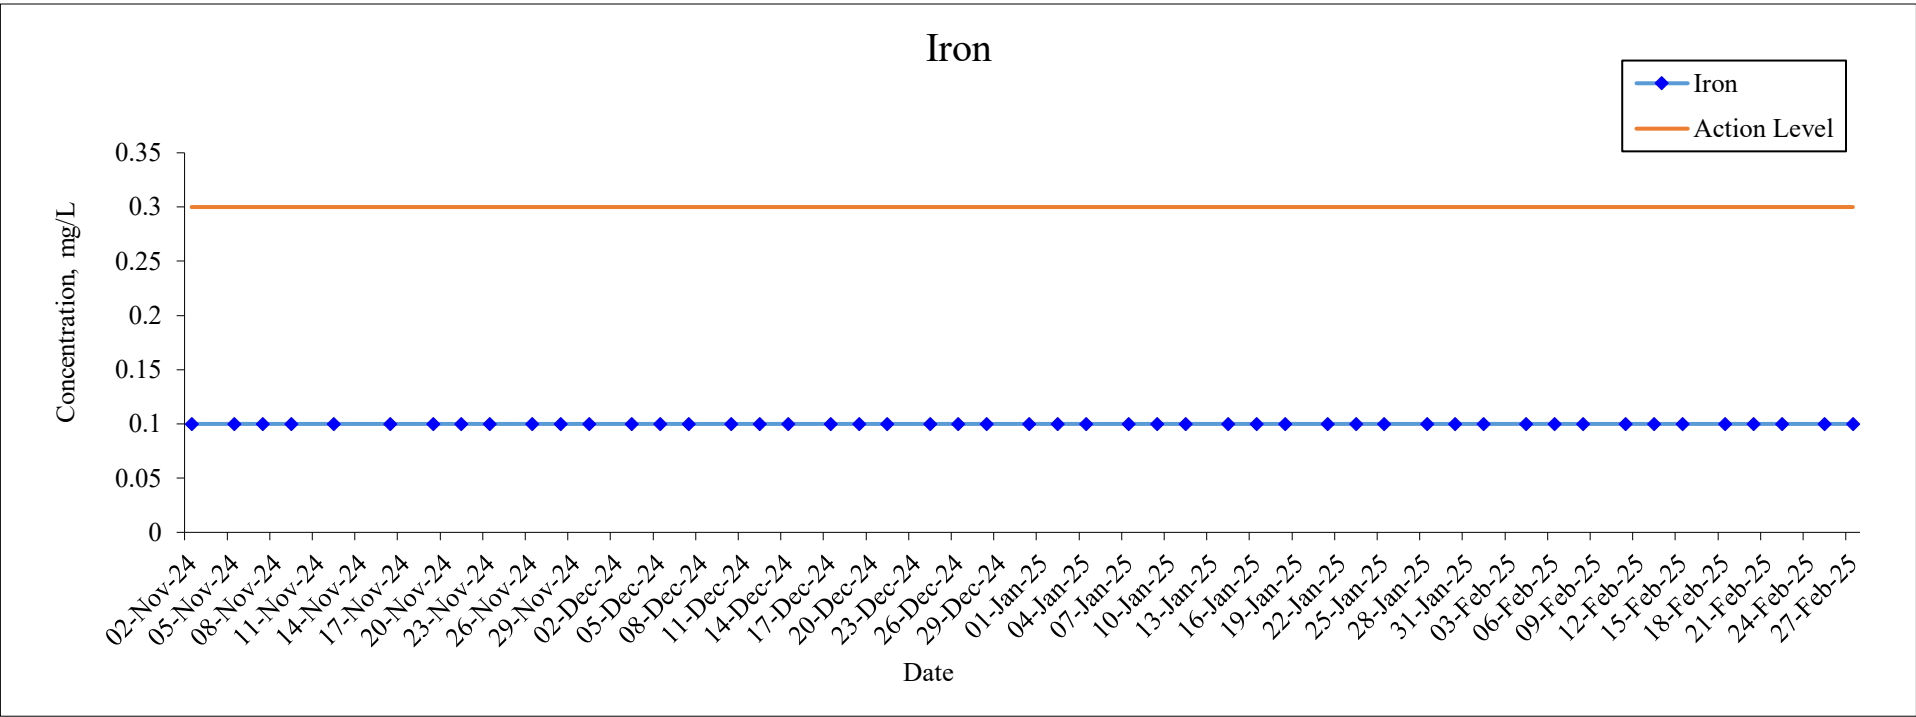


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

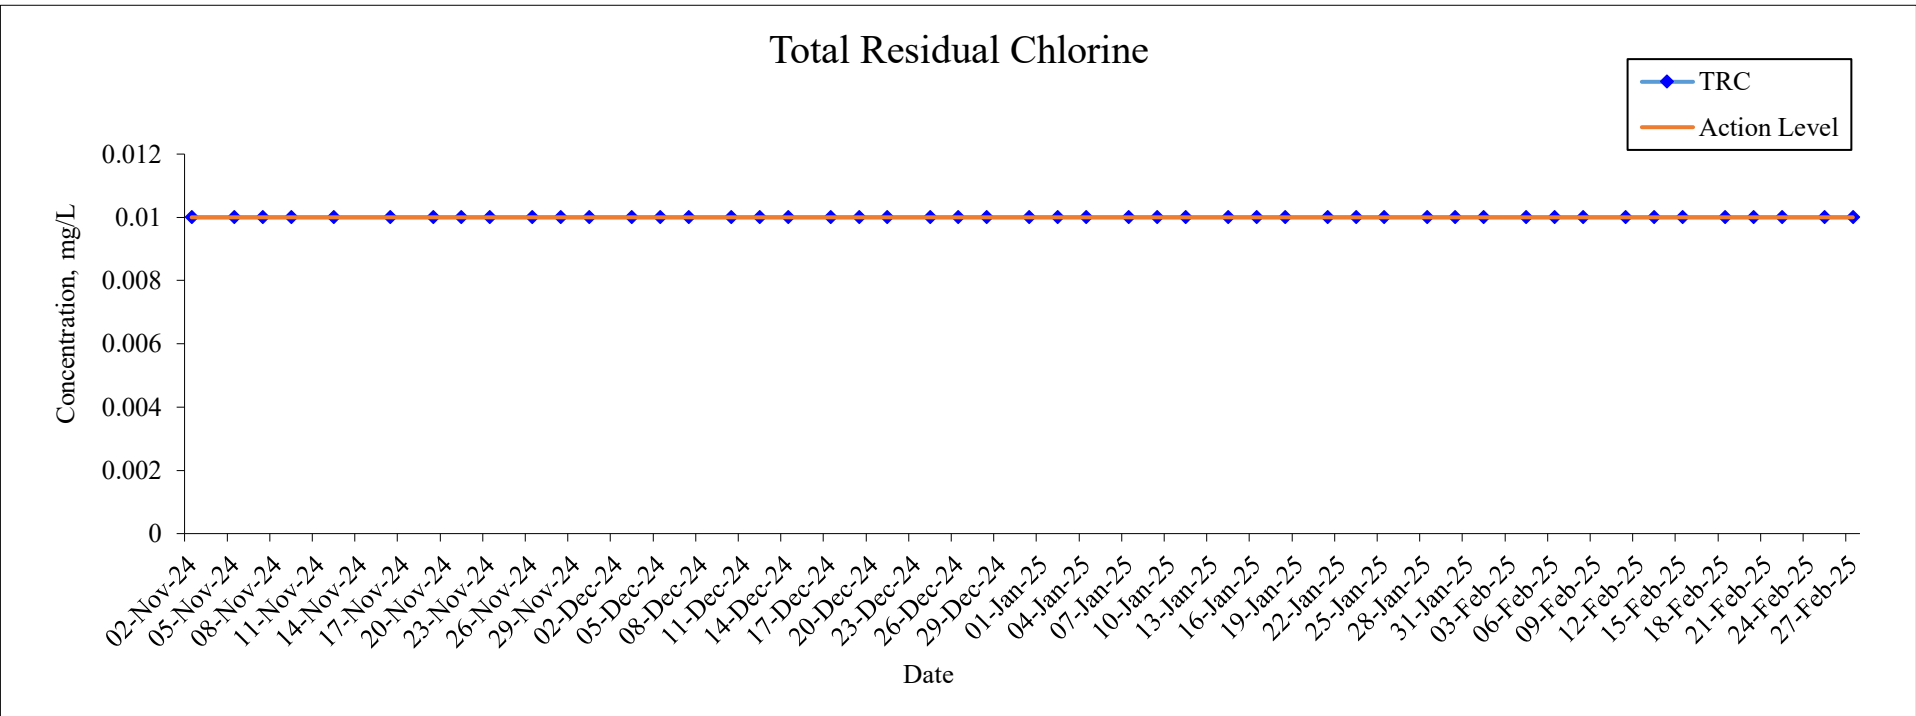


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR16

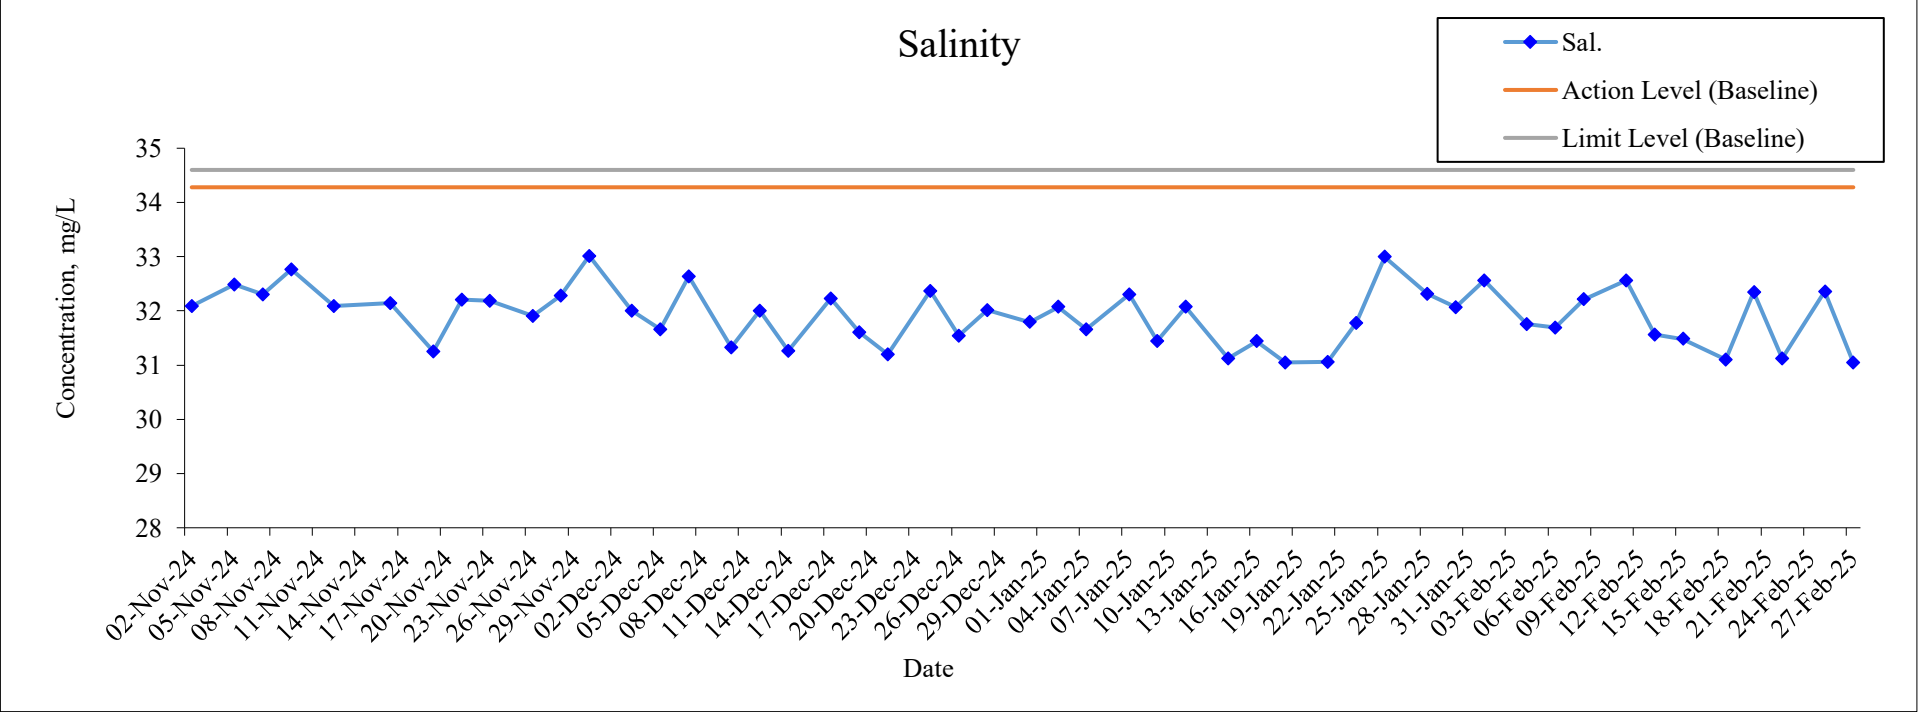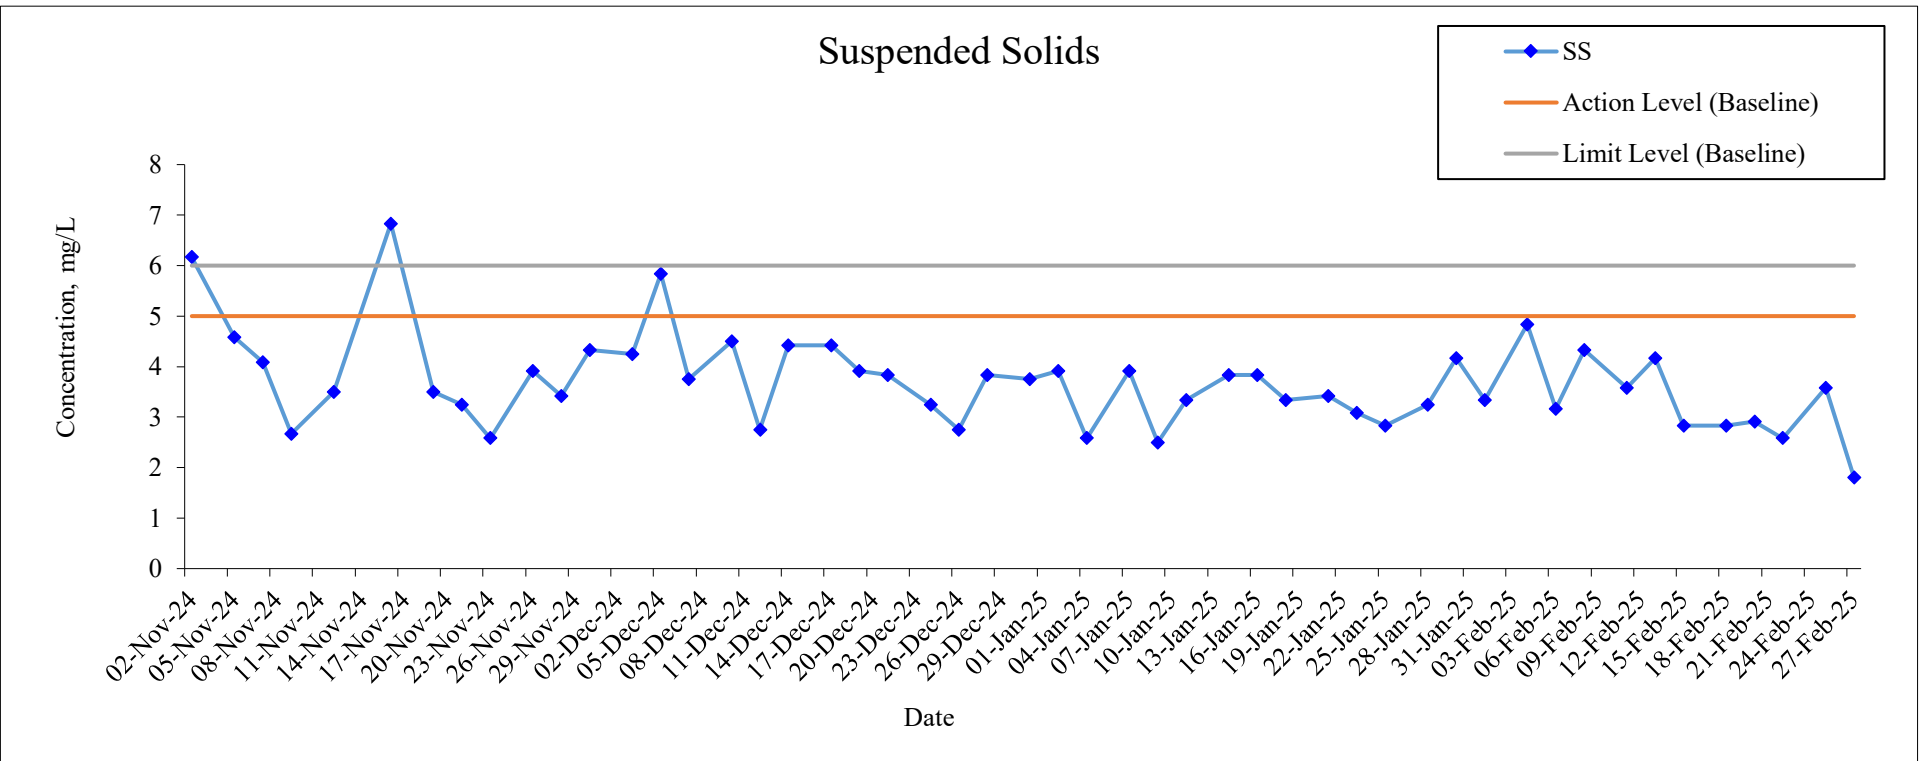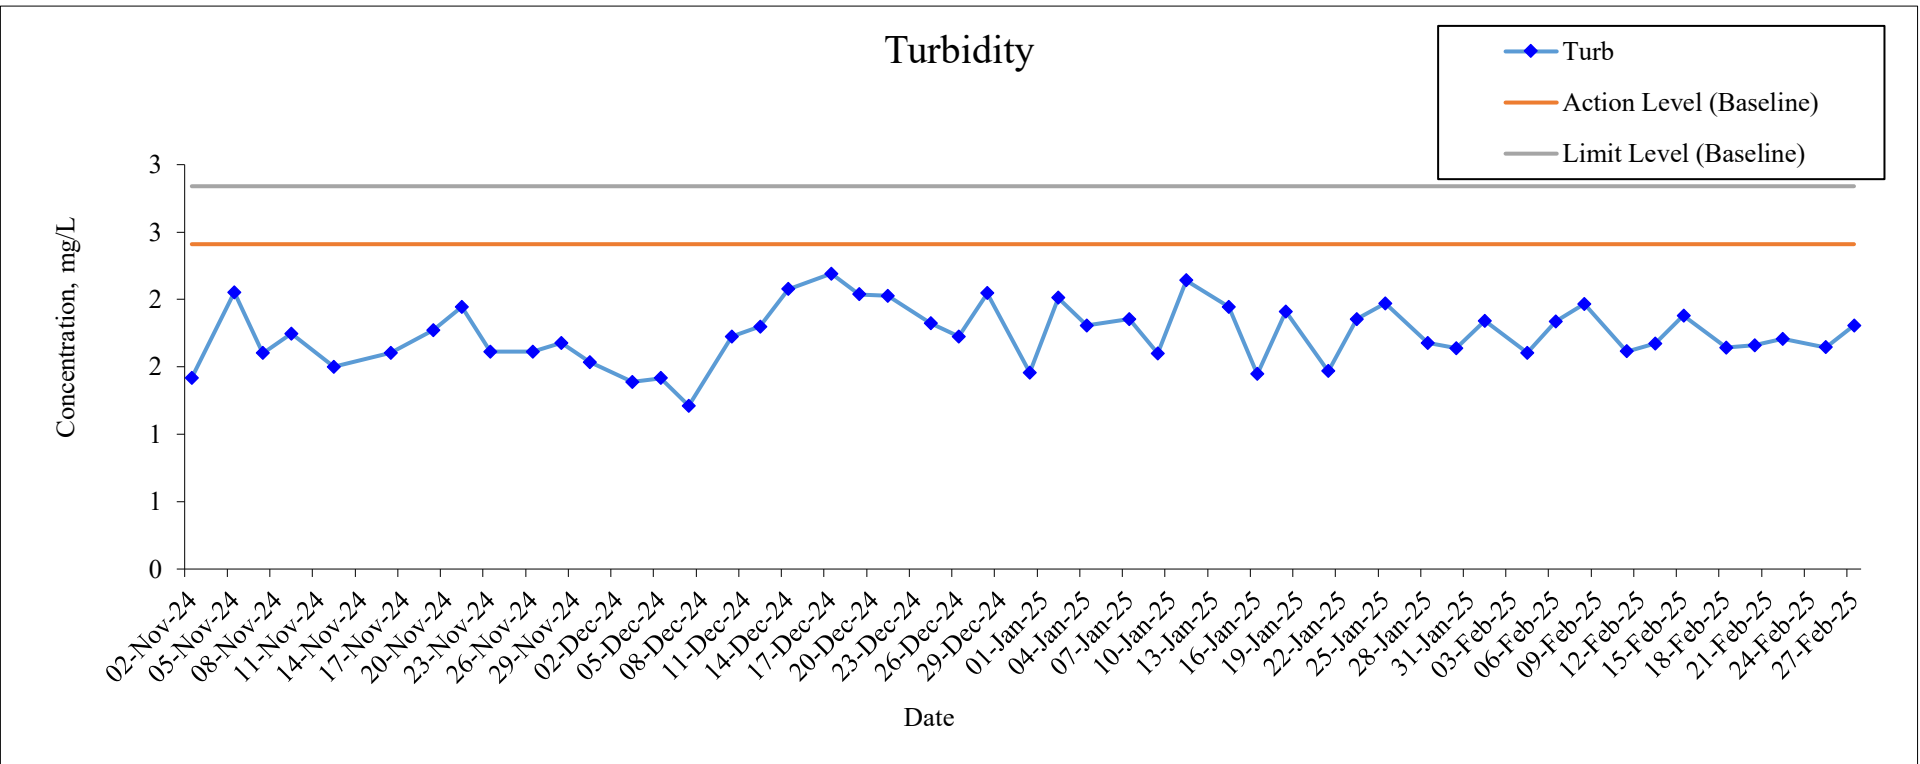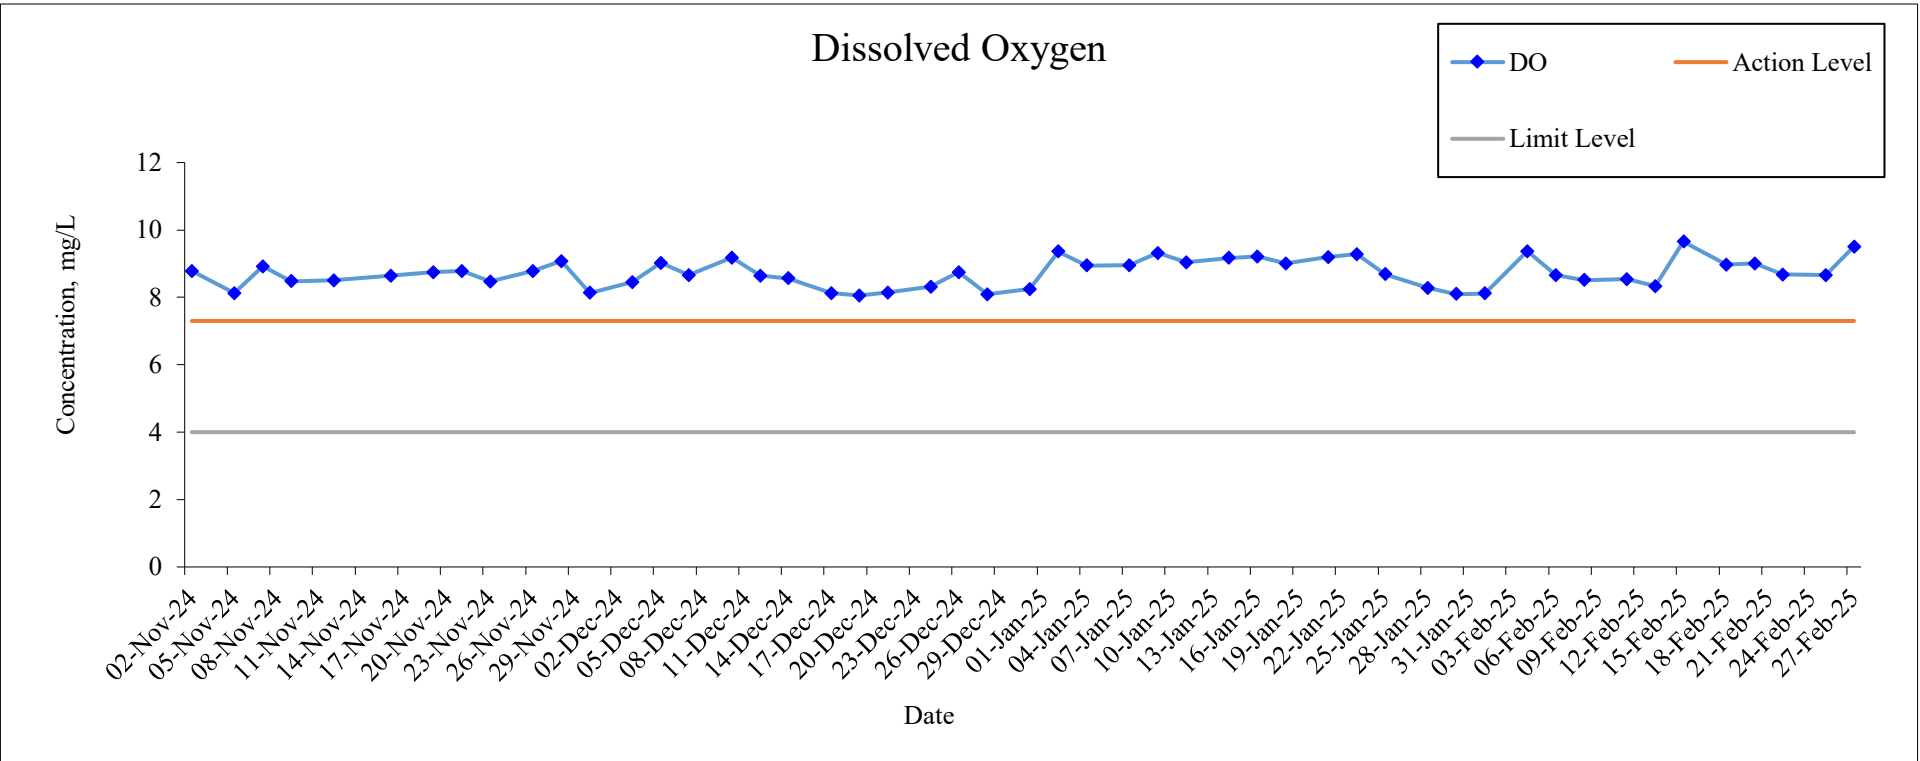

Monitoring Location: WSR16




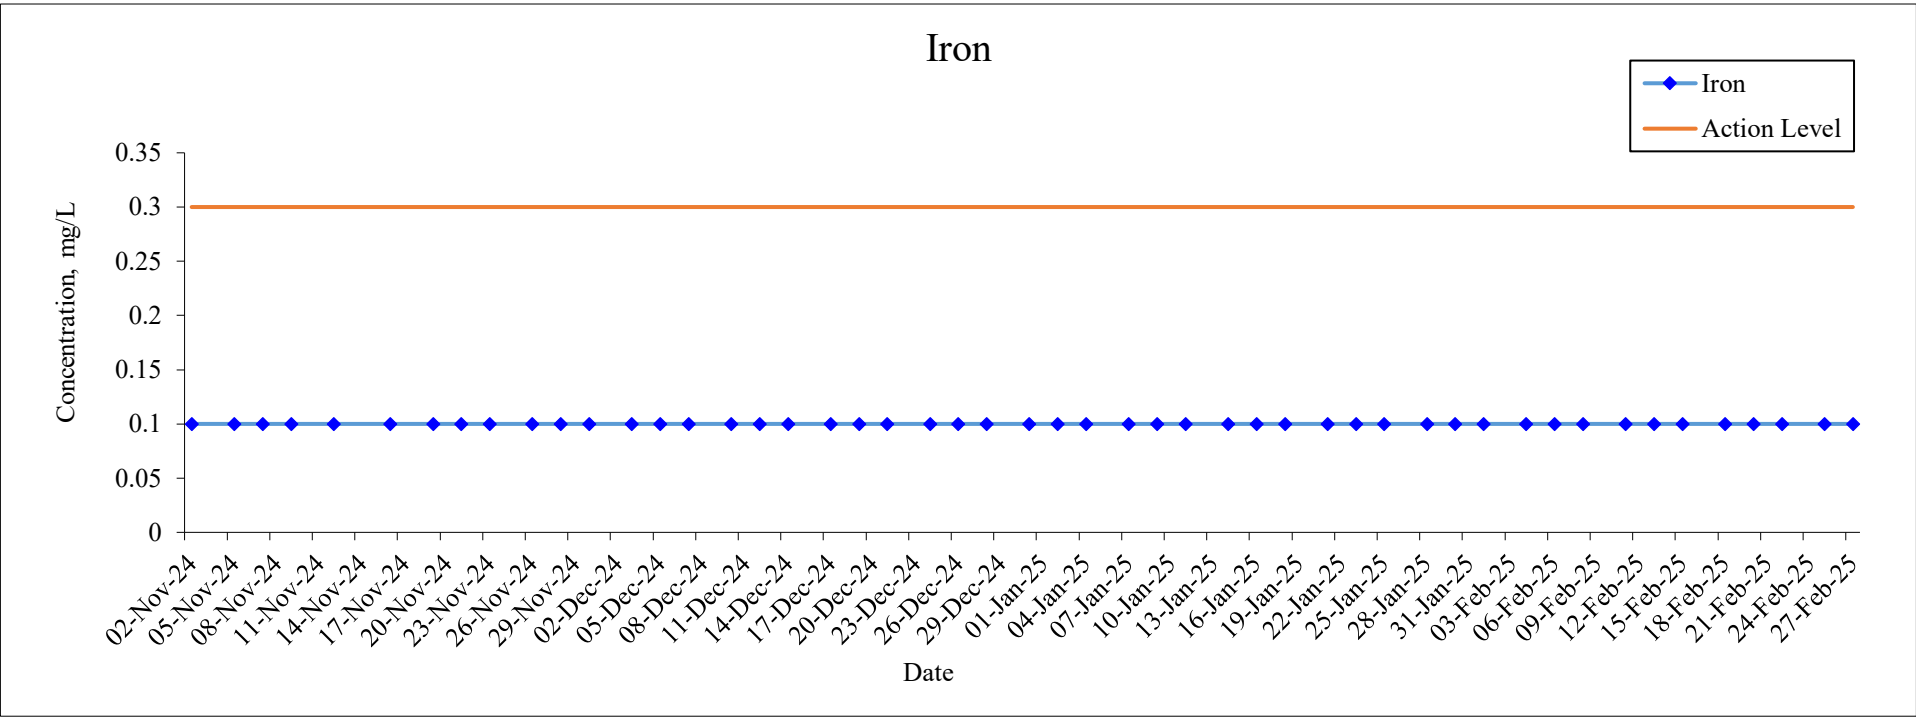


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

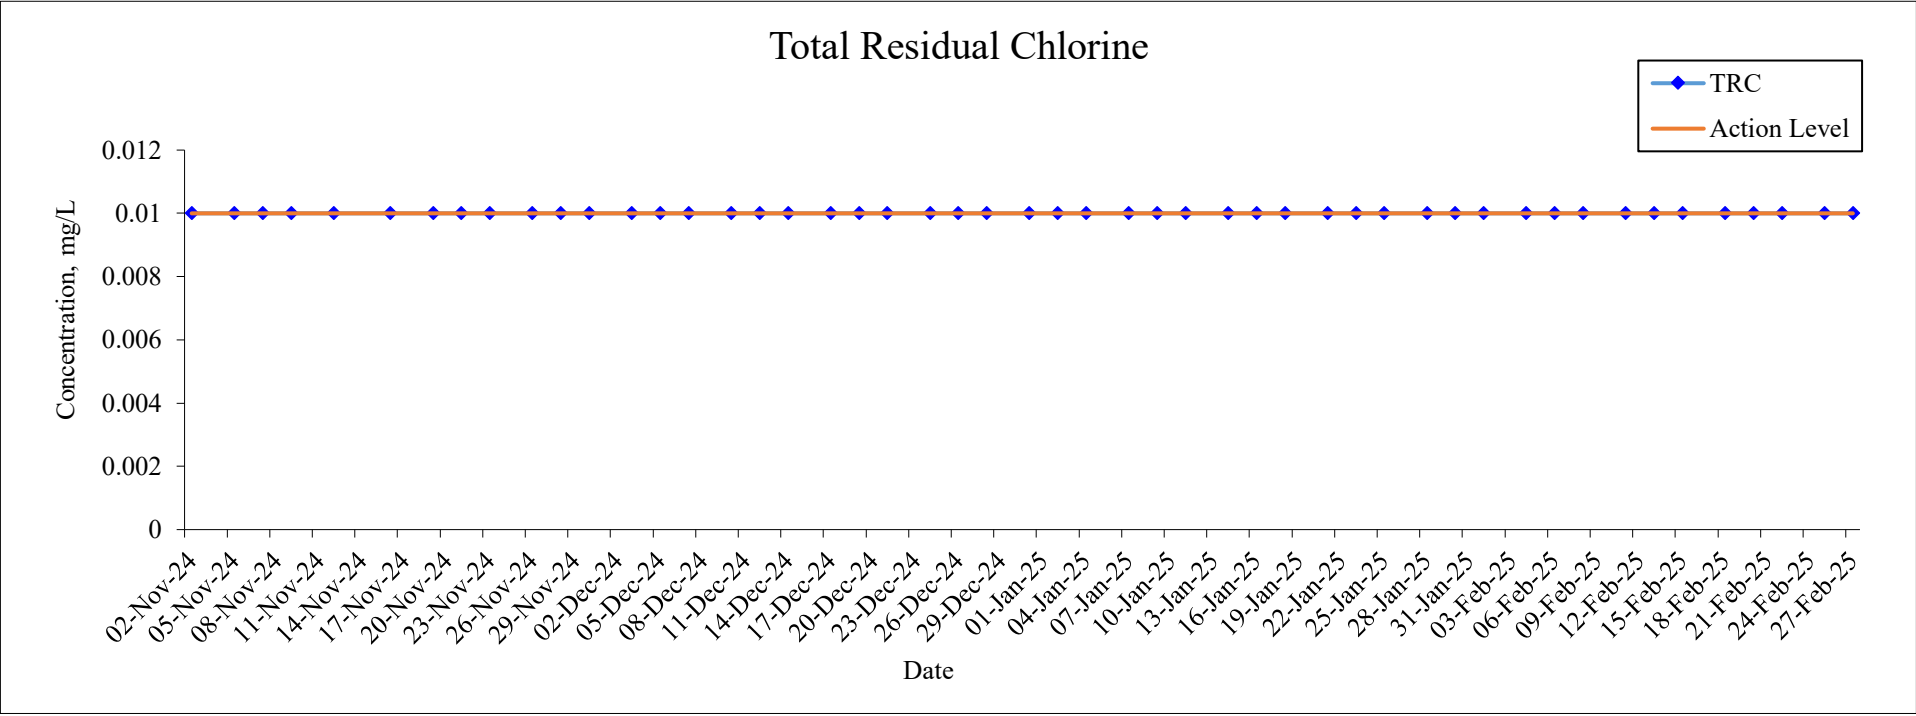


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR33

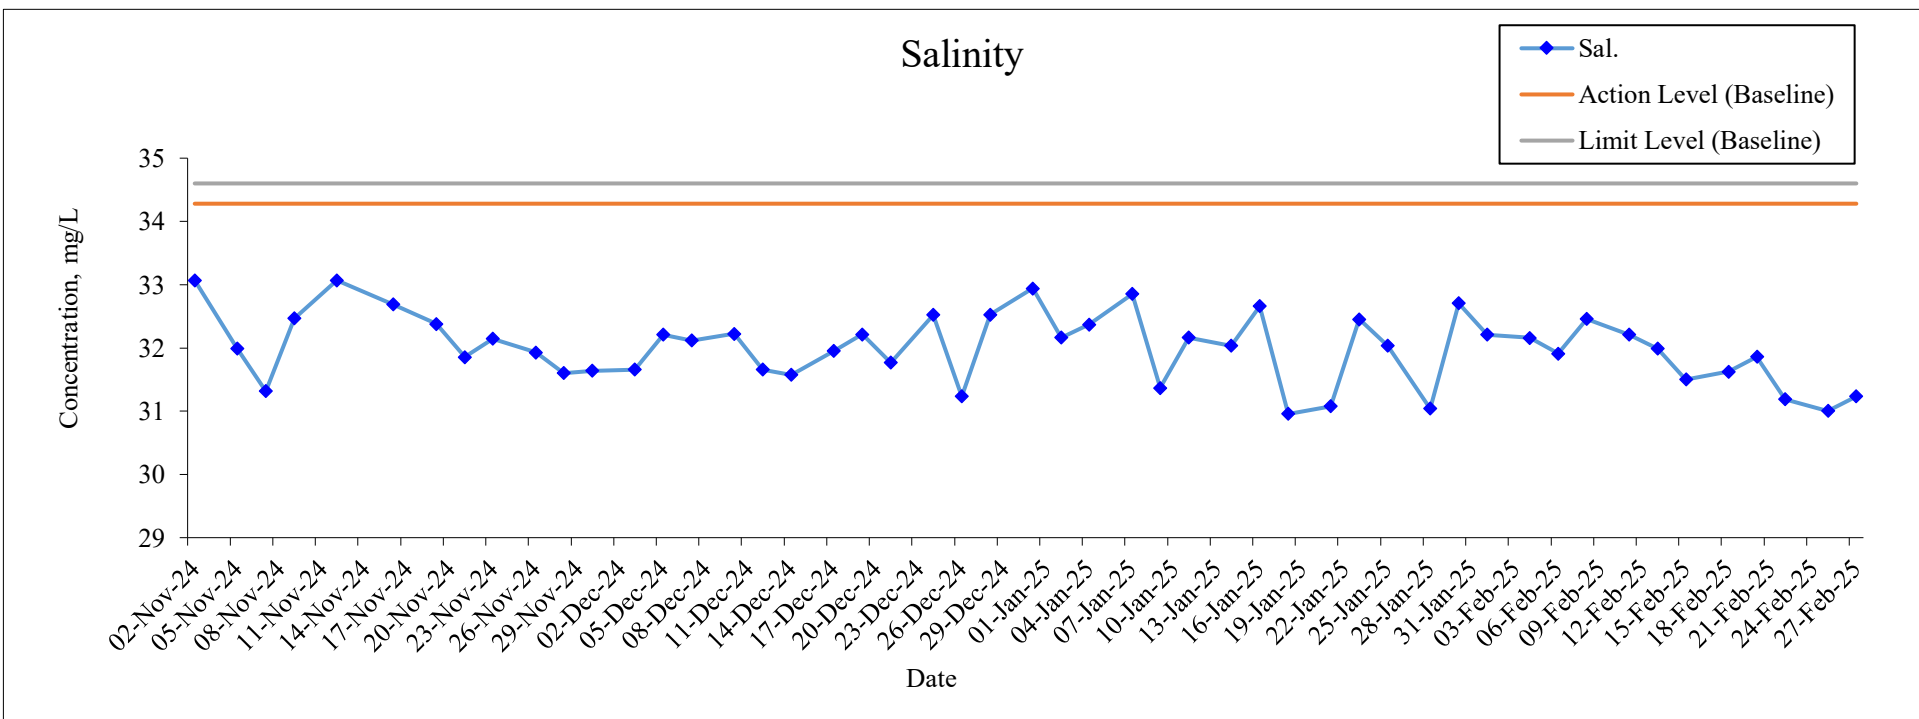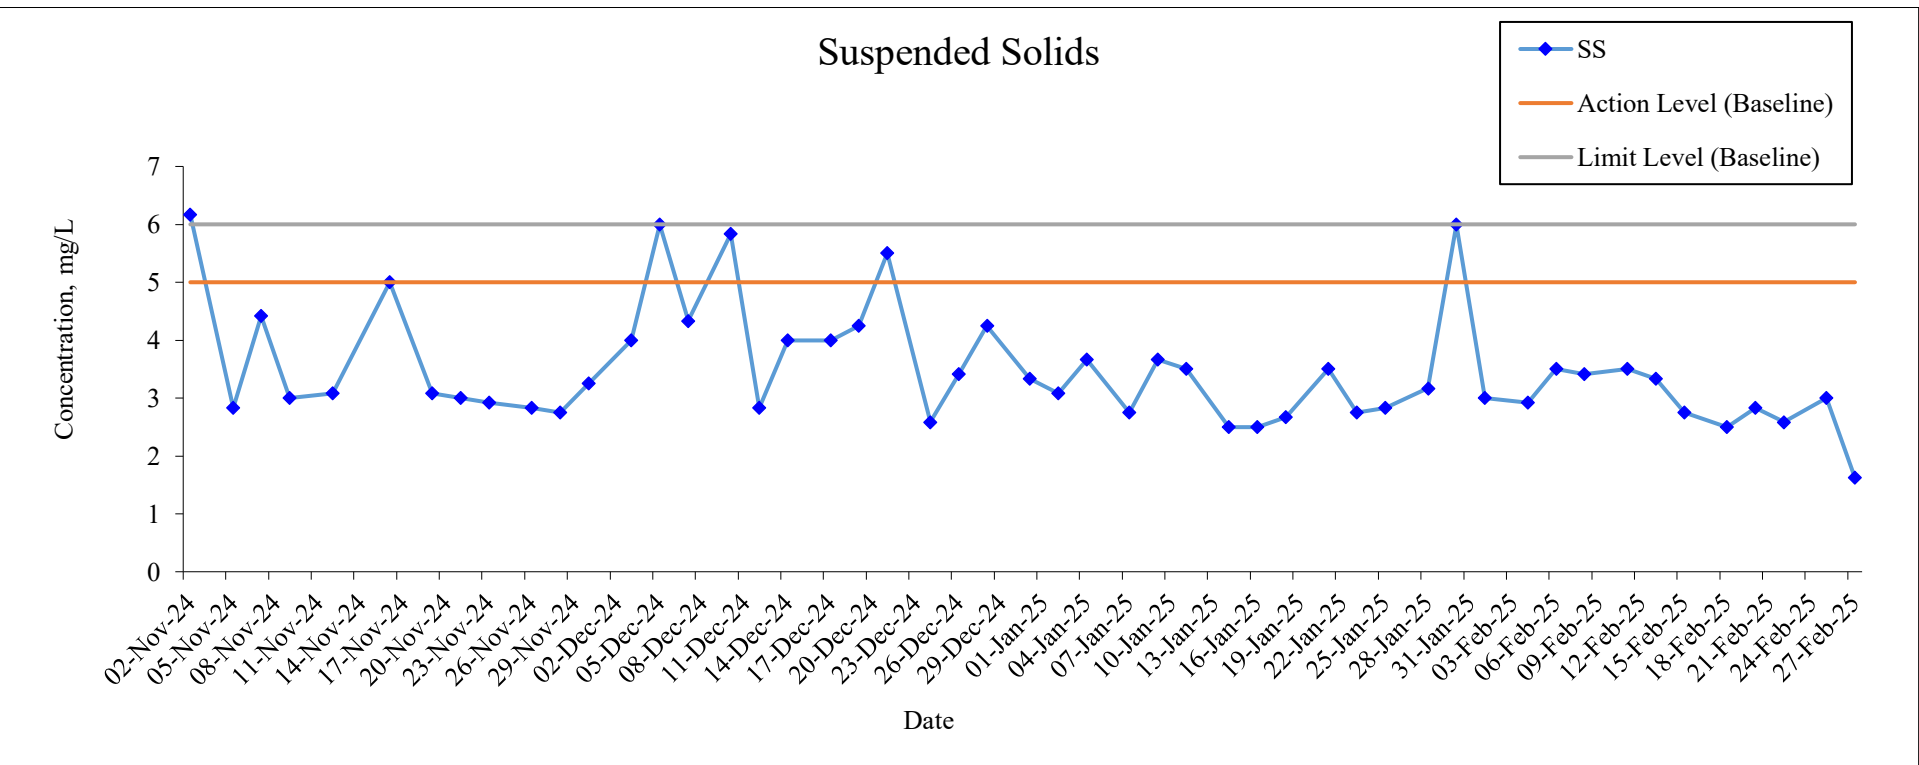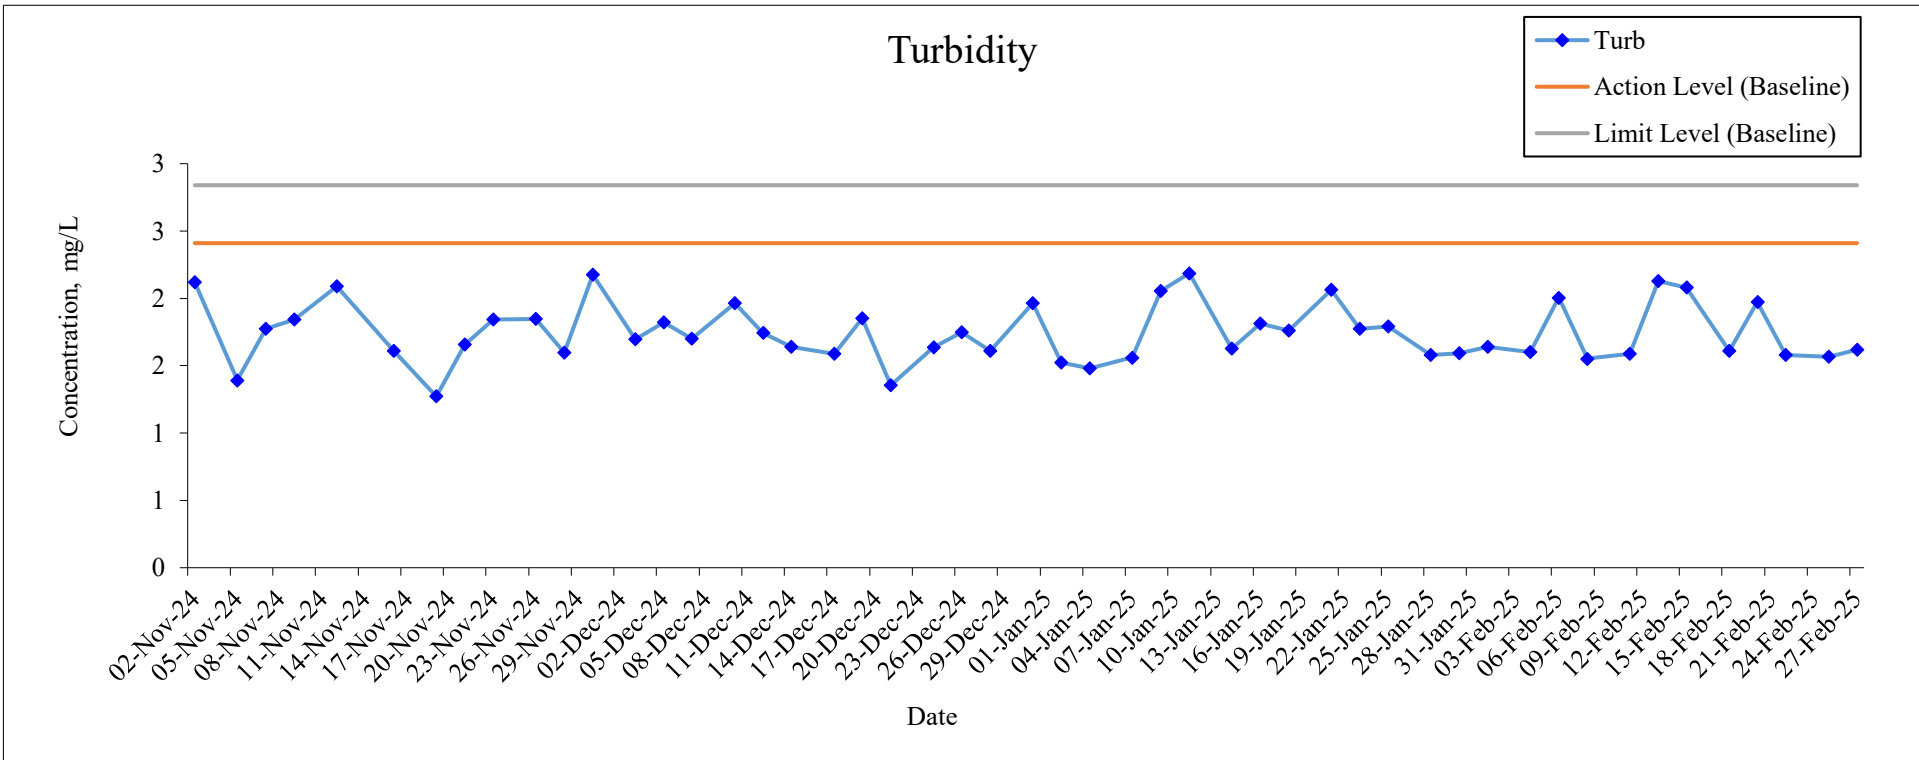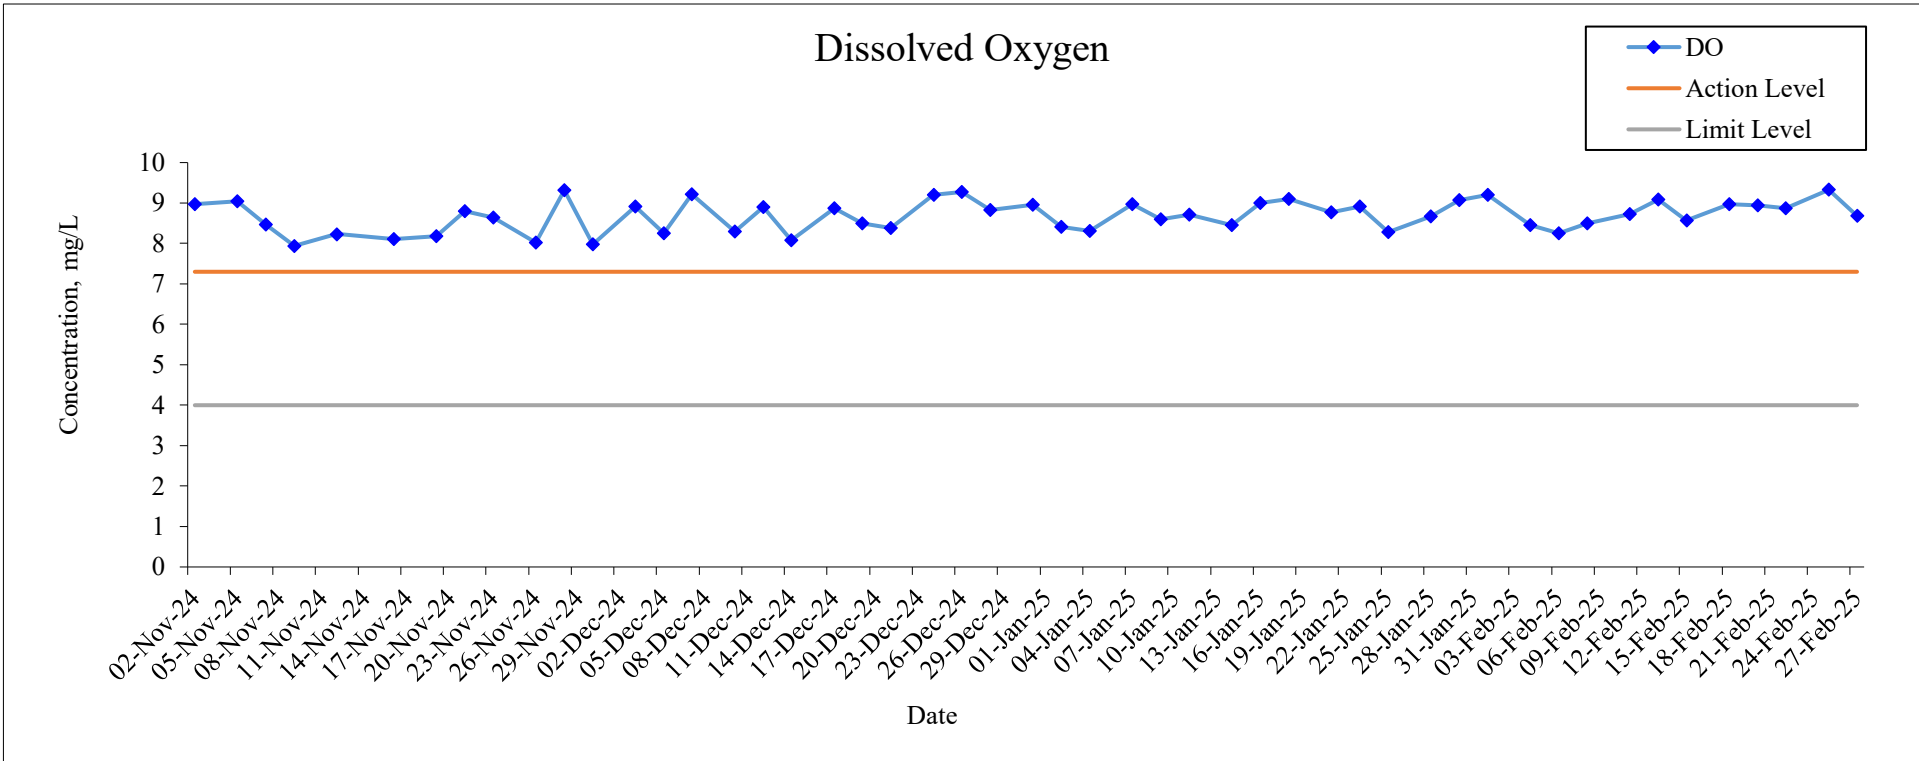

Monitoring Location: WSR33




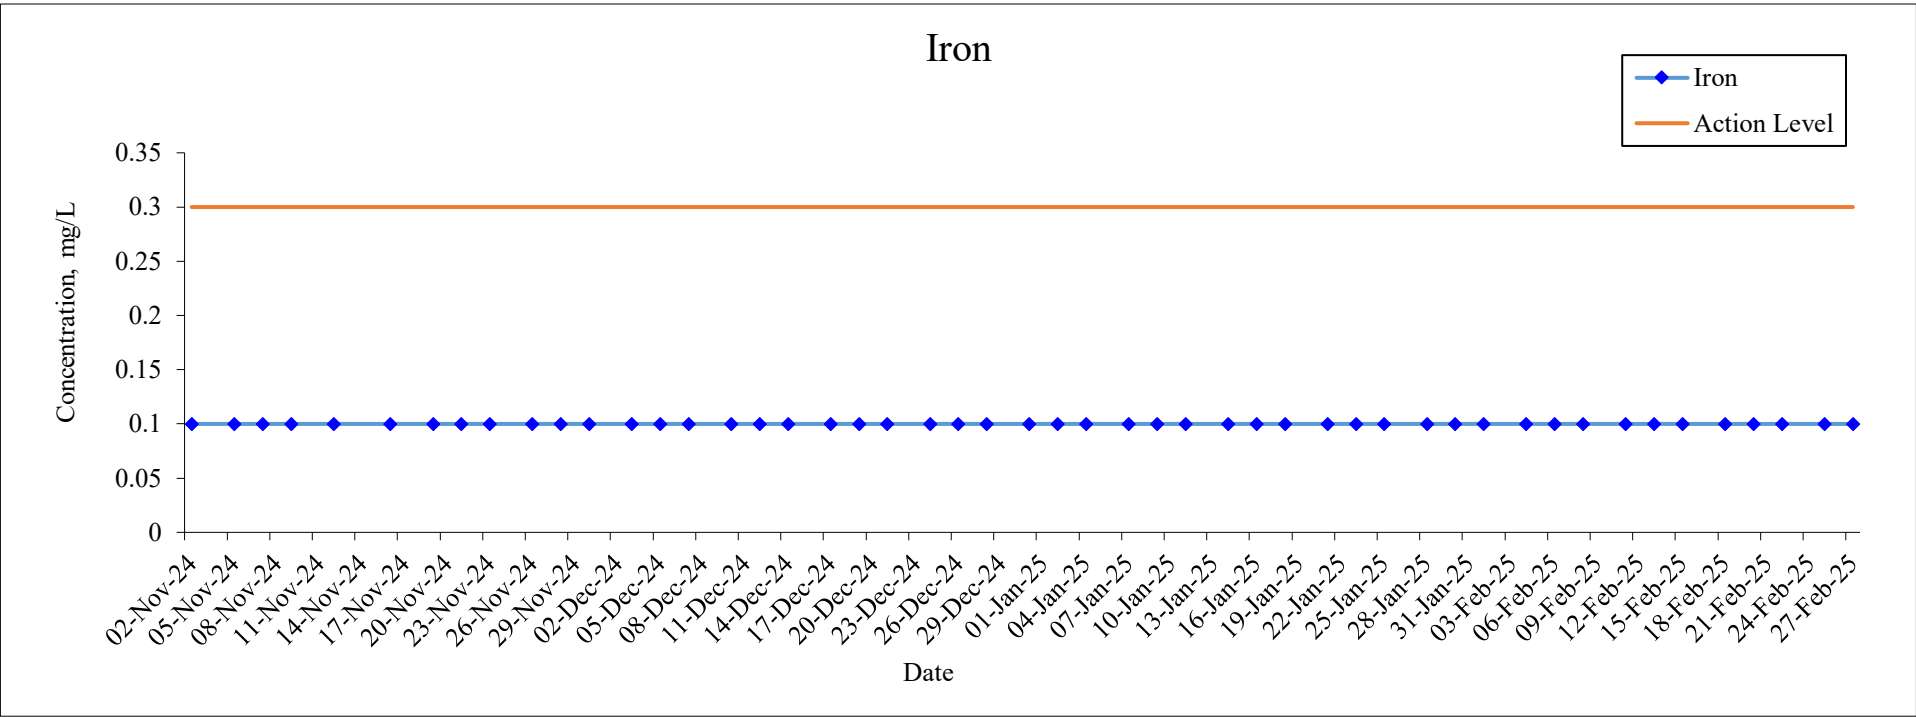


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

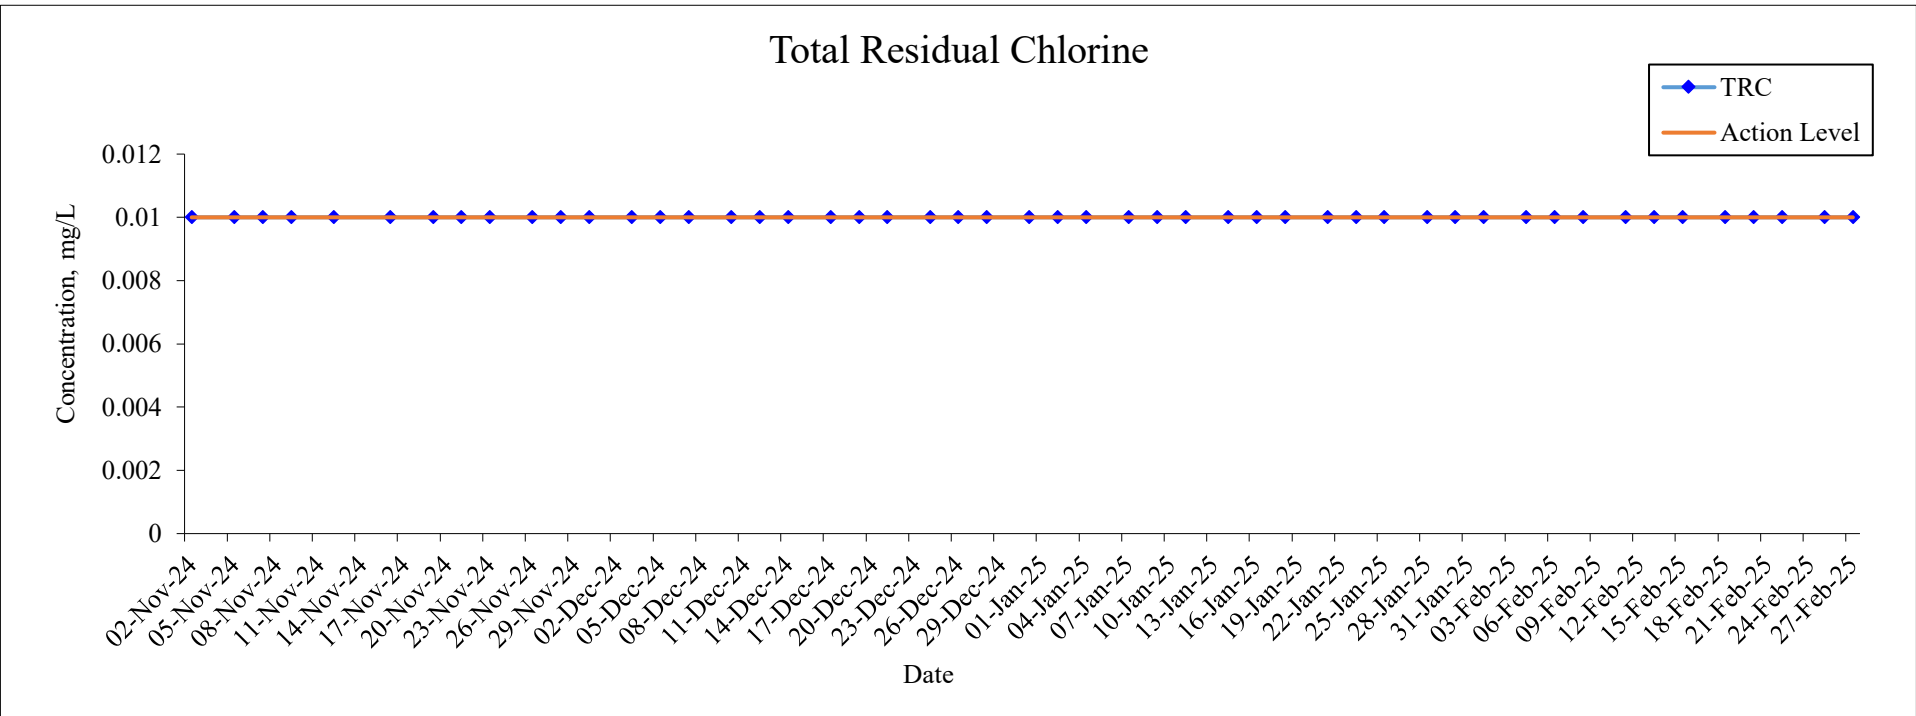


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR36

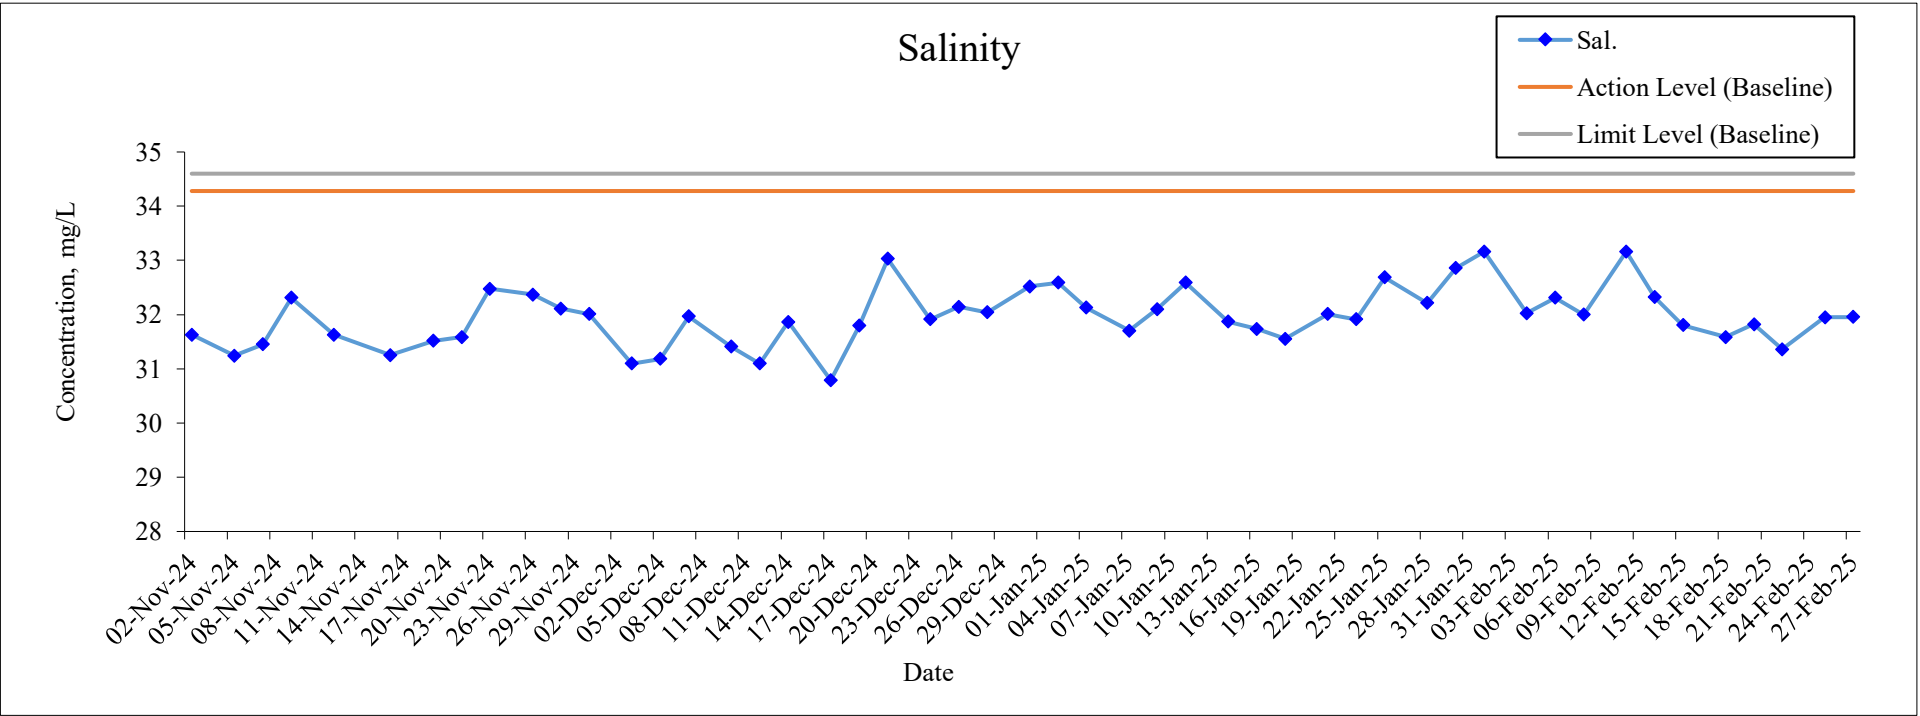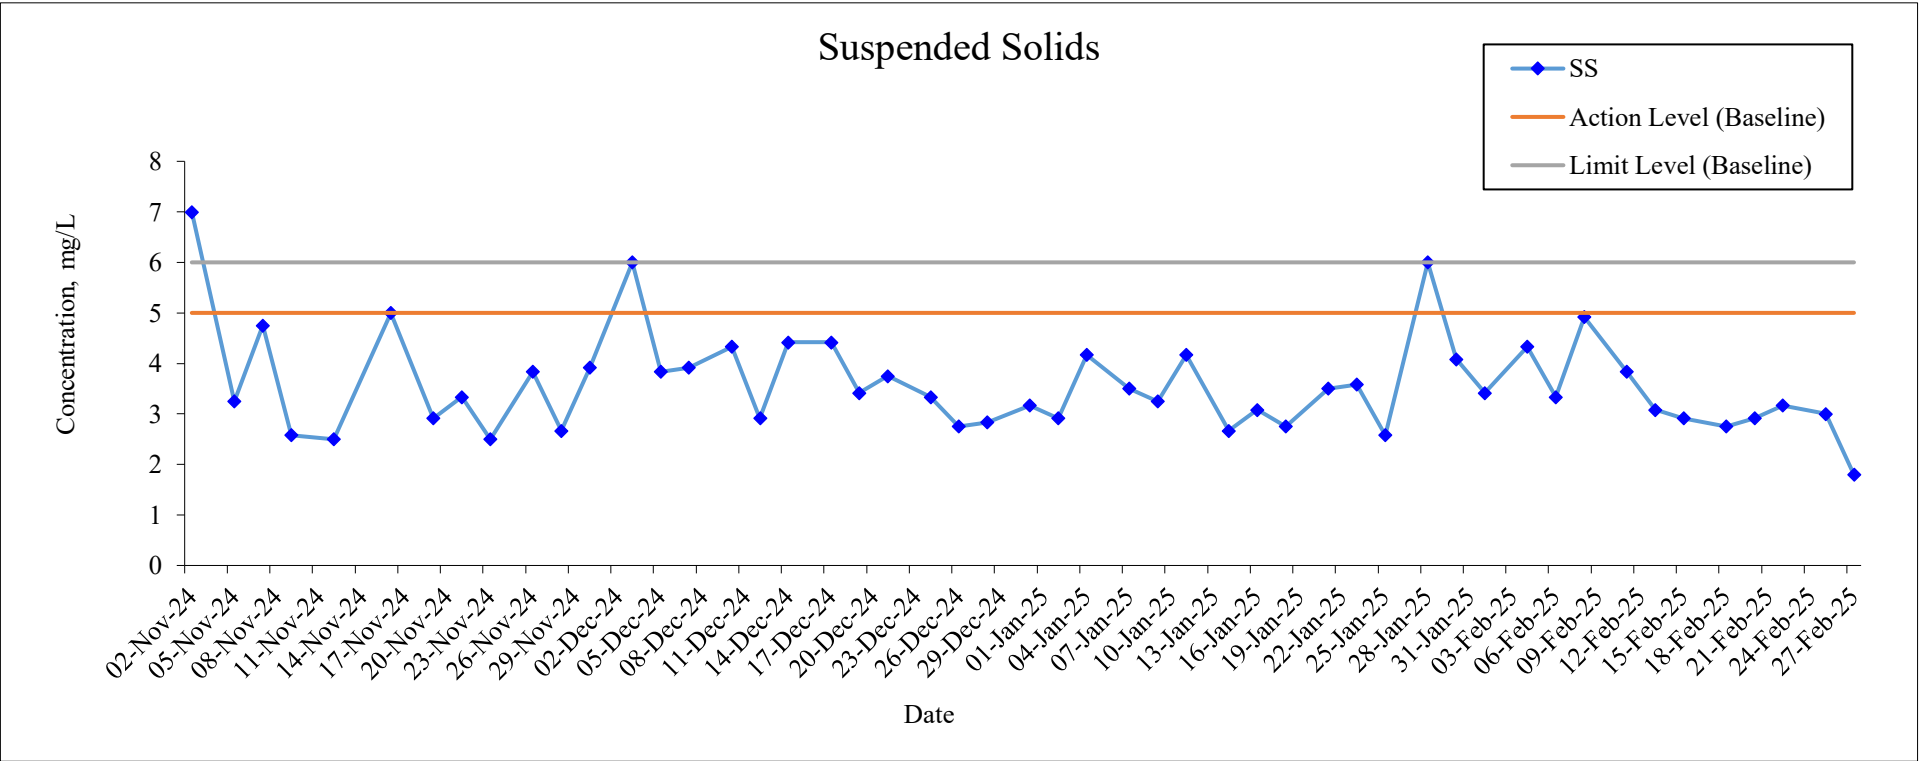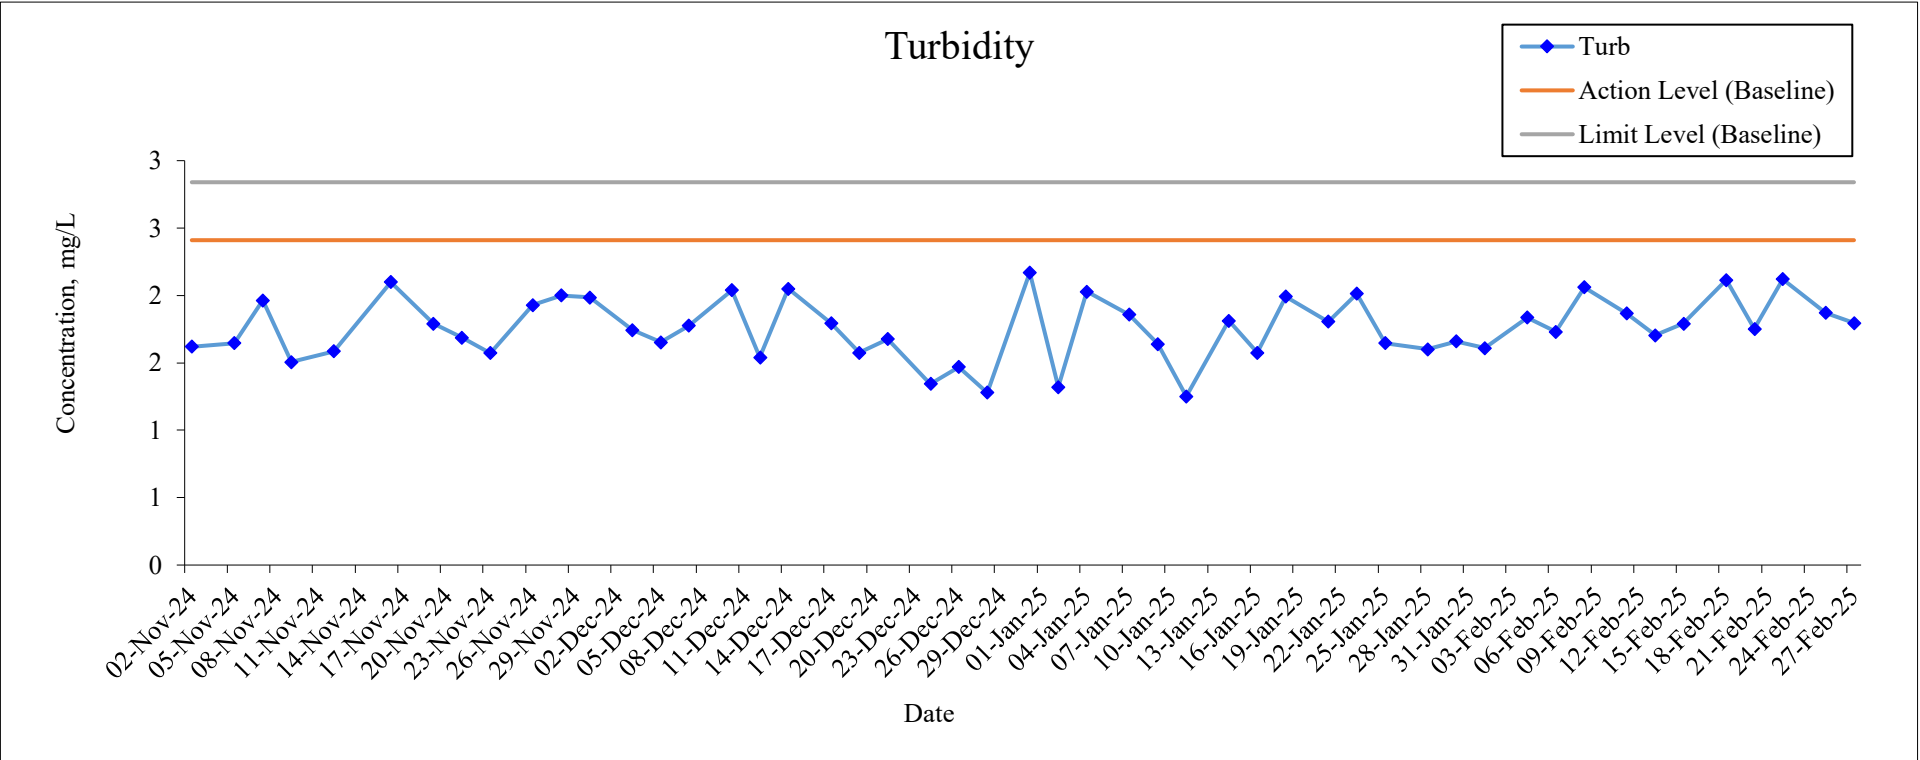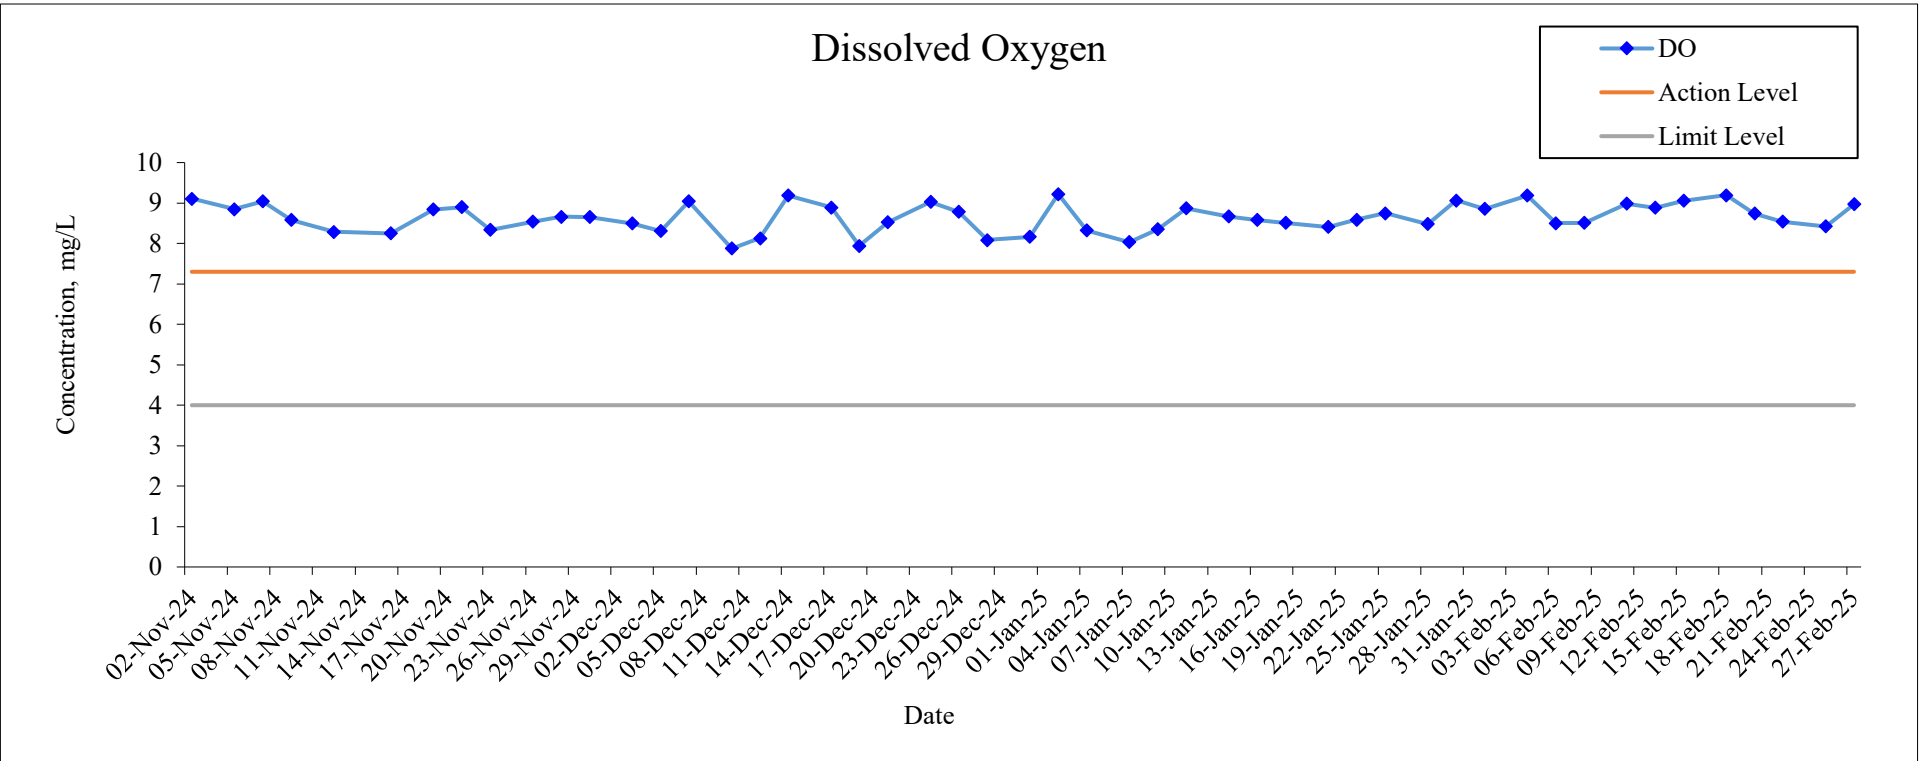

Monitoring Location: WSR36




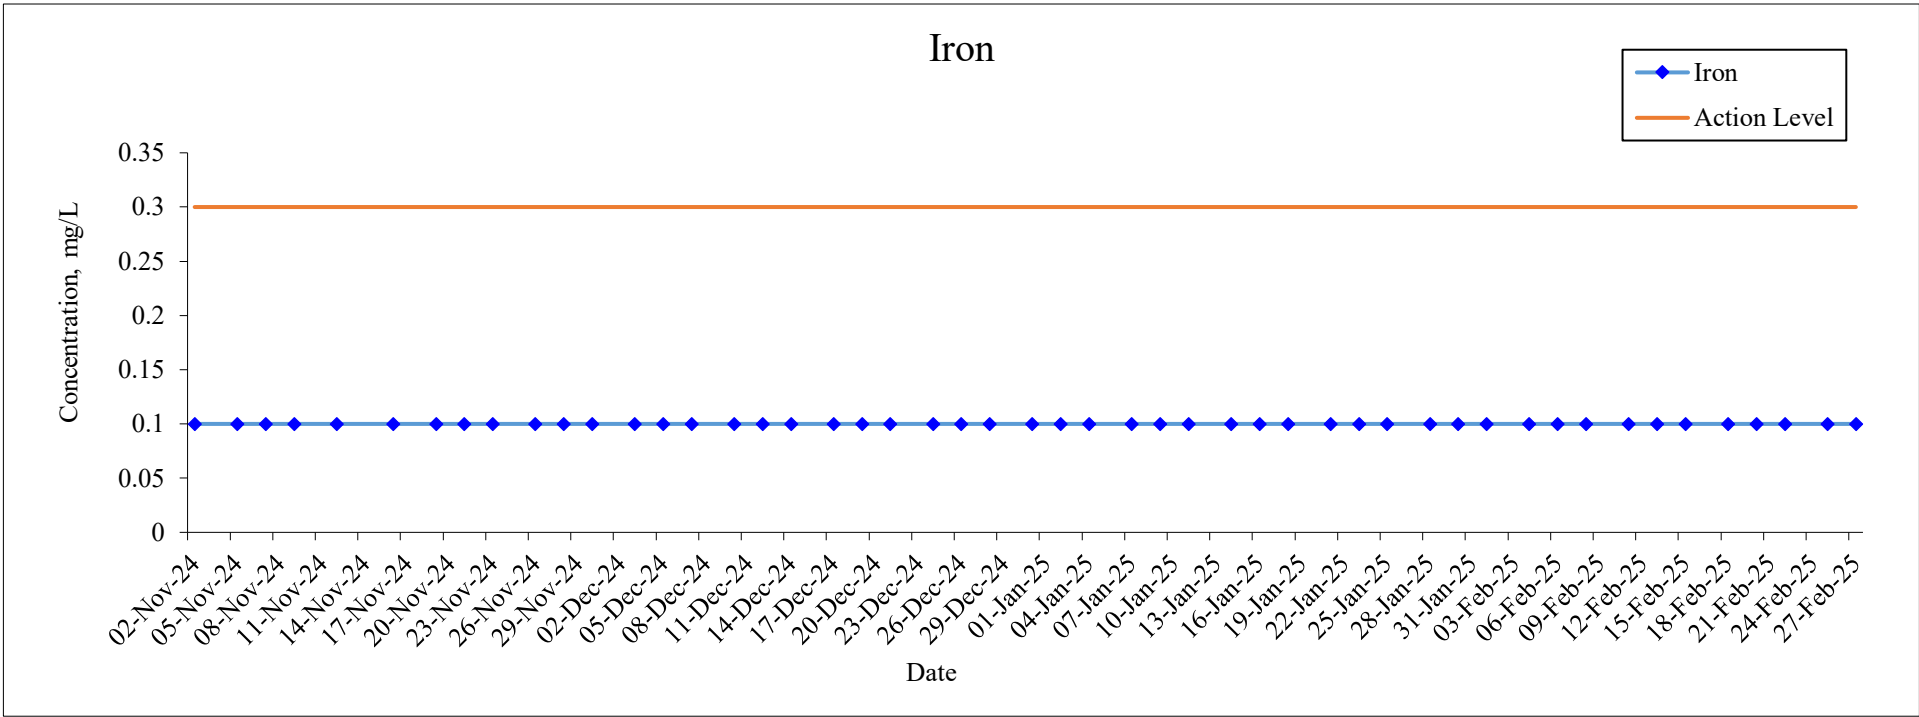


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

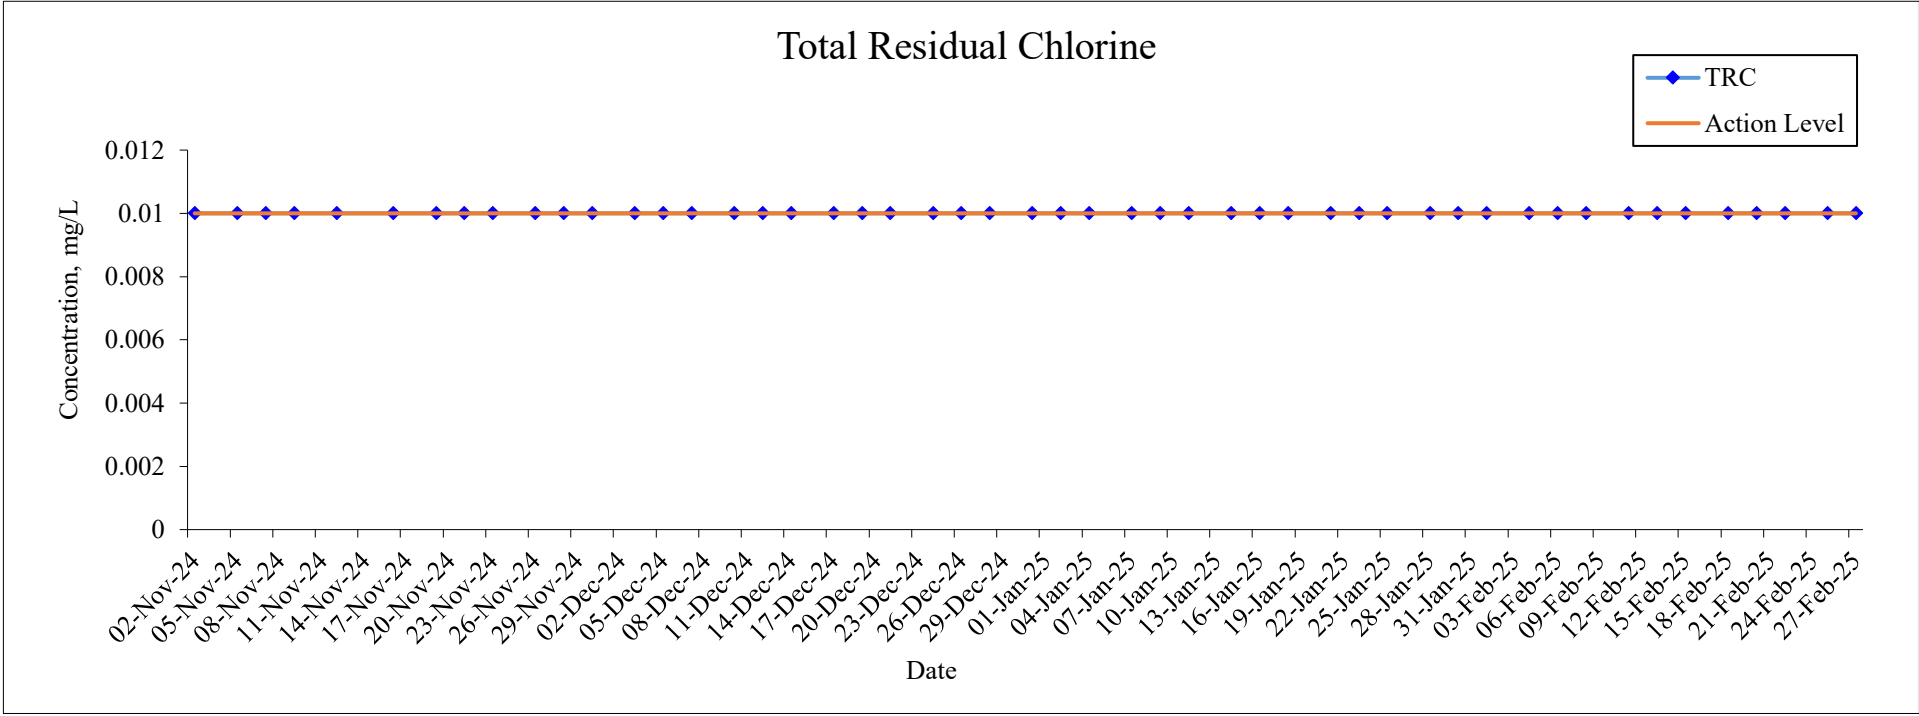


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: WSR37

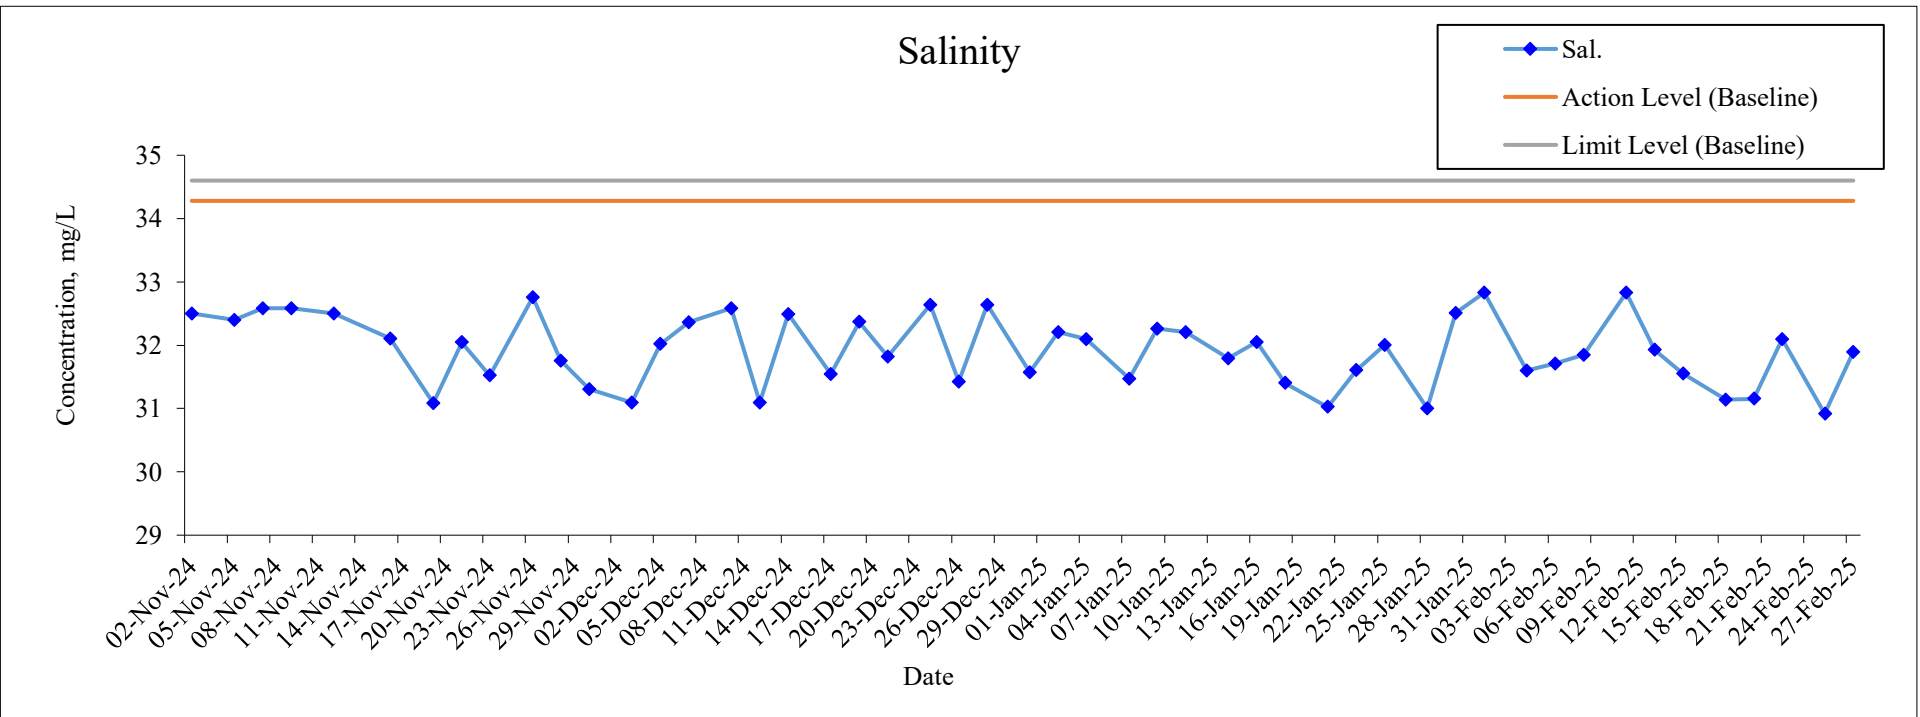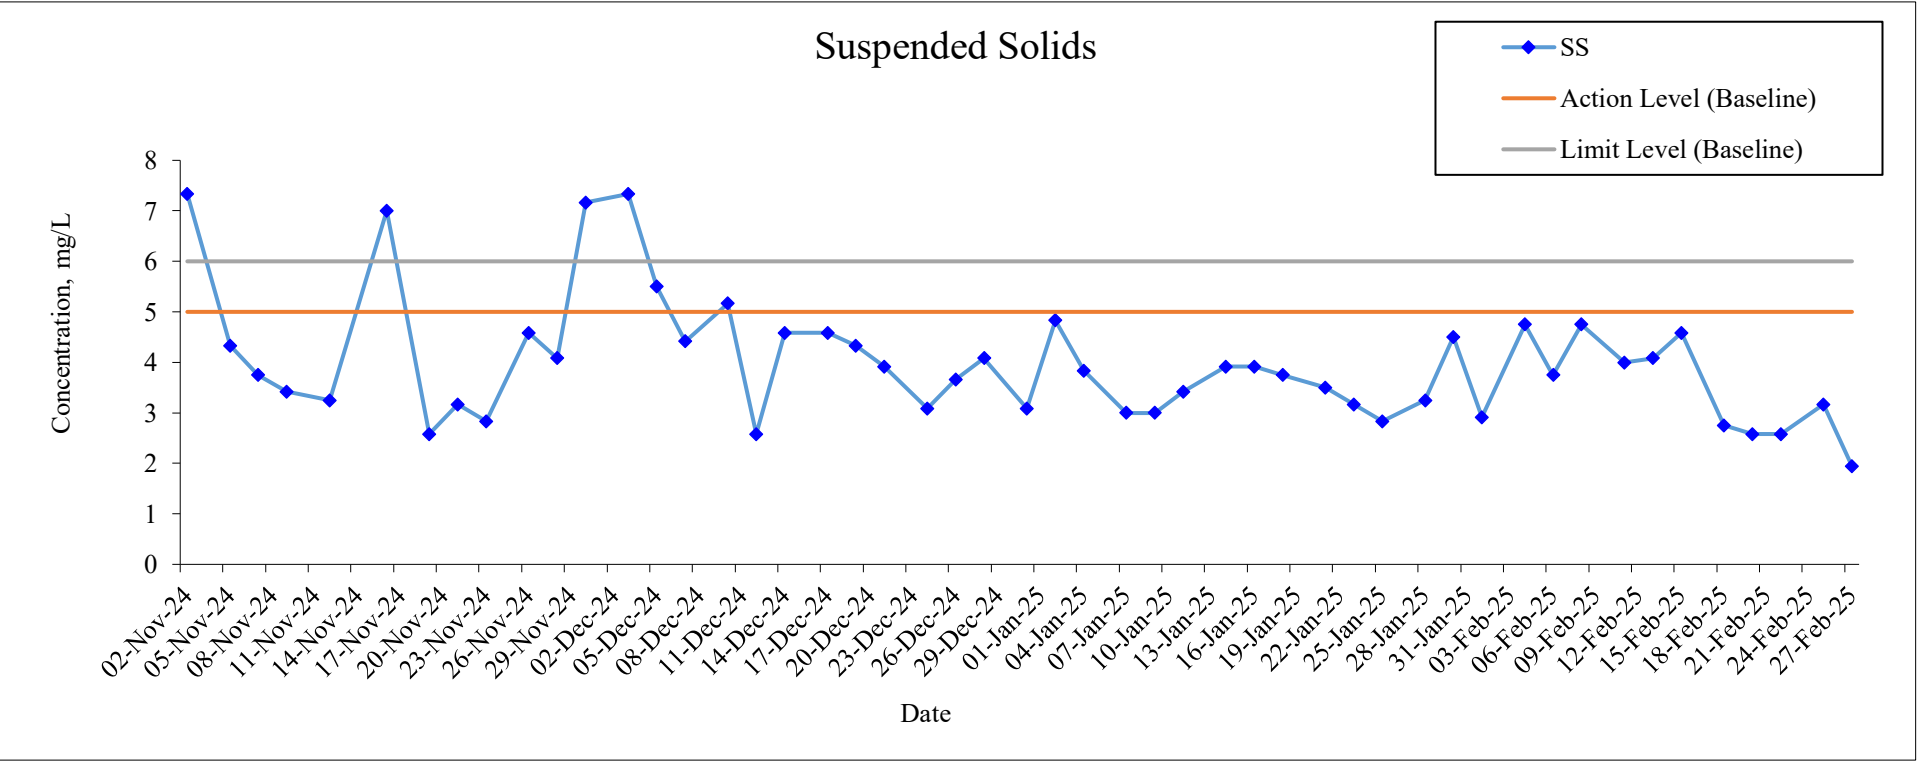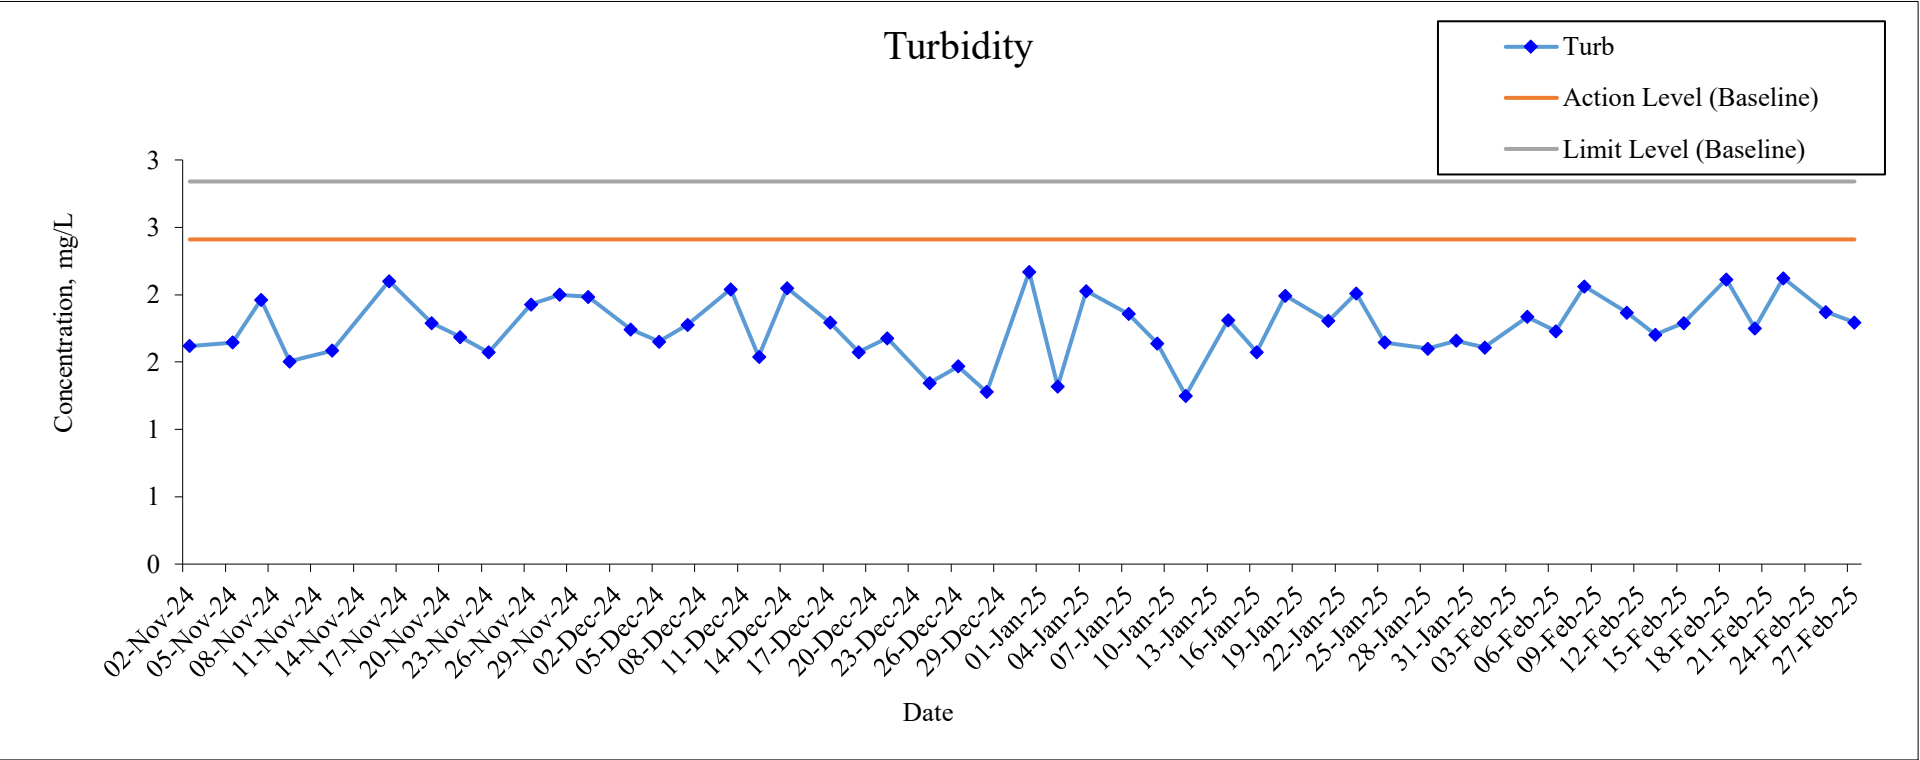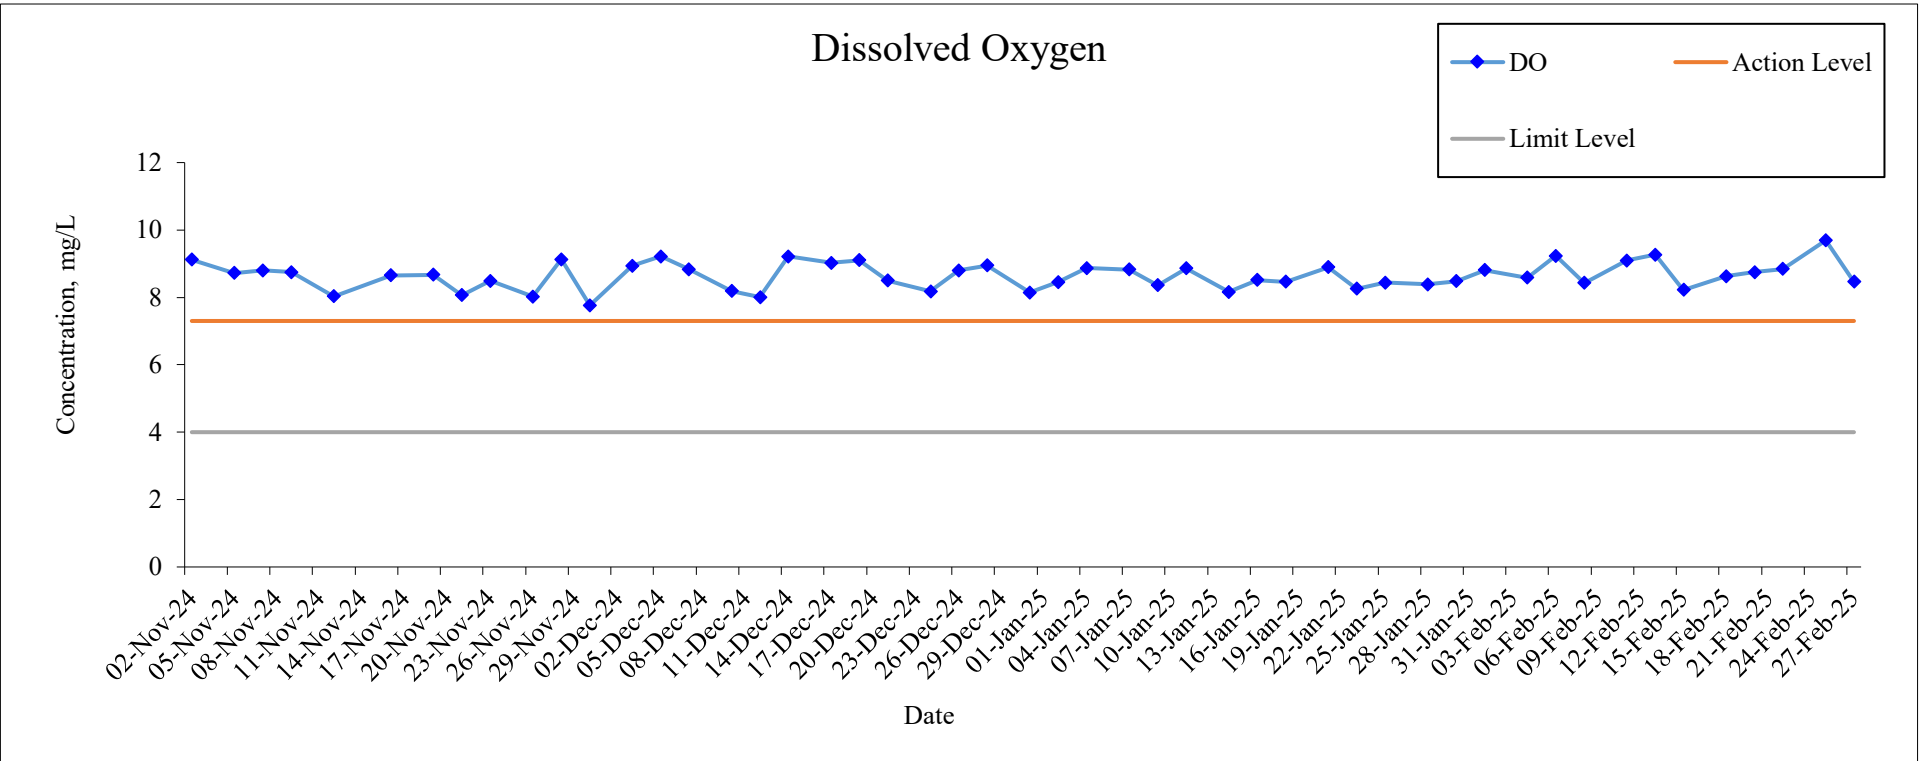

Monitoring Location: WSR37




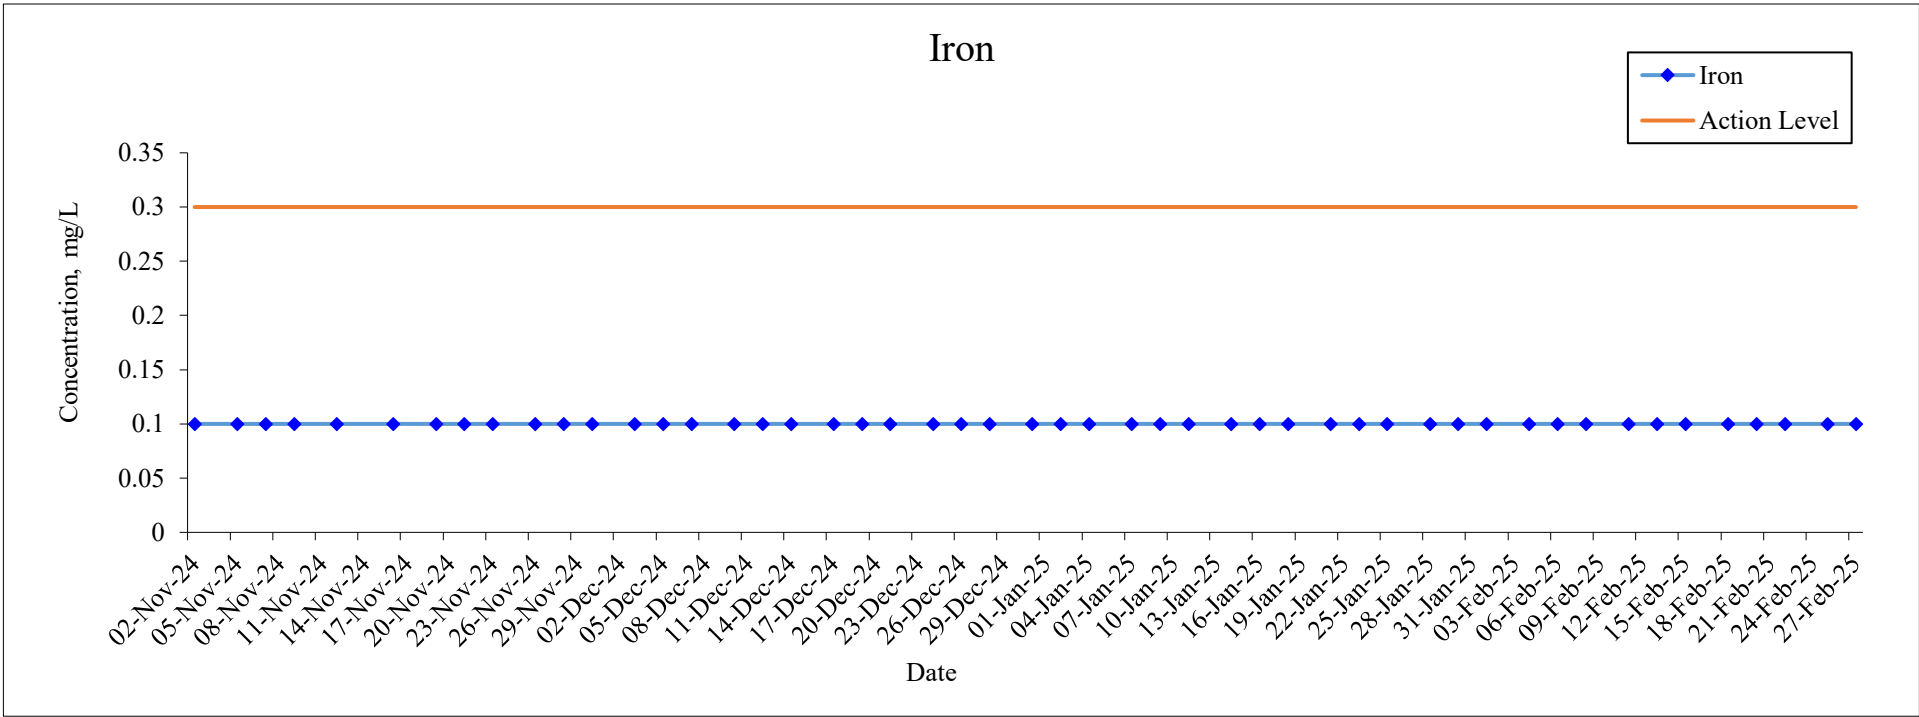


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

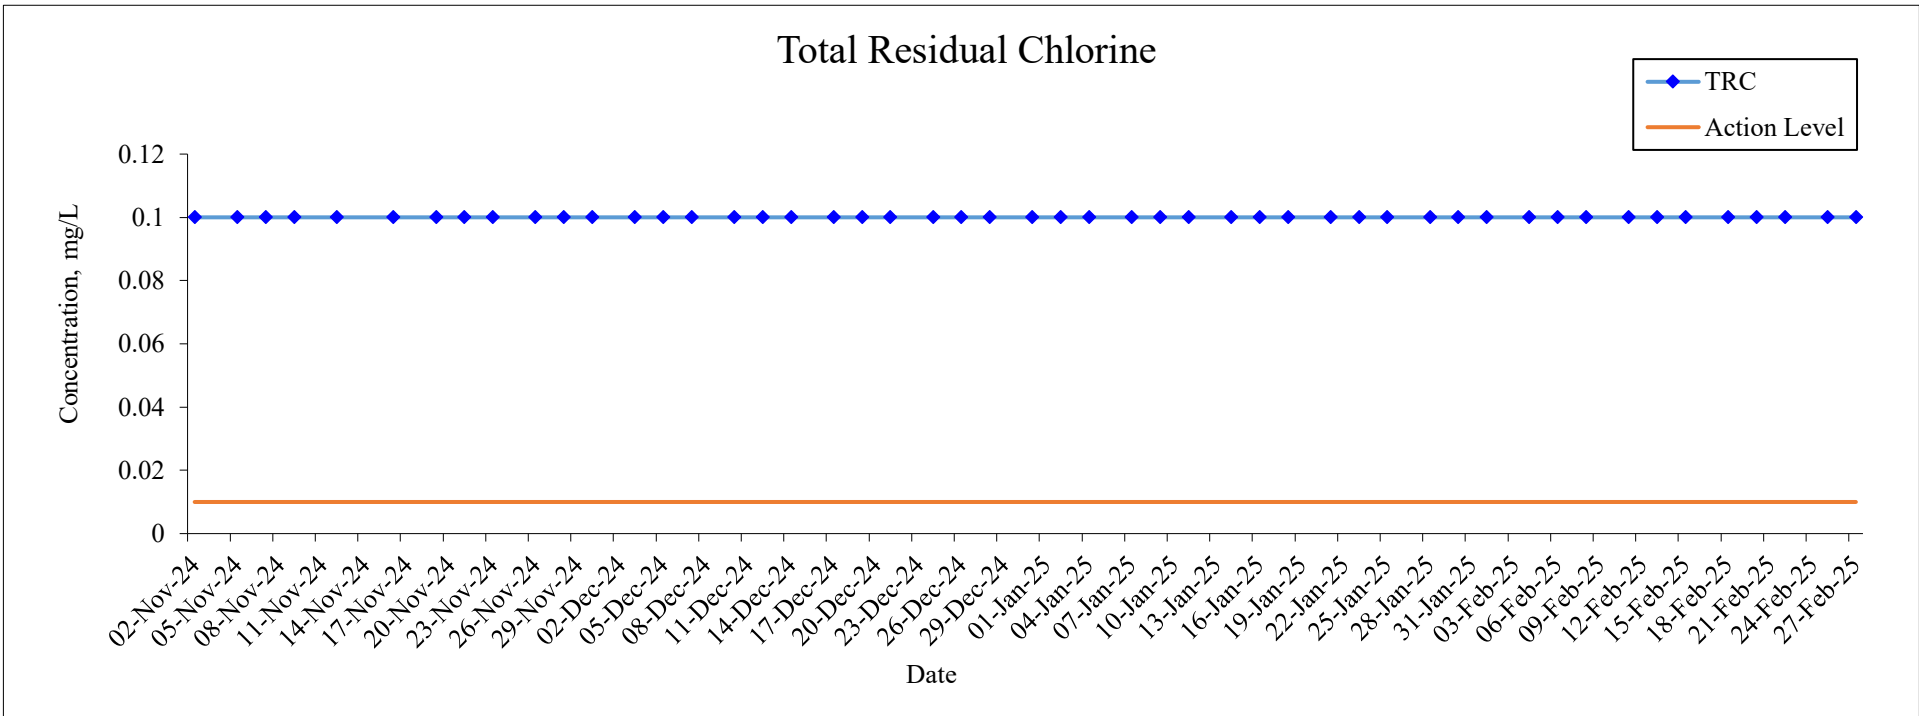


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: NF1

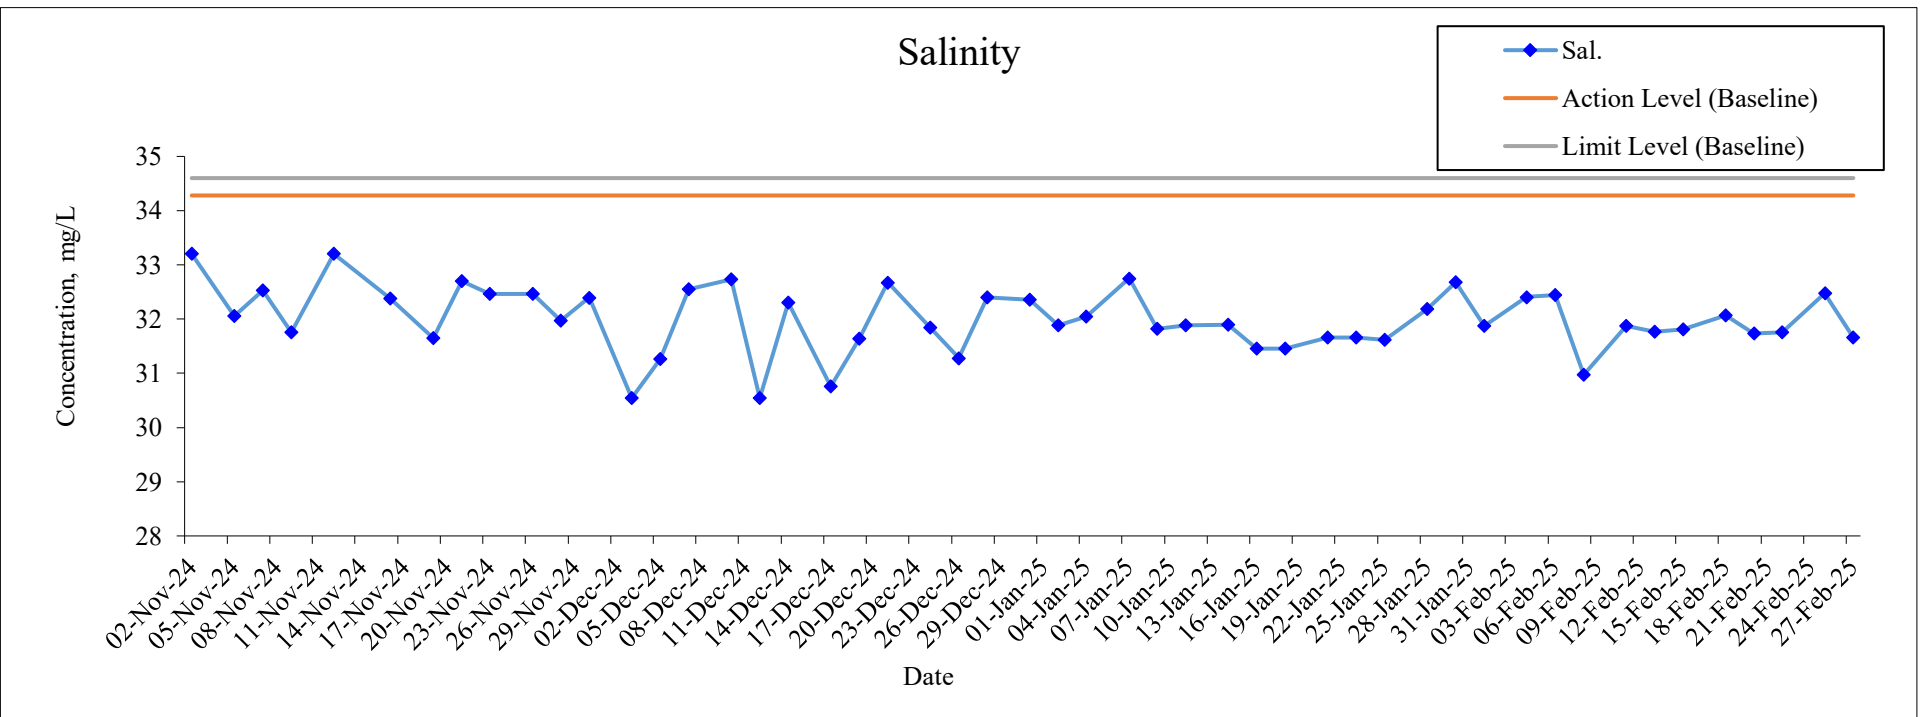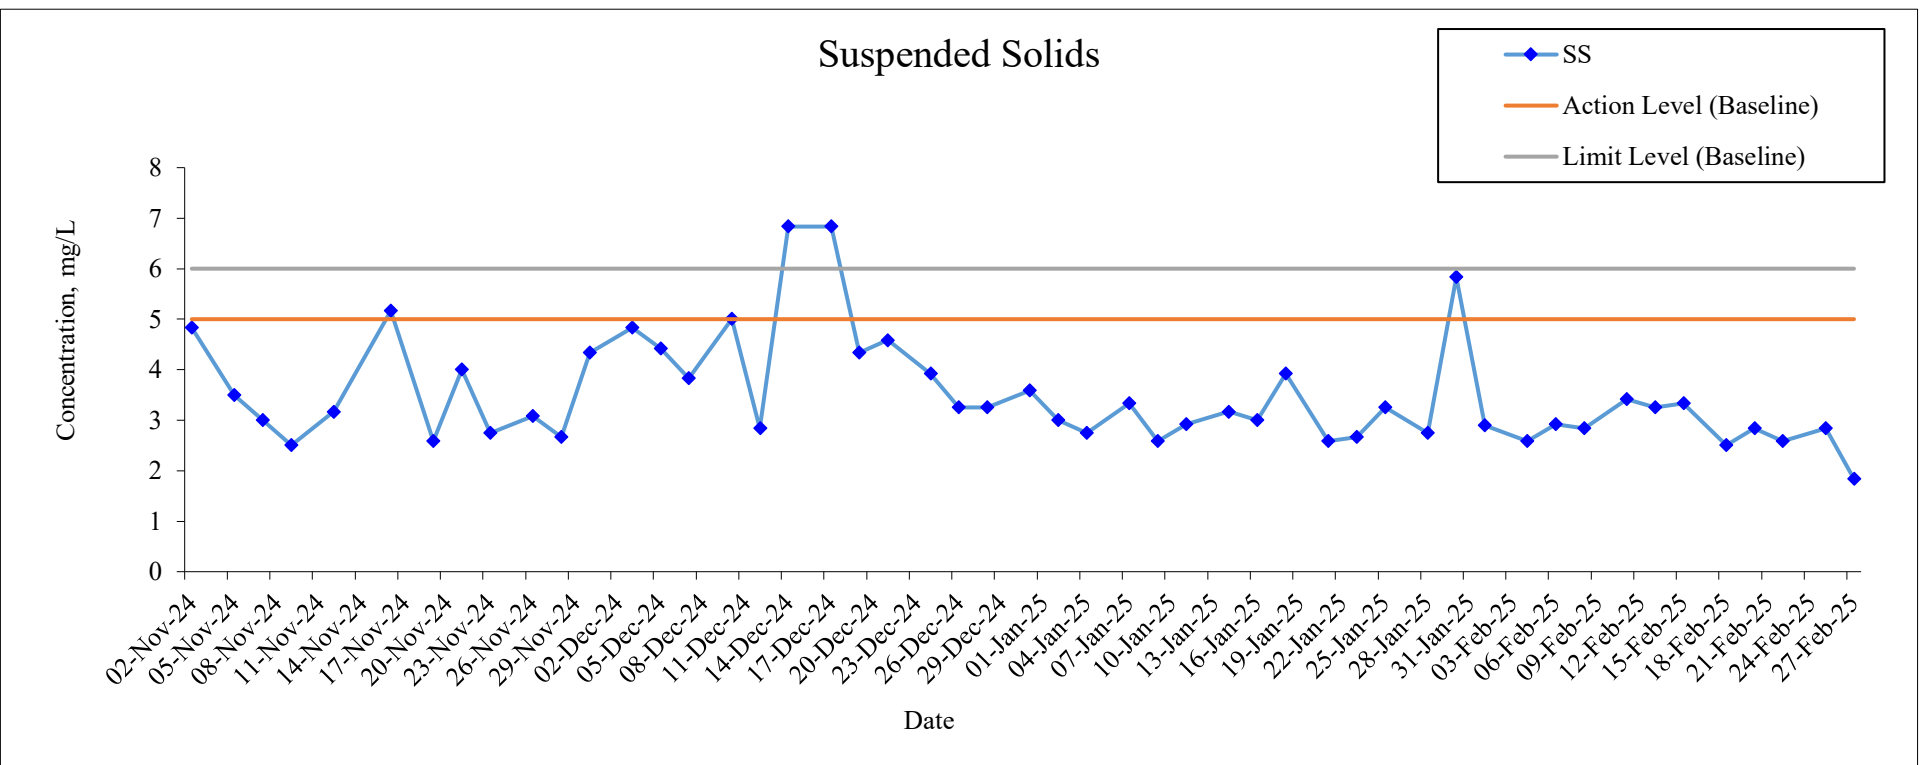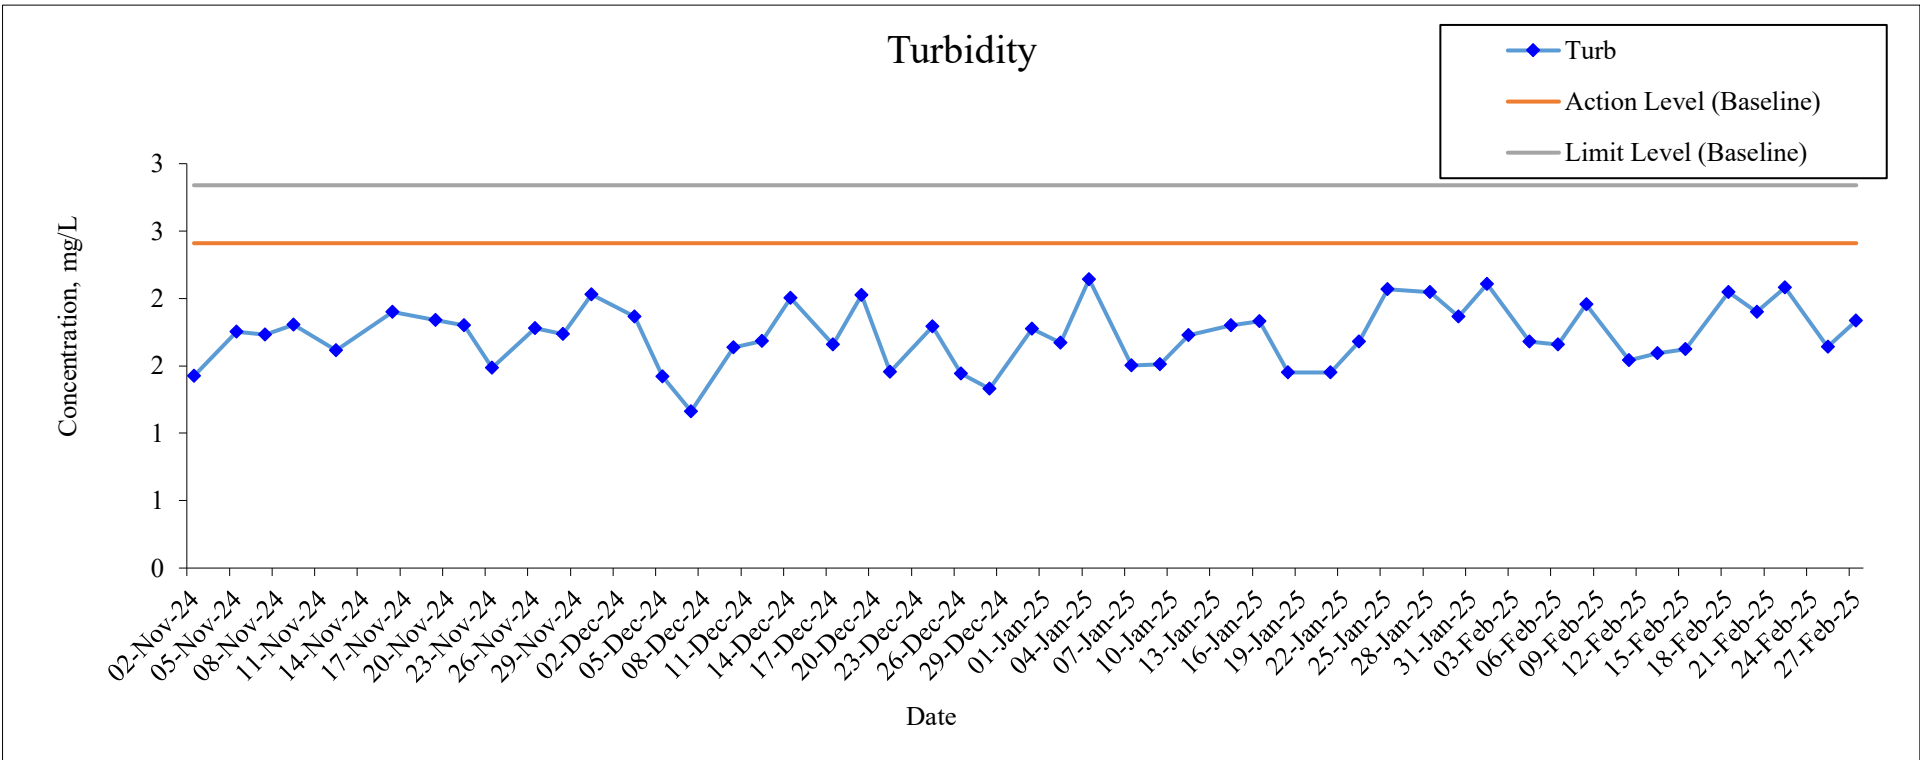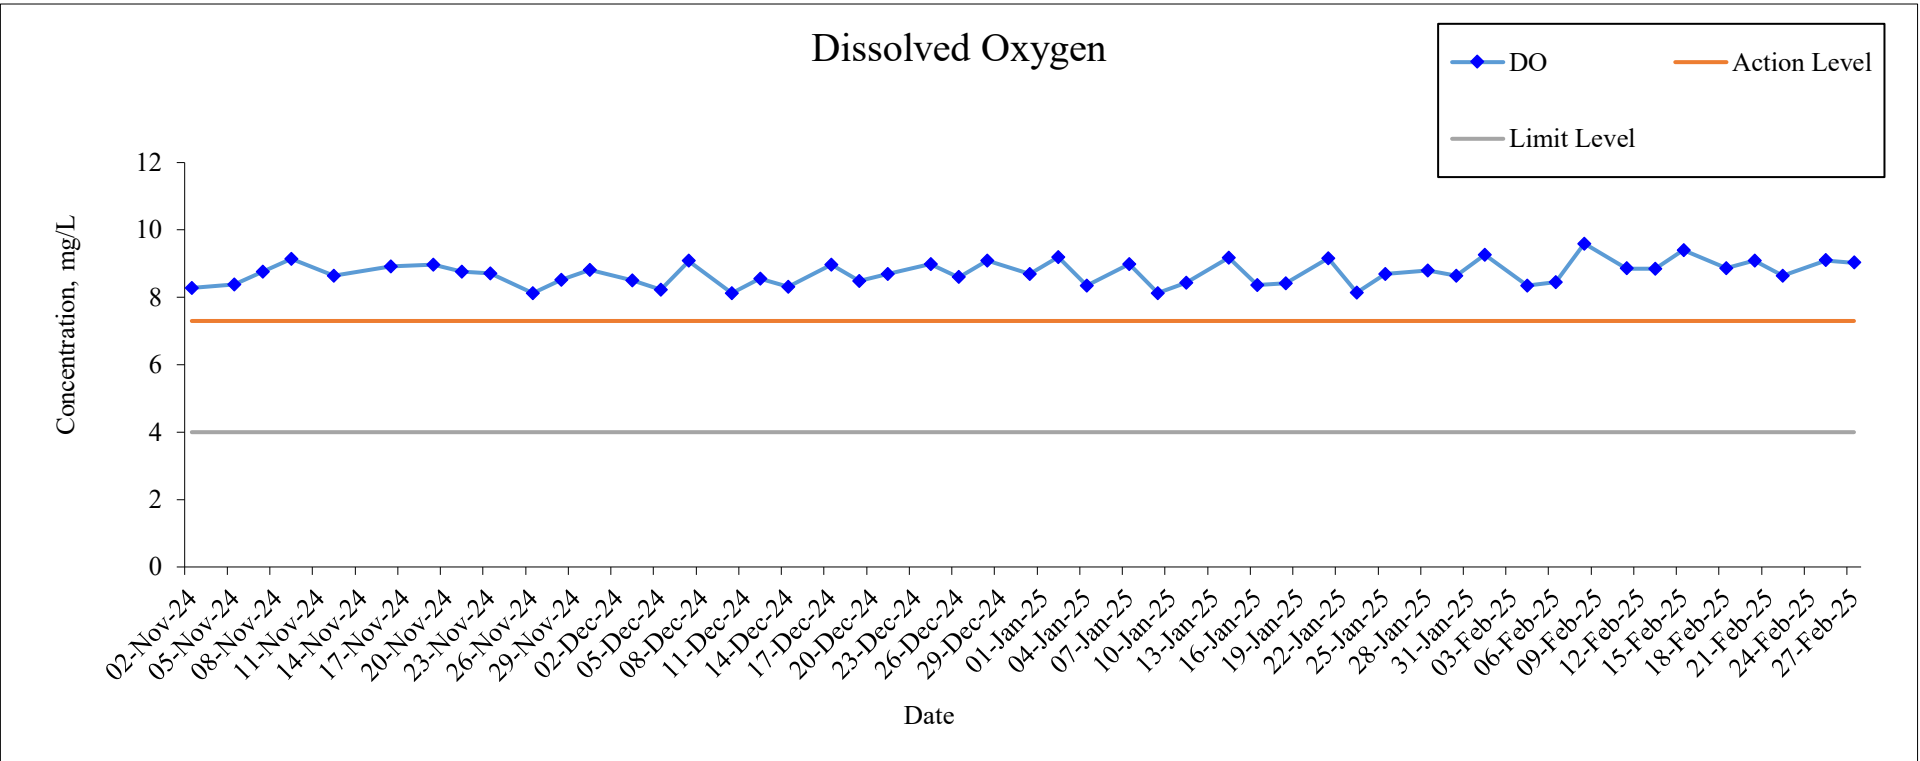

Monitoring Location: NF1

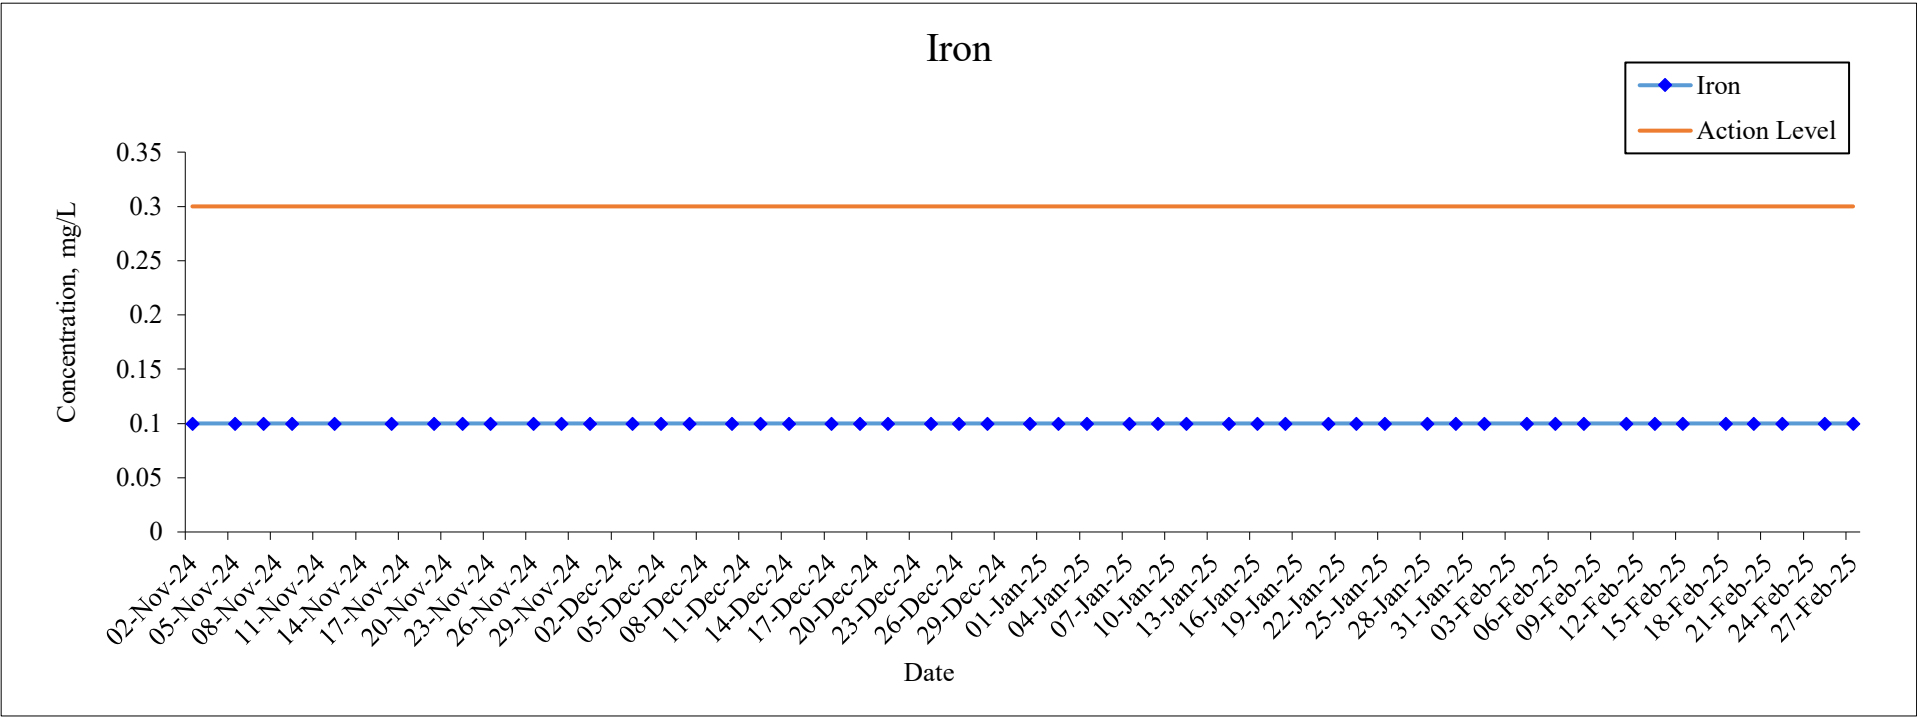


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

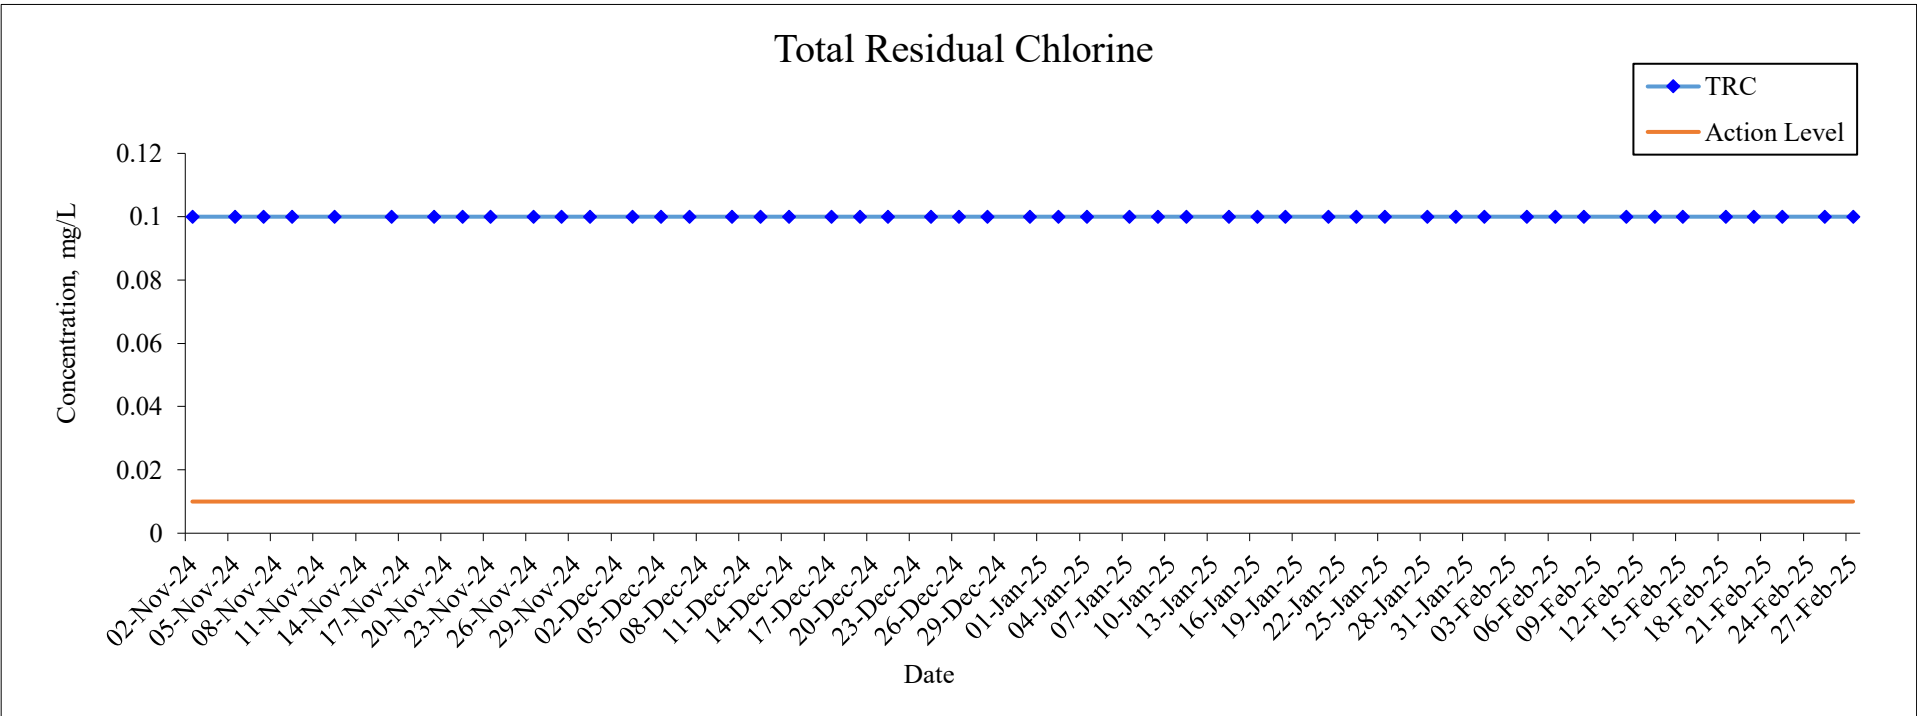


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: NF2

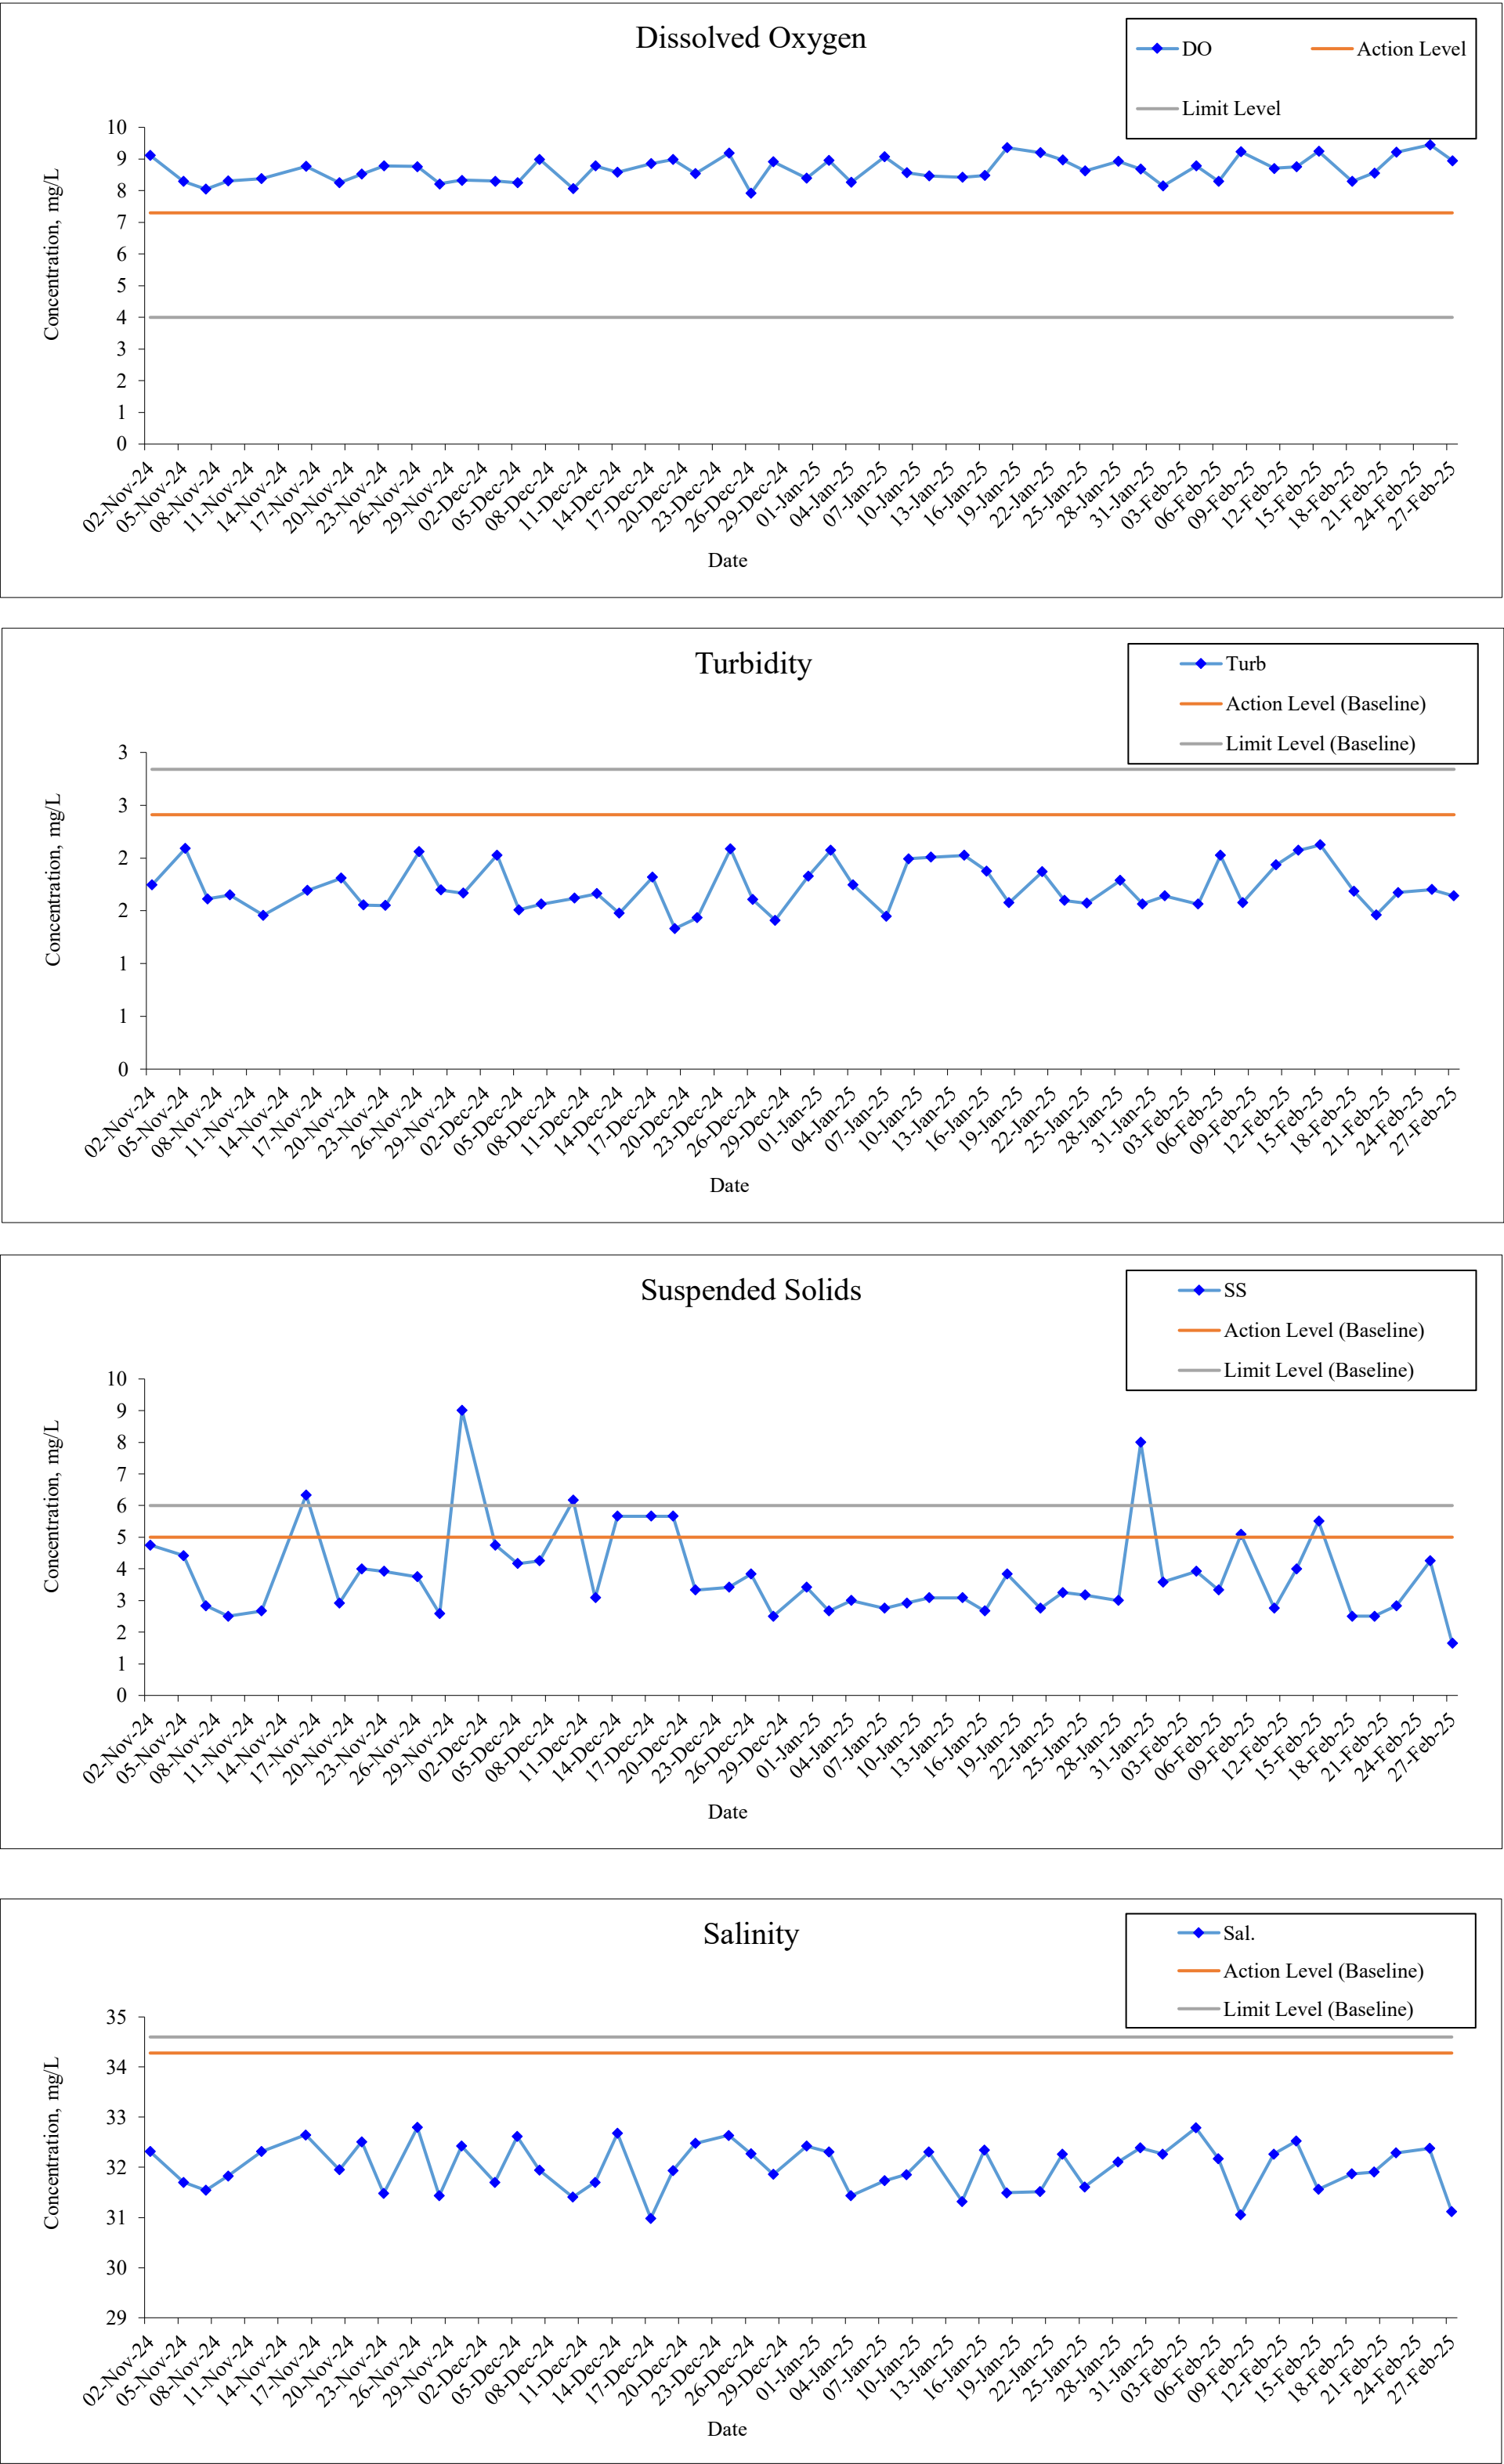

Monitoring Location: NF2

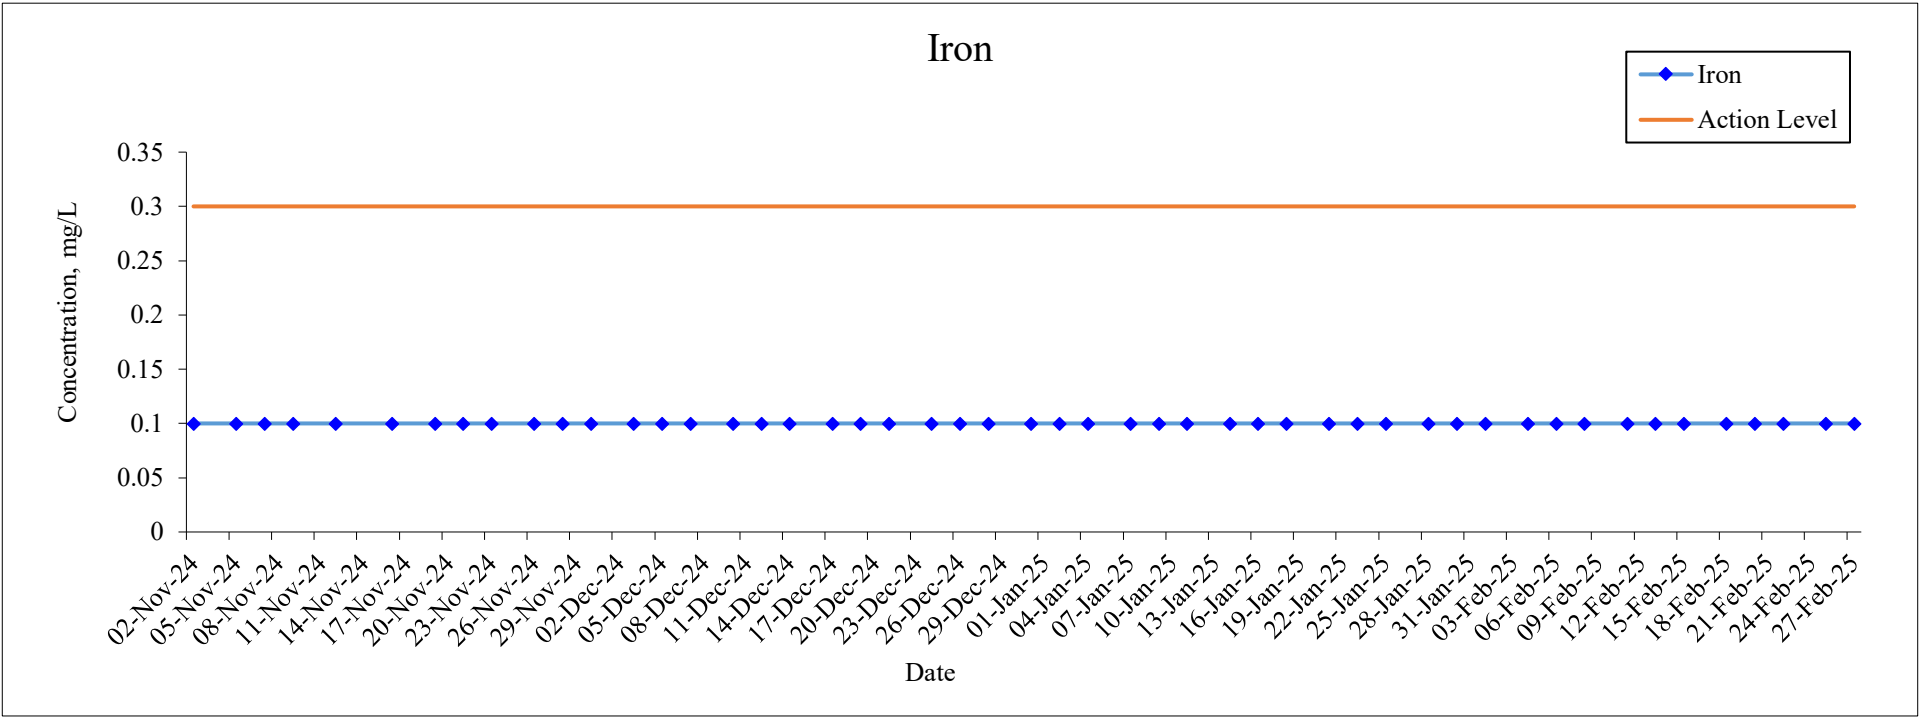


Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

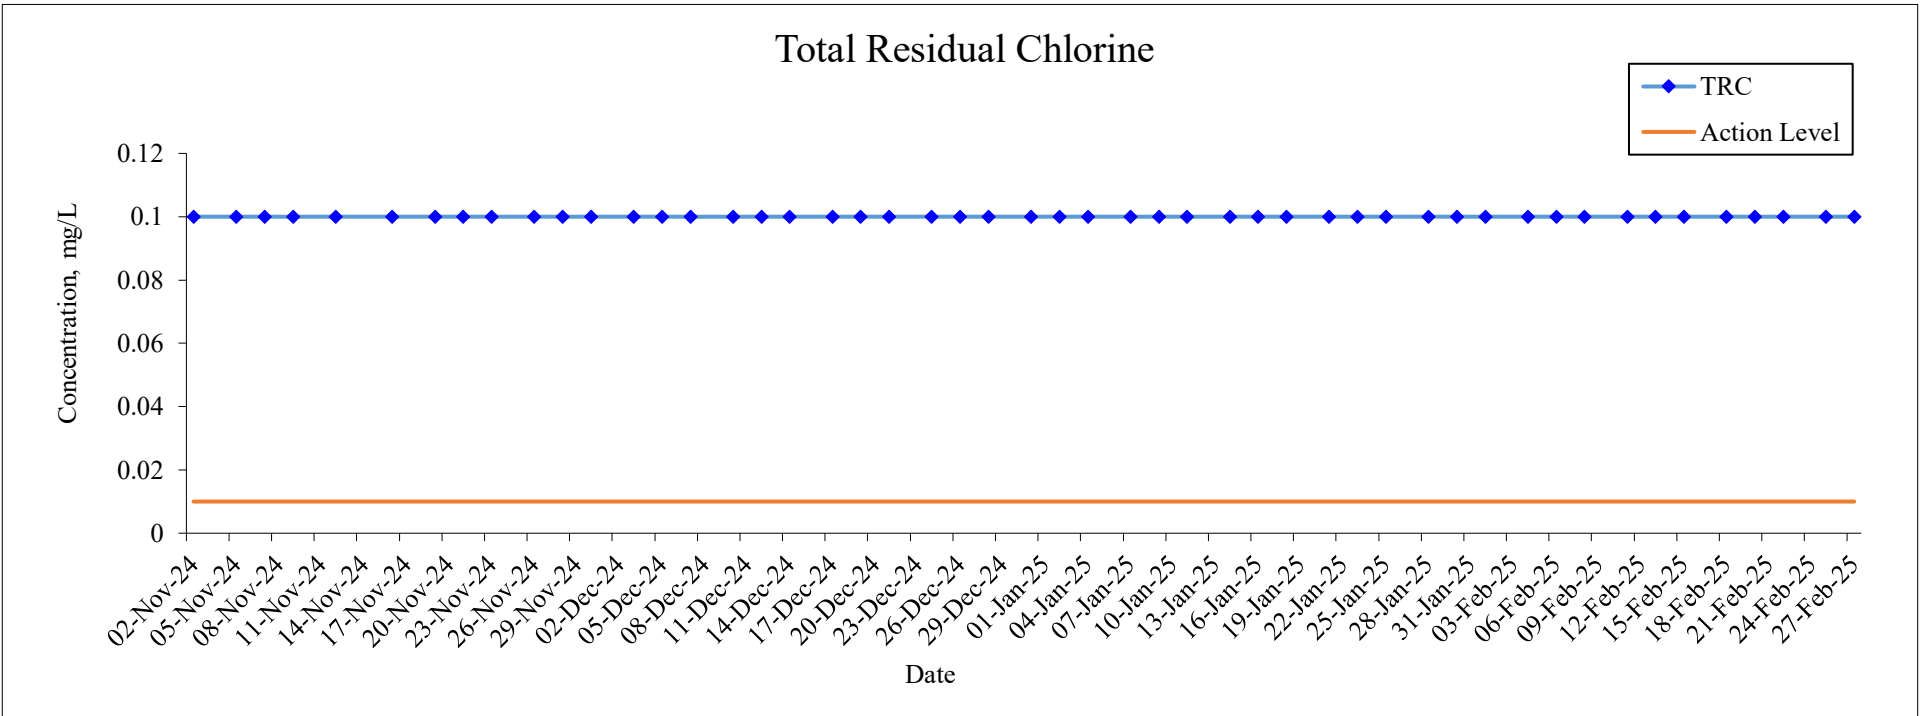


Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.


Monitoring Location: NF3

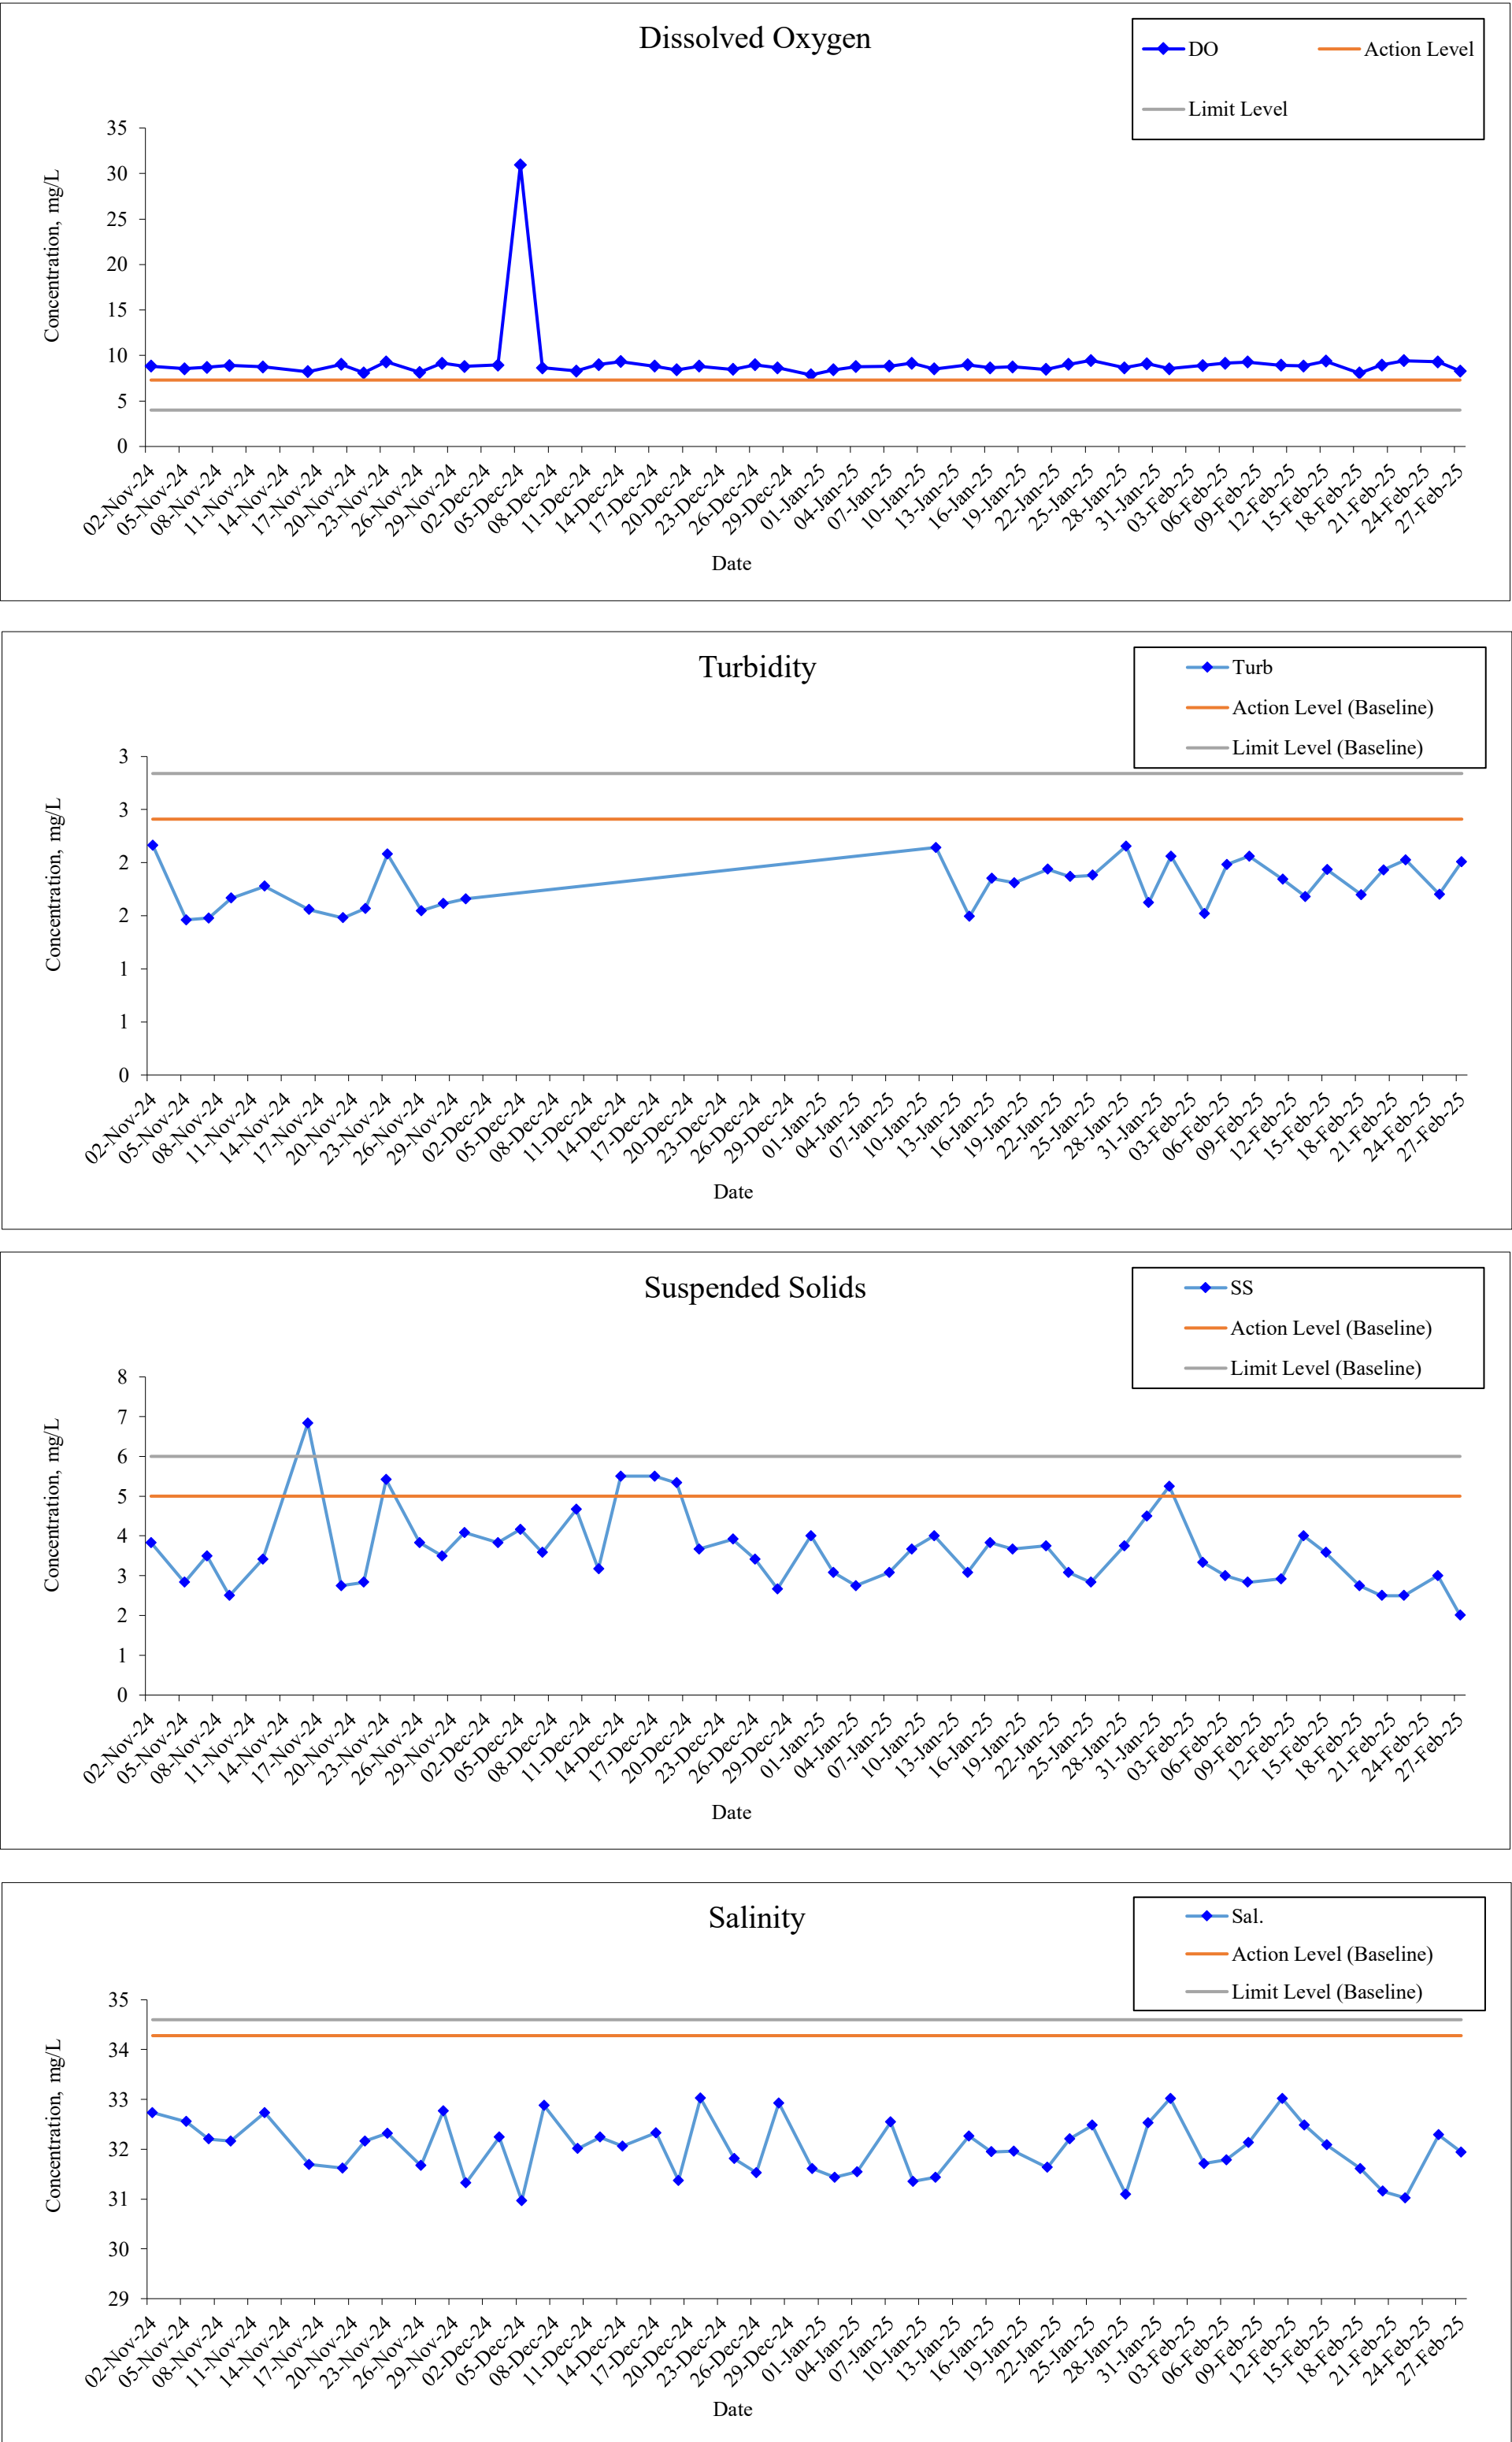

Monitoring Location: NF3

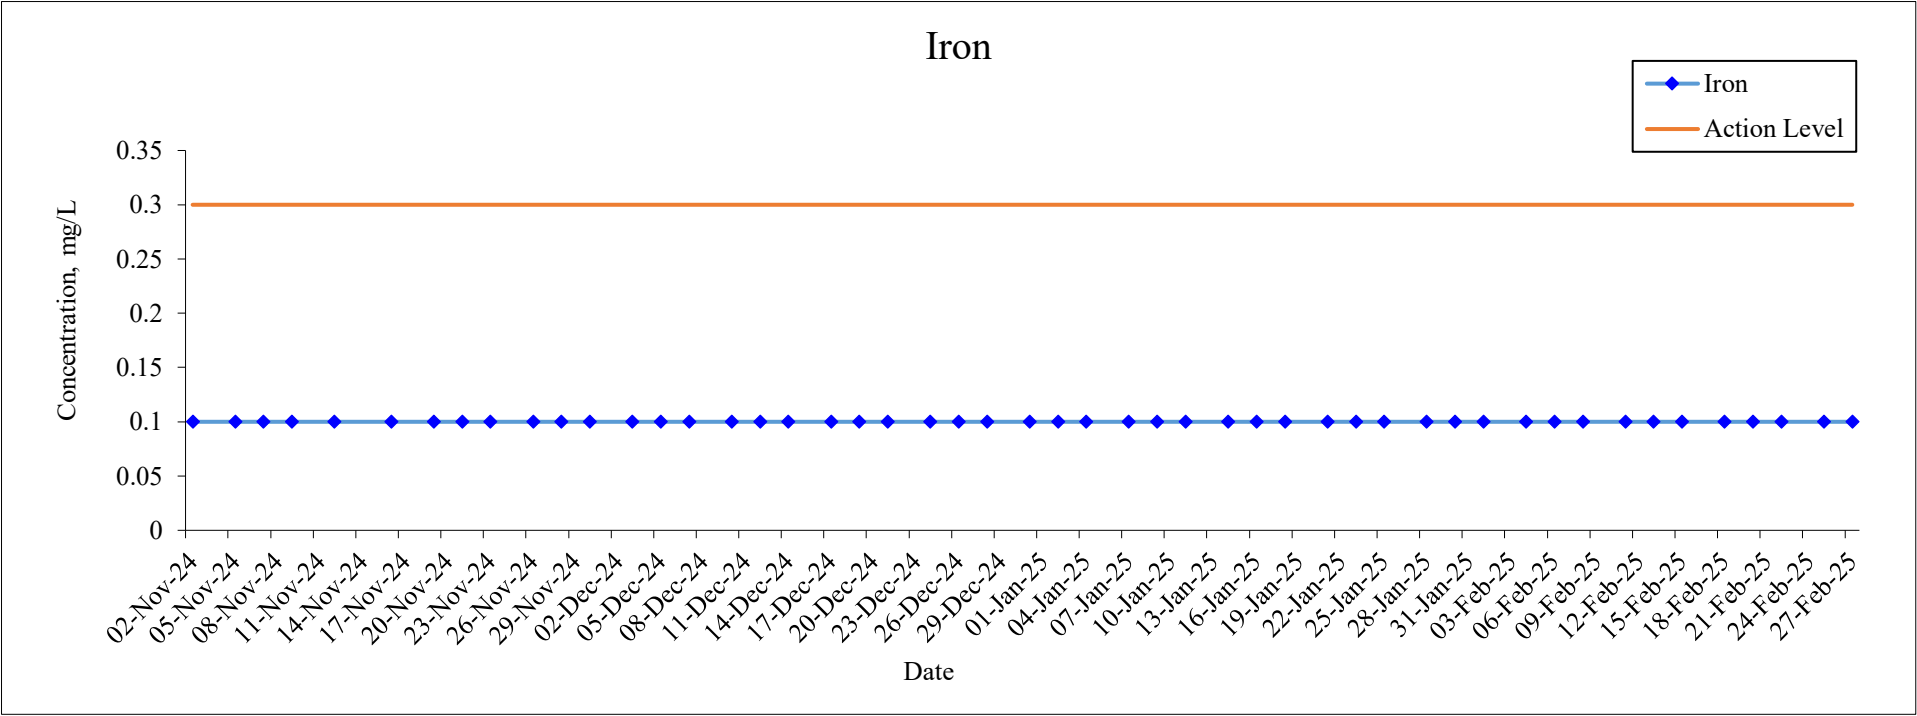

Remark: The lowest detection limit of the Iron is 0.1mg/L. All result of iron monitoring are lower than the detection limit.

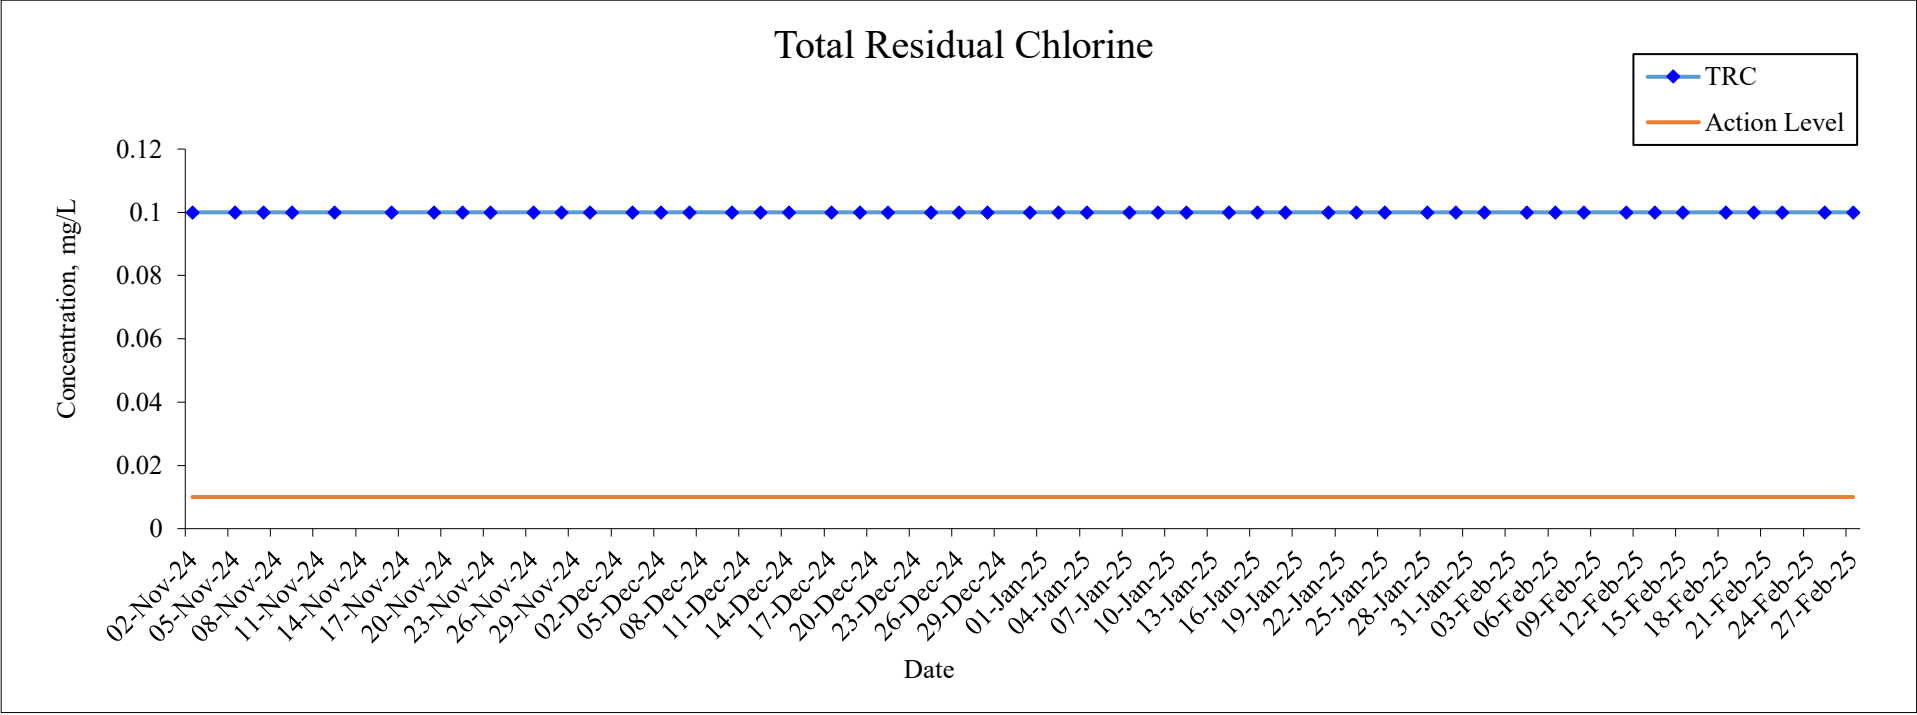

Remark: The lowest detection limit of the Total Residual Chlorine is 0.01mg/L. All result of Total Residual Chlorine monitoring are lower than the detection limit.

Appendix D.1

Weather Condition

Daily Extract of Meteorological Observations , December 2024

Back

Year2024

Month12

Go

Day	Hong Kong Observatory								King's Park	Waglan Island [^]	
	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)							
01	1015.0	22.7	19.7	17.6	13.7	69	54	0.0	9.7	070	13.6
02	1015.1	23.8	21.0	18.8	14.6	68	34	0.0	9.7	040	16.3
03	1015.7	24.9	21.9	19.7	17.1	74	32	0.0	9.4	050	21.1
04	1016.3	23.9	22.2	21.4	17.0	73	59	0.0	8.7	070	35.1
05	1016.4	23.3	21.7	20.7	17.3	76	54	0.0	4.2	070	23.0
06	1016.6	23.3	21.4	20.2	15.8	71	52	0.0	6.2	070	19.1
07	1018.2	23.3	20.7	17.9	14.1	66	29	0.0	9.5	360	25.5
08	1020.9	21.6	18.3	16.0	11.7	65	54	0.0	6.6	360	29.7
09	1019.6	20.2	18.7	17.1	13.0	70	75	0.0	2.3	020	21.5
10	1016.5	22.4	20.6	19.2	15.6	73	85	0.0	6.0	070	27.1
11	1016.4	25.2	22.3	20.0	16.9	72	68	0.0	5.6	060	17.9
12	1018.3	22.0	19.5	17.1	12.7	65	67	0.0	7.8	360	25.1
13	1020.2	20.7	18.5	15.6	10.3	59	67	0.0	4.7	360	32.9
14	1024.7	17.3	15.5	13.8	4.8	49	81	0.0	7.7	360	40.5
15	1025.2	17.0	14.8	13.0	1.3	40	87	Trace	3.9	360	28.7
16	1022.7	18.7	16.3	14.4	3.8	44	67	0.0	4.9	360	19.2
17	1021.0	20.4	17.9	15.5	9.2	58	27	0.0	9.5	060	16.5
18	1021.0	20.9	18.6	16.6	6.2	45	58	0.0	4.5	360	21.5
19	1022.7	18.1	15.6	13.7	2.1	40	8	0.0	9.3	360	28.3
20	1020.6	17.7	14.9	11.9	2.9	45	6	0.0	9.4	360	17.8
21	1020.0	20.2	16.9	13.9	3.8	42	14	0.0	9.4	360	24.6
22	1021.4	18.0	15.8	13.5	4.9	48	67	0.0	7.8	360	26.9
23	1020.6	17.5	16.5	15.1	7.8	57	88	0.0	0.0	060	26.9
24	1021.2	19.1	17.4	15.6	8.2	55	88	0.0	1.4	040	26.0
25	1021.1	20.6	18.5	16.6	13.0	71	88	Trace	4.0	010	23.2
26	1021.6	22.9	20.1	18.0	15.2	74	86	0.0	2.6	010	15.5
27	1023.1	20.9	19.2	18.1	14.6	75	68	0.0	1.4	070	25.1
28	1024.9	18.8	16.9	15.1	4.3	43	31	0.0	7.7	360	33.7
29	1023.4	17.4	15.4	13.3	6.9	57	15	0.0	8.6	070	27.6
30	1021.2	20.4	17.7	14.3	10.4	63	13	0.0	9.3	040	10.6
31	1019.1	22.6	19.8	17.6	10.3	55	54	Trace	7.7	350	14.8
Mean/Total	1020.0	20.8	18.5	16.5	10.3	60	54	Trace	199.5	360	23.7
Climatological Normal [?]	1020.1	20.4	18.2	16.2	12.4	70	57	28.8	161.6	010	26.4

[^] Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since August 1989

Trace means rainfall less than 0.05 mm

? 1991-2020 Climatological Normal, unless otherwise specified

Daily Extract of Meteorological Observations , January 2025

Back Year 2025 Month 1 Go

Day	Hong Kong Observatory								King's Park	Waglan Island [^]	
	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)							
01	1018.4	19.1	17.8	16.7	12.9	73	88	Trace	0.1	070	27.6
02	1018.3	22.0	19.1	16.9	13.2	69	87	0.0	2.6	050	15.5
03	1019.8	21.1	18.8	17.1	5.1	42	10	0.0	9.6	360	20.3
04	1020.5	19.7	17.6	15.9	11.0	66	50	Trace	8.2	070	29.6
05	1019.5	21.7	18.8	17.1	11.0	62	63	Trace	6.1	050	7.7
06	1018.9	21.5	18.2	15.7	8.0	52	4	0.0	9.6	360	15.5
07	1019.8	19.1	17.3	15.9	10.6	65	58	0.0	7.2	070	30.5
08	1020.0	20.6	17.8	16.6	11.4	67	54	0.0	5.6	050	25.7
09	1022.1	20.3	17.7	15.8	11.1	66	21	0.0	9.6	060	20.6
10	1027.7	17.5	15.1	12.7	3.3	45	15	0.0	9.6	360	28.4
11	1029.1	16.6	14.0	11.5	1.4	43	12	0.0	9.6	360	29.3
12	1026.1	18.2	14.5	11.0	0.9	41	7	0.0	9.8	360	23.0
13	1023.1	18.7	16.2	13.9	6.8	55	45	0.0	8.9	060	30.5
14	1021.9	20.2	18.2	16.2	9.4	57	89	0.0	0.1	050	26.8
15	1023.6	22.3	19.5	17.2	8.0	49	45	Trace	9.1	040	21.5
16	1024.9	18.3	16.2	14.1	5.2	48	1	0.0	9.6	360	16.0
17	1022.9	18.6	15.5	12.9	5.4	53	7	0.0	9.9	050	21.5
18	1019.7	19.5	16.2	14.2	8.0	59	20	0.0	9.9	050	20.5
19	1016.6	21.6	17.2	14.3	8.9	60	9	0.0	10.0	020	4.3
20	1016.3	20.9	17.8	15.4	9.3	59	6	0.0	9.9	040	13.8
21	1017.2	20.0	17.4	15.9	8.8	59	56	0.6	5.4	060	31.0
22	1017.4	21.4	18.6	17.3	12.2	67	86	1.0	3.5	050	25.3
23	1016.2	21.7	19.2	17.7	15.7	80	85	1.2	1.5	060	14.7
24	1015.2	20.8	18.5	17.1	13.3	72	49	0.0	9.9	060	28.8
25	1016.5	20.0	17.9	16.8	13.7	77	59	Trace	6.1	050	34.1
26	1020.9	17.5	15.2	12.2	10.1	72	82	0.2	0.0	360	38.2
27	1022.1	17.3	13.9	10.6	0.1	40	36	0.0	10.3	360	32.0
28	1024.4	19.1	15.1	11.8	1.1	40	30	0.0	9.9	360	18.8
29	1024.2	18.5	15.8	14.3	6.0	54	69	0.0	8.5	070	29.8
30	1019.9	18.4	16.4	14.5	10.0	66	51	0.0	8.9	050	32.8
31	1015.9	20.4	18.1	16.8	10.7	63	80	1.2	3.3	050	27.3
Mean/Total	1020.6	19.8	17.1	15.0	8.5	59	44	4.2	222.3	060	23.9
Climatological Normal [?]	1020.1	18.7	16.5	14.6	11.7	74	62	33.2	145.8	060	25.1

[^] Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since August 1989

Trace means rainfall less than 0.05 mm

[?] 1991-2020 Climatological Normal, unless otherwise specified

Day	Hong Kong Observatory								King's Park	Waglan Island^	
	Mean Pressure (hPa)	Air Temperature			Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
		Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)							
01	1013.1	21.9	19.5	17.2	17.0	86	88	1.7	3.0	040	14.0
02	1014.3	20.1	18.5	17.5	16.0	86	89	Trace	0.4	040	24.4
03	1019.6	17.8	15.8	13.1	11.0	74	85	0.1	1.2	360	30.0
04	1022.2	18.6	14.7	12.2	7.1	61	48	0.0	8.2	360	24.2
05	1019.4	18.5	15.7	13.6	9.0	65	54	0.0	7.0	050	26.3
06	1017.9	20.1	17.4	15.9	8.7	57	87	0.0	2.2	050	25.7
07	1021.4	17.7	15.5	12.7	8.4	63	88	0.0	0.0	360	32.2
08	1024.6	17.2	14.0	11.5	1.5	43	82	0.0	4.1	360	29.3
09	1024.0	17.4	14.5	11.8	2.6	46	32	0.0	10.4	080	25.7
10	1021.7	19.1	15.9	12.8	8.6	63	41	0.0	9.7	050	27.9
11	1019.1	19.9	17.6	15.2	12.2	71	78	Trace	4.4	040	26.1
12	1017.2	20.3	18.8	17.2	17.7	93	93	23.8	0.0	030	14.0
13	1018.9	19.6	18.1	16.9	14.4	79	86	Trace	0.3	070	28.7
14	1017.9	18.2	16.8	15.5	14.5	87	91	0.2	0.7	070	24.0
15	1015.6	22.3	18.5	16.7	15.5	83	56	Trace	5.2	040	11.8
16	1016.9	25.1	21.0	17.8	17.4	81	41	0.0	8.6	100	5.4
17	1020.6	21.9	18.9	17.3	13.1	70	42	0.0	10.0	070	31.9
18	1021.7	20.4	18.0	16.7	12.6	71	50	0.0	8.7	070	33.5
19	1021.9	18.7	17.2	16.1	12.6	75	86	0.0	0.5	070	32.7
20	1021.2	19.8	17.7	16.6	14.0	79	85	0.0	1.2	060	31.5
21	1022.4	19.4	17.1	16.3	14.1	82	83	Trace	2.1	060	27.3
22	1023.2	18.1	16.6	15.5	13.0	80	88	Trace	0.1	060	34.5
23	1026.0	18.8	16.8	15.4	11.9	73	89	Trace	0.8	010	27.6
24	1028.2	19.5	15.4	13.0	9.4	67	69	0.0	5.6	360	30.5
25	1026.1	19.6	16.9	14.4	11.4	70	88	Trace	0.2	060	22.0
26	1022.9	20.7	17.8	16.1	13.6	76	88	0.3	0.7	060	16.0
27	1019.0	22.2	18.7	16.1	14.3	76	53	0.0	8.7	050	19.3
28	1017.3	25.4	21.3	18.1	16.9	77	55	0.0	9.1	030	12.6
Mean/Total	1020.5	19.9	17.3	15.3	12.1	73	72	26.1	113.1	060	24.6
Climatological Normal?	1018.7	19.4	17.1	15.3	13.2	79	72	38.9	101.7	060	24.2

^ Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since August 1989

Trace means rainfall less than 0.05 mm

? 1991-2020 Climatological Normal, unless otherwise specified

Appendix D.2

Other Factor Might Affect the Monitoring Results

Other Factors might affect the monitoring results			
Reporting Period			
Nov 2024	Dec 2024	Jan 2025	Feb 2025
N/A	N/A	N/A	N/A

Appendix E

Summary of Exceedances

Table E1 Summary of Exceedance in Dec 2024

Date of exceedance	Monitoring Station	Tide	SS Level (mg/L)	Action Level	Limit Level
03/12/2024	WSR1	Flood	5.17	Y	N
	WSR2	Flood	6.17	Y	N
	WSR3	Flood	5.17	Y	N
	WSR4	Flood	5.17	Y	N
	WSR36	Flood	6.00	Y	N
	WSR37	Flood	7.33	Y	Y
05/12/2024	WSR16	Flood	5.83	Y	Y
	WSR33	Flood	6.00	Y	Y
	WSR37	Flood	5.50	Y	N
10/12/2024	WSR2	Ebb	6.00	Y	Y
	WSR33	Ebb	5.83	Y	Y
	WSR37	Ebb	5.17	Y	Y
	NF2	Ebb	6.17	Y	Y
17/12/2024	NF1	Ebb	6.83	Y	N
19/12/2024	WSR1	Ebb	5.83	Y	Y
	WSR2	Ebb	5.33	Y	Y
	NF2	Ebb	5.67	Y	Y
	NF3	Ebb	5.33	Y	Y
21/12/2024	WSR2	Flood	5.50	Y	Y
	WSR4	Flood	5.50	Y	Y
	WSR33	Flood	5.50	Y	Y
	NF1	Flood	4.58	Y	N
26/12/2024	WSR1	Flood	3.67	Y	Y
	WSR2	Flood	4.00	Y	Y
	WSR4	Flood	3.50	Y	Y
	WSR33	Flood	3.42	Y	Y
	WSR37	Flood	3.67	Y	Y
	NF1	Flood	3.25	Y	Y
	NF2	Flood	3.83	Y	Y
	NF3	Flood	3.42	Y	Y
28/12/2024	WSR2	Flood	3.58	Y	Y
	WSR4	Flood	3.33	Y	N
	WSR16	Flood	3.83	Y	Y
	WSR33	Flood	4.25	Y	Y
	WSR37	Flood	4.08	Y	Y
31/12/2024	WSR3	Ebb	3.67	Y	N
	WSR4	Ebb	3.58	Y	N
	WSR16	Ebb	3.75	Y	N
	NF1	Ebb	3.58	Y	N
	NF3	Ebb	4.00	Y	Y

Table E2 Summary of Exceedance in Jan 2025

Date	Station	Tide	SS Level (mg/L)	Action Level	Limit Level
02/1/2025	WSR2	Flood	3.58	Y	N
	WSR3	Flood	4.17	Y	N
	WSR4	Flood	3.33	Y	N
	WSR16	Flood	3.92	Y	N
	WSR37	Flood	4.83	Y	N
04/1/2025	WSR1	Flood	4.17	Y	N
	WSR2	Flood	4.33	Y	N
	WSR33	Flood	3.67	Y	N
	WSR36	Flood	4.17	Y	N
	WSR37	Flood	3.83	Y	N
07/1/2025	WSR1	Flood	4.08	Y	N
	WSR2	Flood	4.92	Y	N
11/1/2025	WSR1	Ebb	3.83	Y	N
	WSR4	Ebb	3.42	Y	N
	WSR33	Ebb	3.50	Y	N
	WSR36	Ebb	4.17	Y	N
	WSR37	Ebb	3.42	Y	N
	NF3	Ebb	4.00	Y	N
	WSR3	Flood	5.83	Y	N
14/1/2025	WSR4	Flood	6.00	Y	N
	WSR4	Flood	6.00	Y	N
18/1/2025	WSR4	Flood	4.67	Y	N
	NF1	Flood	3.92	Y	N
	NF2	Flood	3.83	Y	N
28/1/2025	WSR1	Flood	3.75	Y	N
	WSR2	Flood	3.75	Y	N
	WSR3	Flood	3.83	Y	N
	WSR36	Flood	6.00	Y	N
	NF3	Flood	3.75	Y	N
30/1/2025	WSR1	Flood	4.58	Y	N
	WSR3	Flood	4.58	Y	N
	WSR16	Flood	4.17	Y	N
	WSR33	Flood	6.00	Y	N
	WSR36	Flood	4.08	Y	N
	WSR37	Flood	4.50	Y	N
	NF1	Flood	5.83	Y	N
	NF2	Flood	8.00	Y	N
	NF3	Flood	4.50	Y	N

Table E3 Summary of Exceedance in Feb 2025

Date of exceedance	Monitoring Station	Tide	SS Level (mg/L)	Action Level	Limit Level
01/2/2025	NF3	Flood	5.25	Y	Y
08/2/2025	WSR1	Flood	5.25	Y	Y
	WSR2	Flood	4.00	Y	N
	WSR4	Flood	4.00	Y	N
	WSR16	Flood	4.33	Y	Y
	WSR36	Flood	4.92	Y	Y
	WSR37	Flood	4.75	Y	Y
	NF2	Flood	5.08	Y	Y
13/2/2025	WSR2	Flood	4.08	Y	N
	WSR3	Flood	4.67	Y	Y
	WSR4	Flood	4.17	Y	N
	WSR16	Flood	4.00	Y	N
	WSR37	Flood	4.17	Y	N
	NF2	Flood	4.00	Y	N
	NF3	Flood	4.00	N	N
15/2/2025	WSR1	Flood	4.92	Y	Y
	WSR37	Flood	4.58	Y	Y
	NF2	Flood	5.50	Y	Y
18/2/2025	WSR4	Flood	3.00	Y	N
25/2/2025	WSR1	ebb	3.17	Y	N
	WSR2	ebb	3.33	Y	N
	WSR16	ebb	3.58	Y	Y
	WSR37	ebb	3.17	Y	N
	NF2	ebb	4.25	Y	Y
27/2/2025	WSR1	ebb	3.42	Y	N
	WSR3	ebb	4.58	Y	Y
	WSR4	ebb	3.92	Y	Y
	WSR16	ebb	4.75	Y	Y
	WSR33	ebb	3.67	Y	Y
	WSR36	ebb	4.25	Y	Y
	NF1	ebb	3.25	Y	Y
	NF3	ebb	3.67	Y	Y

Appendix F

Waste Flow Table

Appendix F - Monthly Summary Waste Flow Table

Name of Department: WSD

Contract No.: 13/WSD/17

Monthly Summary Waste Flow Table for 2024 (year)

W

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)
Jan	4978.345	0.000	0.000	4667.745	310.600	0.000	0.000	0.000	0.000	0.000	77.800
Feb	22561.796	0.000	0.000	21883.006	678.790	0.000	0.000	0.000	0.000	0.000	53.480
Mar	81.140	0.000	0.000	0.000	81.140	0.000	0.000	0.000	0.000	0.000	52.260
Apr	57.130	0.000	0.000	0.000	57.130	0.000	0.000	0.000	0.000	0.000	47.390
May	91.370	0.000	0.000	0.000	91.370	0.000	0.000	0.000	0.000	0.000	77.260
Jun	61.590	0.000	0.000	0.000	61.590	0.000	0.000	0.000	0.002	0.000	59.320
Sub-total	27831.371	0.000	0.000	26550.751	1280.620	0.000	0.000	0.000	0.002	0.000	367.510
Jul	60378.440	0.000	0.000	0.000	60378.440	0.000	0.000	0.000	0.000	0.000	66.800
Aug	163.330	0.000	0.000	0.000	163.330	0.000	0.000	0.000	0.000	2.460	42.260
Sep	834.890	0.000	0.000	0.000	834.890	0.000	0.000	0.000	0.000	0.805	27.020
Oct	78.140	0.000	0.000	0.000	78.140	0.000	0.000	0.000	0.000	0.000	71.810
Nov	237.790	0.000	0.000	0.000	237.790	0.000	0.000	0.000	0.000	0.000	62.300
Dec	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	1.000	31.470
Total	89523.961	0.000	0.000	26550.751	62973.210	0.000	0.000	0.000	0.002	4.265	669.170

Notes:

- (1) The performance targets are given in Section 1.69 of Specification B
- (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/ foam from packaging material

Name of Department: WSD

Contract No.: 13/WSD/17

Monthly Summary Waste Flow Table for 2025 (year)

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)
Jan	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	38.740
Feb	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	18.330
Mar											
Apr											
May											
Jun											
Sub-total	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	57.070
Jul											
Aug											
Sep											
Oct											
Nov											
Dec											
Total	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	57.070

Notes:

- (1) The performance targets are given in Section 1.69 of Specification B
- (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/ foam from packaging material

Appendix G

Complaint Log

Table G1 Statistical Summary of Environmental Complaints

Reporting Period	Environmental Complaint Statistics		
	Frequency	Cumulative	Complaint Nature
1 December 2024 - 28 February 2025	0	2	N/A

Table G2 Statistical Summary of Environmental Summons

Reporting Period	Environmental Summons Statistics		
	Frequency	Cumulative	Details
1 December 2024 - 28 February 2025	0	0	N/A

Table G3 Statistical Summary of Environmental Prosecution

Reporting Period	Environmental Prosecution Statistics		
	Frequency	Cumulative	Details
1 December 2024 - 28 February 2025	0	0	N/A

Appendix H

Event/ Action Plan for Water Quality Exceedance

Contract No. 13/WSD/17
Design, Build and Operate First Stage of
Tseung Kwan O Desalination Plant
Quarterly EM&A Report

Table H1 Event and Action Plan for Water Quality Monitoring

Event	Action ET	IEC	Contractor(s)	ER
Action Level being exceeded by one sampling day	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER.	1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice	1. Confirm receipt of notification of exceedance in writing.
Action Level being exceeded by two or more consecutive sampling days	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER; 5. Discuss with IEC and Contractor(s) on additional mitigation measures and ensure that they are implemented	1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD; 3. Discuss with ET and Contractor(s) on additional mitigation measures and advise ER accordingly; 4. Assess the effectiveness of the implemented mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice; 3. Consider changes of working methods; 4. Discuss with ET and IEC on additional mitigation measures and propose them to ER within 3 working days; 5. Implement the agreed mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Discuss with the IEC on the proposed additional mitigation measures and agree on the mitigation measures to be implemented. 3. Ensure additional mitigation measures are properly implemented.
Limit Level being exceeded by one sampling day	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER; 5. Discuss with IEC and Contractor(s) on additional mitigation measures and ensure that they are implemented	1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD; 3. Discuss with ET and Contractor(s) on additional mitigation measures and advise ER accordingly; 4. Assess the effectiveness of the implemented mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice; 3. Critically review the need to change working methods; 4. Discuss with ET and IEC on additional mitigation measures and propose them to ER within 3 working days; 5. Implement the agreed mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Discuss with the IEC on the proposed additional mitigation measures and agree on the mitigation measures to be implemented. 3. Ensure additional mitigation measures are properly implemented. 4. Request Contractor(s) to critically review the working methods.
Limit Level being exceeded by two or more consecutive sampling days	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER; 5. Discuss with IEC and Contractor(s) on additional mitigation measures and ensure that they are implemented	1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD; 3. Discuss with ET and Contractor(s) on additional mitigation measures and advise ER accordingly; 4. Assess the effectiveness of the implemented mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice; 3. Critically review the need to change working methods; 4. Discuss with ET and IEC on additional mitigation measures and propose them to ER within 3 working days; 5. Implement the agreed mitigation measures. 6. As directed by ER, slow down or stop all or part of the marine construction works/ production volume of the desalination plant until no exceedance of Limit Level.	1. Confirm receipt of notification of exceedance in writing; 2. Discuss with the IEC on the proposed additional mitigation measures and agree on the mitigation measures to be implemented. 3. Ensure additional mitigation measures are properly implemented. 4. Request Contractor(s) to critically review the working methods; 5. Consider and instruct, if necessary, the Contractor(s) to slow down or to stop all or part of the marine construction works/ production volume of the desalination plant until no exceedance of Limit Level.

Notes : ET = Environmental Team, IEC = Independent Environmental Checker; ER = Engineering Representatives
The above actions should be taken within 1 working day after the exceedance is identified during operation phase.

Appendix I

Event/ Action Plan for Construction Noise Exceedance

Table I1 Event and Action Plan for Construction Noise Monitoring

Event	Action			
	ET	IEC	ER	Contractor
Action Level	1. Carry out investigation to identify the source and cause of the complaint/ exceedance(s) 2. Notify IEC, ER, and Contractor and report the results of investigation to the Contractor; ER and the IEC 3. Discuss with the Contractor and IEC for remedial measures required 4. If the complaint is related to the Project, conduct additional monitoring for checking mitigation effectiveness and report the findings and results to the IEC, ER and the Contractor	1. Review the analyzed results submitted by the ET 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly 3. Supervise the implementation of remedial measures	1. Confirm receipt of Notification of Exceedance in writing 2. Require Contractor to propose remedial measures for the analysed noise problem 3. Ensure remedial measures are properly implemented	1. Submit noise mitigation proposals, if required, to the IEC and ER 2. Implement noise mitigation proposals.
Limit Level	1. Carry out investigation to identify the source and cause of the exceedance 2. Notify IEC, ER, Project Proponent, EPD and Contractor 3. Repeat measurements to confirm findings 4. Provide investigation report to IEC, ER, EPD and Contractor he causes of the exceedances 5. If the exceedance is related to the Project, assess effectiveness by additional monitoring. 6. Report the remedial action implemented and the additional monitoring results to IEC, EPD, ER and Contractor 7. If exceedance stops, cease additional monitoring	1. Review the analyzed results submitted by the ET 2. Discuss the potential remedial measures with ER, ET Leader and Contractor 3. Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly 4. Supervise the implementation of remedial measures	1. Confirm receipt of Notification of Exceedance in writing 2. Require the Contractor to propose remedial measures for the analysed noise problem 3. Ensure remedial measures are properly implemented 4. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor, in agreement with the Project Proponent, to stop that activity of work until the exceedance is abated	1. Take immediate action to avoid further exceedance 2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification 3. Implement the agreed proposals 4. Resubmit proposals if problem still not under control 5. Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated

Notes : ET = Environmental Team, IEC = Independent Environmental Checker; ER = Engineering Representatives

Appendix J

Event/ Action Plan for Coral Monitoring Exceedance

Table J1 Event and Action Plan for Coral Monitoring

Event	Action			
	ET Leader	IEC	SOR **	Contractor
Action Level Exceedance	1. Check monitoring data 2. Inform the IEC, SOR and Contractor of the findings; 3. Increase the monitoring to at least once a month to confirm findings; 4. Propose mitigation measures for consideration	1. Discuss monitoring with the ET and the Contractor; 2. Review proposals for additional monitoring and any other measures submitted by the Contractor and advise the SOR accordingly.	1. Discuss with the IEC additional monitoring requirements and any other measures proposed by the ET; 2. Make agreement on the measures to be implemented.	1. Inform the SOR and confirm notification of the non-compliance in writing; 2. Discuss with the ET and the IEC and propose measures to the IEC and the SOR; 3. Implement the agreed measures.
Limit Level Exceedance	1. Undertake Steps 1-4 as in the Action Level Exceedance. If further exceedance of Limit Level, propose enhancement measures for consideration.	1. Discuss monitoring with the ET and the Contractor; 2. Review proposals for additional monitoring and any other measures submitted by the Contractor and advise the SOR accordingly.	1. Discuss with the IEC additional monitoring requirements and any other measures proposed by the ET; 2. Make agreement on the measures to be implemented.	1. Inform the SOR and confirm notification of the non-compliance in writing; 2. Discuss with the ET and the IEC and propose measures to the IEC and the SOR; 3. Implement the agreed measures.

Remark: ** The "SOR" is equivalent to the "ER" as defined in the EM&A Manual of the Project