



Water Supplies Department
New Works Branch
Consultants Management Division
6/F Sha Tin Government Offices
1 Sheung Wo Che Road
Sha Tin
New Territories

Your reference:

Our reference: HKWSD202/50/108116

Date: 18 July 2022

Attention: Mr Sam Hui/ Mr H L Lai

BY EMAIL & POST
**(email: wl_hui@wsd.gov.hk/
jack_hl_lai@wsd.gov.hk)**

Dear Sirs

Agreement No. CE 5/2019 (EP)
Independent Environmental Checker for First Stage of
Tseung Kwan O Desalination Plant – Investigation
Verification of Monthly EM&A Report No.28 (June 2022)

We refer to emails of 11 and 15 July 2022 attaching Monthly EM&A Report No.28 (June 2022) for the captioned project prepared by the ET.

We have no further comments and hereby verify the captioned report in accordance with Clause 3.5 of the Environmental Permit no. EP-503/2015/A and Further Environmental Permit no. FEP-01/503/2015/A.

Should you have any queries regarding the above, please do not hesitate to contact the undersigned on 2618 2831.

Yours faithfully
ANewR CONSULTING LIMITED

Louis Kwan
Independent Environmental Checker

KSYL/lsm

ANewR Consulting Limited
Unit 517, 5/F, Tower A, Regent Centre
63 Wo Yi Hop Road, Kwai Chung, Hong Kong
Tel: (852) 2618 2831 Fax: (852) 3007 8648
Email: info@anewr.com
Web: www.anewr.com





Contract No. 13/WSD/17

**Design, Build and Operate First Stage of Tseung Kwan O
Desalination Plant**

**Monthly EM&A Report No.28
(Period from 1 June to 30 June 2022)**

Document No.

ASCL	/	200168078	/	MEMAR28	/	A
Publisher		Project Code		Sequential No.		Revision Index

	Prepared by:	Reviewed and Certified by:
Name	Howard CHAN	Jacky LEUNG
Position	Environmental Team Member	Environmental Team Leader
Signature		
Date:	15/07/2022	15/07/2022

REVISION HISTORY

REV.	DESCRIPTION OF MODIFICATION	DATE
A	First Issue for Comments	11 July 2022

CONTENTS

Executive Summary	1
1. Basic Contract Information.....	5
2. Noise.....	9
3. Water Quality.....	15
4. Waste.....	26
5. Landfill Gas Monitoring.....	27
6. Summary of Exceedance, Complaints, Notification of Summons and Prosecutions	31
7. EM&A Site Inspection.....	33
8. Future Key Issues.....	34
9. Conclusions and Recommendations	36
Appendix A	Master Programme
Appendix B	Overview of Desalination Plant in Tseung Kwan O
Appendix C	Summary of Implementation Status of Environmental Mitigation
Appendix D	Impact Monitoring Schedule of the Reporting Month
Appendix E	Event/Action Plan for Noise Exceedance
Appendix F	Noise Monitoring Equipment Calibration Certificate (Blank)
Appendix G	Event/Action Plan for Water Quality Exceedance
Appendix H	Waste Flow Table
Appendix I	Site Inspection Proforma
Appendix J	Complaint Log
Appendix K	Impact Monitoring Schedule of Next Reporting Month
Appendix L	Water Quality and Landfill Gas Monitoring Data
Appendix M	HOKLAS Laboratory Certificate
Appendix N	Water Quality and Landfill Gas Equipment Calibration Certificate
Appendix O	Exceedance Report(s)

EXECUTIVE SUMMARY

INTRODUCTION

- A1. The Project, Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant (TKODP), is a Designated Project under the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO) and is currently governed by a Further Environmental Permit (EP No. FEP – 01/503/2015/A) for the construction and operation of the Contract.
- A2. In accordance with the Environmental Monitoring and Audit (EM&A) Manual for the Contract, EM&A works for marine water quality, noise, waste management and ecology should be carried out by Environmental Team (ET), Acuity Sustainability Consulting Limited (ASCL), during the construction phase of the Contract.
- A3. This is the 28th Monthly EM&A Report, prepared by ASCL, for the Contract summarizing the monitoring results and audit findings of the EM&A programme at and around Tseung Kwan O Area 137 (TKO 137) during the reporting period from 1 June 2022 to 30 June 2022.
- A4. The EM&A programme for this contract has covered environmental monitoring on construction noise level at selected NSRs and Contractor’s environmental performance auditing in the aspects of construction dust, construction noise, water quality, waste management, Landscape and Visual and Ecology.

SUMMARY OF MAIN WORKS UNDERTAKEN & KEY MITIGATION MEASURES IMPLEMENTED

- A5. Key activities carried out in this reporting period for the Contract included the followings:
- 132kV adjacent underground utility construction
 - Construction of Reverse Osmosis (RO) Building - staircases and internal finishing;
 - Construction of sludge thickener, Post Treatment Building (PTB);
 - Internal finishing work for On-Site Chlorine Generation Building (OSCG Bldg) and Product Water Storage Tank (PWST), Main Electrical & Central Chiller Plant Building;
 - Manhole construction and GRP pipe installation;
 - Design for Manufacture and Assembly at PWST and RO Building;
 - Installation of louvre, metal doors and timber doors in MECCP;
 - Construction of 3/F to 4/F walls and columns of Administration Building;
 - Installation of curtain wall supports of Administration Building;
 - Construction of columns and beams of FT-5, FT6, FT7 and FT-8 at Inspection Corridor;
 - Construction of Stair Tower at Inspection Corridor;
 - Construction of Side Tanks No. 5-8 at ActiDAFF;
 - Installation of GRP Casts in Media Chambers co. 9-16 at ActiDAFF;

- Carrying out of Finishing works in the Plant Room at Chemical Building;
- Installation of marine structure and Dewater at Outfall Shaft;
- Installation of marine intake structure at Intake Shaft;
- Permanent structure construction at Combined Shaft;
- Excavation at slope toe;
- Trench excavation and structure installation at Open Channel;
- E&M works – ActiDAFF – scaffolding, installation of mechanical equipment and piping;
- E&M works –RO Building – installation of building services, steel pipe, Glass fiber reinforced plastics pipe;
- E&M works – Product Water Building – installation of building services;
- E&M works – Post Treatment Building – installation of building services, mechanical equipment and piping; and
- E&M works – Administration Building - installation of building services

A6. The major environmental impacts brought by the above construction works include:

- Construction dust and noise generation from marine construction works, excavation works, construction works, rock cutting works and pipe piling driving works
- Waste generation from the construction activities; and
- Impact on water quality from marine construction works and inland construction works.

A7. The key environmental mitigation measures implemented for the Contract in this reporting period associated with the above construction works include:

- Dust suppression by regular wetting and water spraying for construction works;
- Reduction of noise from equipment and machinery on-site and regular inspection to machinery and plants/vehicles on-site to ensure proper functioning;
- Sorting and storage of general refuse and construction waste; and
- Deployment of temporary silt curtain in the area where marine construction works were conducted and deployment of water sedimentation tanks for treatment of wastewater at inland and marine areas before discharge.

SUMMARY OF EXCEEDANCE & INVESTIGATION & FOLLOW-UP

A8. No noise monitoring was conducted during the reporting period since there are no Contract -related construction activities undertaken within a radius of 300m from the monitoring locations. No exceedance of the Action Level was recorded during the reporting period.

A9. The EM&A works for water quality were conducted during the reporting period in accordance with the EM&A Manual.

- A10. Fourteen (14) of the general water quality monitoring results of suspended solids (SS) obtained had exceeded the Action Level. Nine (9) of the general water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level.
- A11. Details of the exceedance are presented in **Appendix O**.
- A12. Investigation on the reason of exceedance has been carried out, where the exceedances of SS on 7, 11, 13, 15, 17 and 28 June 2022 were concluded to be unrelated to the Contract as detailed in the Incident Reports on Action Level or Limit Level Non-compliance along with supporting materials in **Appendix O**.
- A13. It was concluded that all exceedances recorded in the reporting month were unrelated to the Contract.
- A14. In this reporting period, no landfill gas monitoring was conducted at Wan Po Road (Ch1+360 – Ch1+513).
- A15. Joint site inspections of the construction work by ET and IEC were carried out on 7, 14, 21 and 28 June 2022 to audit the mitigation measures implementation status. Recommendations were recorded in the site inspection checklists and provided to the contractors together with the appropriate follow-up actions where necessary.

COMPLAINT HANDLING AND PROSECUTION

- A16. No environmental complaint, notification of summons and prosecution was received during the reporting period.

REPORTING CHANGE

- A17. There was no change to be reported that may affect the on-going EM&A programme.

SUMMARY OF UPCOMING KEY ISSUES AND KEY MITIGATION MEASURES

- A18. Key activities anticipated in the next reporting period for the Contract will include the followings:
- 132kV adjacent underground utility construction
 - Construction of Reverse Osmosis (RO) Building - staircases and internal finishing;
 - Construction of sludge thickener, Post Treatment Building (PTB);
 - Internal finishing work for On-Site Chlorine Generation Building (OSCG Bldg) and Product Water Storage Tank (PWST), Main Electrical & Central Chiller Plant Building;
 - Manhole construction and GRP pipe installation;
 - Design for Manufacture and Assembly at PWST and RO Building;
 - Installation of louvre, metal doors and timber doors in MECCP;
 - Construction of 3/F to 4/F walls and columns of Administration Building;

- Installation of curtain wall supports of Administration Building;
- Construction of columns and beams of FT-5, FT6, FT7 and FT-8 at Inspection Corridor;
- Construction of Stair Tower at Inspection Corridor;
- Construction of Side Tanks No. 5-8 at ActiDAFF;
- Installation of GRP Casts in Media Chambers co. 9-16 at ActiDAFF;
- Carrying out of Finishing works in the Plant Room at Chemical Building;
- Installation of marine structure and Dewater at Outfall Shaft;
- Installation of marine intake structure at Intake Shaft;
- Permanent structure construction at Combined Shaft;
- Excavation at slope toe;
- Trench excavation and structure installation at Open Channel;
- E&M works – ActiDAFF – scaffolding, installation of mechanical equipment and piping;
- E&M works –RO Building – installation of building services, steel pipe, Glass fiber reinforced plastics pipe;
- E&M works – Product Water Building – installation of building services;
- E&M works – Post Treatment Building – installation of building services, mechanical equipment and piping; and
- E&M works – Administration Building - installation of building services

A19. The major environmental impacts brought by the above construction works will include:

- Construction dust and noise generation from pipe jacking works, excavation and construction works;
- Waste generation from construction activities; and
- Impact on water quality from marine construction works and inland construction works.

A20. The key environmental mitigation measures for the Contract in the coming reporting period associated with the above construction works will include:

- Reduction of noise from equipment and machinery on-site;
- Dust suppression by regular wetting and water spraying for construction works and at main haul road;
- Sorting and storage of general refuse and construction waste; and
- Deployment of temporary silt curtain in the area where marine construction works were conducted and deployment of water sedimentation tanks for treatment of wastewater at inland and marine areas before discharge.

1. BASIC CONTRACT INFORMATION

BACKGROUND

- 1.1. The Acciona Agua, S.A. Trading, Jardine Engineering Corporation, Limited and China State Construction Engineering (Hong Kong) Limited as AJC Joint Venture (AJCJV) is contracted to carry out the Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant (DPTKO) under Contract No. 13/WSD/17 (the Contract).
- 1.2. Acuity Sustainability Consulting Limited (ASCL) is commissioned by AJCJV to undertake the Environmental Team (ET) services as required and/or implied, both explicitly and implicitly, in the Environmental Permit (EP), Environmental Impact Assessment Report (EIA Report) (Register No. AEIAR-192/2015) and Environmental Monitoring and Audit Manual (EM&A Manual) for the Contract; and to carry out the Environmental Monitoring and Audit (EM&A) programme in fulfillment of the EIA Report's EM&A requirements and Contract No. 13/WSD/17 Specification requirements.
- 1.3. Pursuant to the Environmental Impact Assessment Ordinance (EIAO), the Director of Environmental Protection granted the Environmental Permit (No. EP-01/503/2015) and Variation of Environmental Permit (No. EP-01/503/2015/A) to Water Supplies Department (WSD); and granted the Further Environmental Permit (No. FEP-01/503/2015/A) to AJCJV for the Contract.

THE REPORTING SCOPE

- 1.4. This is the 28th Monthly EM&A Report for the Contract which summarizes the key findings of the EM&A programme during the reporting period from 1 June to 30 June 2022.

CONTRACT ORGANIZATION

- 1.5. The Contract Organization structure for Construction Phase is presented in **Figure 1.1**.

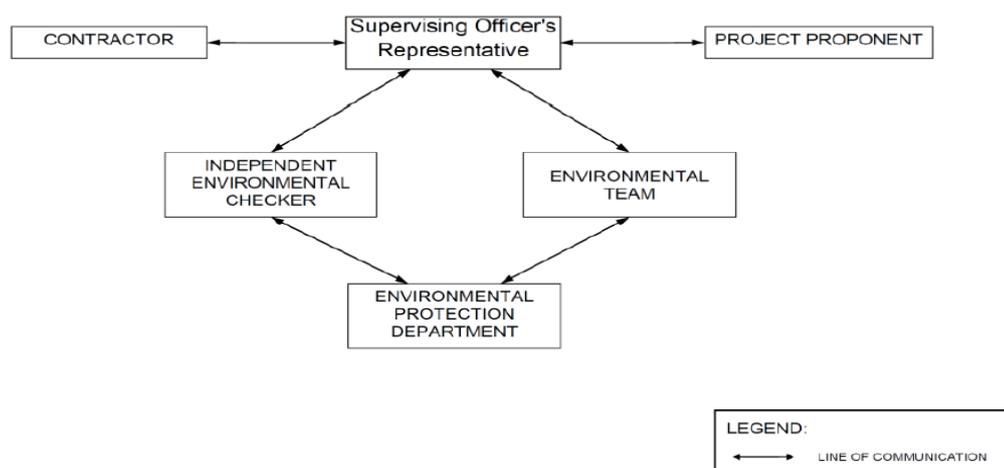


Figure 1.1 Contract Organization Chart

- 1.6. Contact details of the key personnel are presented in **Table 1.1** below:

Table 1.1 Contact Details of Key Personnel

Party	Position	Name	Telephone no.
Contract Proponent (Water Supplies Department)	SE/CM2	Benny Lam	2634-3573
Supervising Officer (Binnies Hong Kong Limited)	Project Manager	Christina Ko	2608-7302
	Chief Resident Engineer	Roger Wu	6343-1002
The Jardine Engineering Corporation, Limited, China State Construction Engineering (Hong Kong) Limited and Acciona Agua, S.A. Trading	Project Manager	Stephen Yeung	2807-4665
	Environmental Monitoring Manager	Brian Kam	9456-9541
Acuity Sustainability Consulting Limited	Environmental Team Leader	Jacky Leung	2698-6833
ANewR Consulting Limited	Independent Environmental Checker (IEC)	Louis Kwan	2618-2831

SUMMARY OF CONSTRUCTION WORKS

- 1.7. Details of the major construction activities undertaken in this reporting period are shown as below. The construction programme is presented in **Appendix A**.
- 1.8. Key activities carried out in this reporting period for the Contract included the followings:
- 132kV adjacent underground utility construction
 - Construction of Reverse Osmosis (RO) Building - staircases and internal finishing;
 - Construction of sludge thickener, Post Treatment Building (PTB);
 - Internal finishing work for On-Site Chlorine Generation Building (OSCG Bldg) and Product Water Storage Tank (PWST), Main Electrical & Central Chiller Plant Building;
 - Manhole construction and GRP pipe installation;
 - Design for Manufacture and Assembly at PWST and RO Building;
 - Installation of louvre, metal doors and timber doors in MECCP;
 - Construction of 3/F to 4/F walls and columns of Administration Building;
 - Installation of curtain wall supports of Administration Building;
 - Construction of columns and beams of FT-5, FT6, FT7 and FT-8 at Inspection Corridor;
 - Construction of Stair Tower at Inspection Corridor;

- Construction of Side Tanks No. 5-8 at ActiDAFF;
- Installation of GRP Casts in Media Chambers co. 9-16 at ActiDAFF;
- Carrying out of Finishing works in the Plant Room at Chemical Building;
- Installation of marine structure and Dewater at Outfall Shaft;
- Installation of marine intake structure at Intake Shaft;
- Permanent structure construction at Combined Shaft;
- Excavation at slope toe;
- Trench excavation and structure installation at Open Channel;
- E&M works – ActiDAFF – scaffolding, installation of mechanical equipment and piping;
- E&M works –RO Building – installation of building services, steel pipe, Glass fiber reinforced plastics pipe;
- E&M works – Product Water Building – installation of building services;
- E&M works – Post Treatment Building – installation of building services, mechanical equipment and piping; and
- E&M works – Administration Building - installation of building services
-

1.9. A summary of the valid permits, licences, and/or notifications on environmental protection for this Contract is presented in **Table 1.2**.

Table 1.2 Summary of the Status of Valid Environmental Licence, Notification, Permit and Documentations

Permit/ Licenses/ Notification	Reference	Validity Period
Environmental Permit	FEP – 01/503/2015/A	Throughout the Contract
Notification of Construction Works under the Air Pollution Control (Construction Dust) Regulation (Form NA)	Ref. No.: 451539	Throughout the Contract
Billing Account for Disposal of Construction Waste	7036276	Throughout the Contract
Chemical Waste Producer Registration	5213-839-A2987-01	Throughout the Contract
Wastewater Discharge Licence (Land and Marine works)	WT00035775-2020	23/08/2021 – 31/07/2025
Construction Noise Permit for general works, TBM at combined shaft and marine works	GW-RE0337-22	01/05/2022 – 31/10/2022
	GW-RE0627-22	29/06/2022 – 21/12/2022

1.10. The status for all environmental aspects is presented in **Table 1.3**.

Table 1.3 Summary of Status for Key Environmental Aspects under the EM&A Manual

Parameters	Status
Water Quality	
Baseline Monitoring under EM&A Manual	The baseline water quality monitoring was conducted between 12 May 2020 to 6 Jun 2020
Impact Monitoring	On-going
Noise	
Baseline Monitoring	The baseline noise monitoring result has been reported in Baseline Monitoring Report and submitted to EPD under EP Condition 3.4
Impact Monitoring	On-going
Waste Management	
Mitigation Measures in Waste Management Plan	On-going
Landfill Gas	
Regular Monitoring when Construction Works are within the 250m Consultation Zone	In this reporting period, no landfill gas monitoring was conducted at Wan Po Road (Ch1+360 - Ch1+513).
Environmental Audit	
Site Inspection covering Measures of Air Quality, Noise Impact, Water Quality, Waste, Ecological Quality, Fisheries, Landscape and Visual	On-going

- 1.11. Other than the EM&A work by ET, environmental briefings, trainings and regular environmental management meetings were conducted, in order to enhance environmental awareness and closely monitor the environmental performance of the contractors.
- 1.12. The EM&A programme has been implemented in accordance with the recommendations presented in the approved EIA Report and the EM&A Manual. A summary of implementation status of the environmental mitigation measures for the construction phase of the Contract during the reporting period is provided in **Appendix C**.

2. NOISE

MONITORING REQUIREMENTS

- 2.1. To ensure no adverse noise impact, noise monitoring is recommended to be carried out within 300m radius from the nearby noise sensitive receivers (NSRs), during construction phase. The NSRs selected as monitoring station are (i) NSR4 – Creative Secondary School, (ii) NSR24 – PLK Laws Foundation College, and (iii) NSR31 – School of Continuing and Professional Studies – CUHK respectively.
- 2.2. In accordance with the EM&A Manual, baseline noise level at the noise monitoring stations were established as presented in the Baseline Monitoring Report. Impact noise monitoring will be conducted once per week in the form of 30-minutes measurements L_{eq} , L_{10} and L_{90} levels recorded at each monitoring station between 0700 and 1900 on normal weekdays.
- 2.3. Referring to EM&A manual Section 4.1.2, the impact noise monitoring should be carried out at all the designated monitoring stations when there are contract-related construction activities undertaken within a radius of 300m from the monitoring stations.
- 2.4. No impact monitoring for noise impact was conducted in the reporting month due to the overly distant monitoring station from the works location, where they were farther than 1 km from the closest monitoring station NSR4 to the works location.
- 2.5. Impact noise monitoring will be conducted weekly in the reporting period between 0700-1900 on normal weekdays. Construction works would follow stipulations of the valid Construction Noise Permits if works had to be conducted during restricted hours or public holidays.
- 2.6. Construction noise level were measured in terms of the A-weighted equivalent continuous sound pressure level (L_{Aeq}). L_{eq} 30min was used as the monitoring parameter for the time period between 0700 and 1900 on normal weekdays. **Table 2.1** summarizes the monitoring parameters, frequency and duration of the impact noise monitoring.

Table 2.1 Noise Monitoring Parameters, Time, Frequency and Duration

Time	Duration	Interval	Parameters
Daytime: 0700-1900	Day time: 0700-1900 (during normal weekdays)	Continuously in L_{eq} 5min/ L_{eq} 30min (average of 6 consecutive L_{eq} 5min)	L_{eq} 30min L_{10} 30min & L_{90} 30min

MONITORING LOCATIONS

- 2.7. The monitoring locations were normally made at a point 1m from the exterior of the NSRs building façade and be at a position 1.2m above the ground. A correction of +3dB(A) should be made to the free-field measurements.
- 2.8. According to the environmental findings detailed in the EIA report and Baseline Monitoring Report, the designated locations for the construction noise monitoring are listed in **Table 2.2** below.

Table 2.2 Noise Sensitive Receivers

NSR ID	Noise Sensitive Receivers	Monitoring Location	Position
NSR 4	Creative Secondary School	Roof Floor	1 m from facade
NSR 24	PLK Laws Foundation College	Pedestrian Road on Ground Floor	Free-field
NSR 31	School of Continuing and Professional Studies - CUHK	Roof Floor	1 m from facade

- 2.9. Three noise monitoring locations for impact monitoring at the nearby sensitive receivers are shown in **Figure 2.1-2.3**.

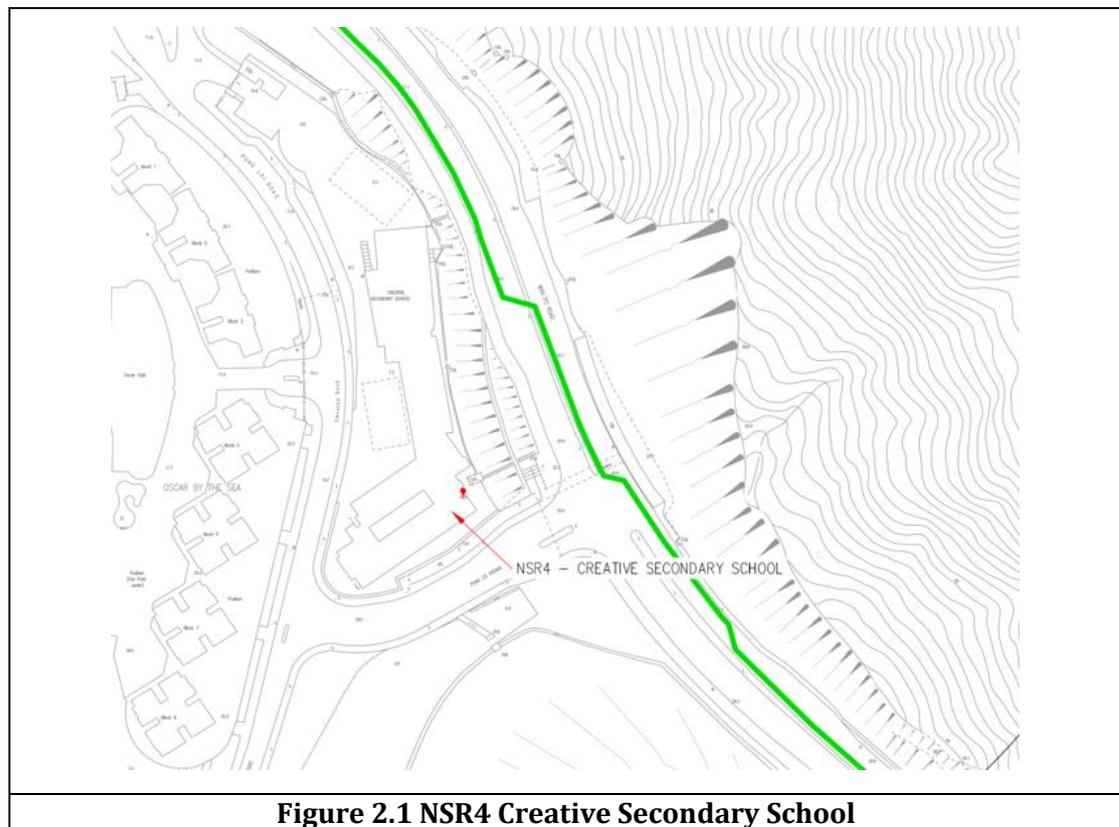




Figure 2.2 NSR24 PLK Laws Foundation College



Figure 2.3 NSR31 School of Continuing and Professional Studies - CUHK

IMPACT MONITORING METHODOLOGY

- 2.10. Integrated sound level meter was used for the noise monitoring. The meter was in compliance with the International Electrotechnical Commission Publications 651: 1979 (Type 1) and 804: 1985 (Type 1) specifications. Immediately prior to and following each noise measurement the accuracy of the sound level meter was checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements was accepted as valid only if the calibration levels before and after the noise measurements agree to within 1.0 dB(A). Calibration certificates of the instruments used to be shown at **Appendix F** are intentionally left blank since no impact monitoring equipment was used in the reporting month.
- 2.11. Noise measurements were not made in the presence of fog, rain, wind with a steady speed exceeding 5 m/s or wind with gusts exceeding 10 m/s. The wind speed shall be checked with a portable wind speed meter capable of measuring the wind speed in m/s.

ACTION AND LIMIT LEVELS

- 2.12. The Action/Limit Levels are in line with the criteria of Practice Note for Professional Persons (ProPECC PN 2/93) “Noise from Construction Activities – Non-statutory Controls” and Technical Memorandum on Environmental Impact Assessment Process issued by HKSAR Environmental Protection Department [“EPD”] under the Environmental Impact Assessment Ordinance, Cap 499, S.16 are presented in **Table 2.3**.

Table 2.3 Action and Limit Levels for Noise per EM&A Manual

Time Period	Action	Limit (dB(A))
0700-1900 on normal weekdays	When one documented complaint is received from any one of the noise sensitive receivers	<ul style="list-style-type: none"> • 70 dB(A) for school and • 65 dB(A) during examination period

Note: Limits specified in the GW-TM and IND-TM for construction and operation noise, respectively.

- 2.13. If exceedances were found during noise monitoring, the actions in accordance with the Event and Action Plan shall be carried out according to **Appendix E**.

MONITORING RESULTS AND OBSERVATIONS

2.14. Referring to EM&A Manual Section 4.1.2, the impact noise monitoring should be carried out when there are Contract-related construction activities undertaken within a radius of 300m from the monitoring stations. No monitoring station was located within a radius of 300m of the Contract site as shown in **Figure 2.4**, no impact monitoring for noise impact was conducted in the reporting period.

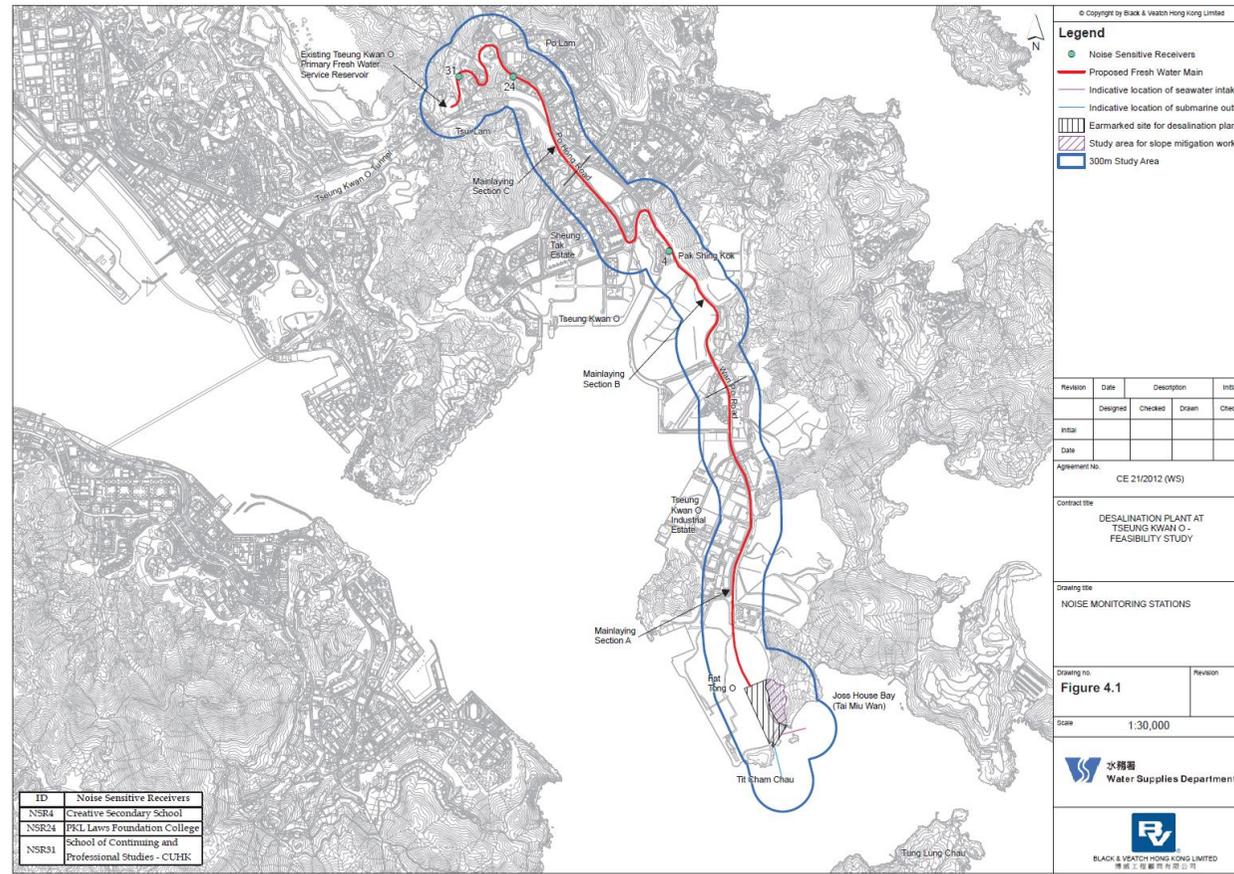


Figure 2.4 Site Layout Plan with Noise Sensitive Receivers and Desalination Plant

3. WATER QUALITY

- 3.1. In accordance with the recommendations of the EIA, water quality monitoring is required during dredging for the submarine pipelines and, during operation phase. In addition, baseline water quality monitoring will be required prior to the commencement of marine construction activities. The following Section provides details of the water quality monitoring to be undertaken by the Environmental Team (ET) to verify the distance of sediment and brine plume dispersion and to identify whether the potential exists for any indirect impacts to occur to ecological sensitive receivers. The water quality monitoring programme will be carried out to allow any deteriorating water quality to be readily detected and timely action taken to rectify the situation. The status and locations of water quality sensitive receivers and the marine works location may change after issuing this Document. If required, the ET in consultation with IEC will propose updated monitoring locations and seek approval from EPD.
- 3.2. Water quality monitoring for the Contract can be divided into the following stages:
- Dredging activities during construction phase;
 - Discharge of effluent from main disinfection during construction phase;
 - Operation phase – first year upon commissioning; and,
 - Continuous monitoring of effluent quality.

WATER QUALITY PARAMETERS

- 3.3. The parameters that have been selected for measurement in situ and in the laboratory are those that were either determined in the EIA to be those with the most potential to be affected by the construction works or are a standard check on water quality conditions. Parameters to be measured in the impact monitoring are listed in **Table 3.1**.

Table 3.1 Parameters measured in the Impact Marine Water Quality Monitoring

Parameters	Unit	Abbreviation
In-situ measurements		
Dissolved oxygen	mg/L	DO
Temperature	oC	-
pH	-	-
Turbidity	NTU	-
Salinity	0/00	-
Total Residual Chlorine NOTE1	mg/L	TRC
Laboratory measurements		
Suspended Solids	mg/L	SS
Iron-Soluble	mg/L	Fe
Anti-scalant as Reactive Phosphorus	mg/L	PO4 as P-

NOTE 1: Monitoring of Total Residual Chlorine will be conducted when cleaning and sterilization of the new freshwater main is carried out.

- 3.4. In addition to the water quality parameters, other relevant data were also being measured and recorded in Water Quality Monitoring Logs, including the location of the sampling stations, water depth, time, weather conditions, sea conditions, tidal stage, current direction and velocity, special phenomena and work activities undertaken around the monitoring and works area that may influence the monitoring results.

MONITORING EQUIPMENT

- 3.5. For water quality monitoring, the following equipment were used:

Dissolved Oxygen and Temperature Measuring Equipment - The instrument was a portable, weatherproof dissolved oxygen measuring instrument complete with cable, sensor, comprehensive operation manuals, and was operable from a DC power source. It was capable of measuring: dissolved oxygen levels in the range of 0 - 20 mg/L and 0 - 200% saturation; and a temperature of 0 - 45 degrees Celsius. It has a membrane electrode with automatic temperature compensation complete with a cable of not less than 35 m in length. Sufficient stocks of spare electrodes and cables were available for replacement where necessary (e.g. YSI model 59 DO meter, YSI 5739 probe, YSI 5795A submersible stirrer with reel and cable or an approved similar instrument).

Turbidity Measurement Equipment - The instrument was a portable, weatherproof turbidity-measuring unit complete with cable, sensor and comprehensive operation manuals. The equipment was operated from a DC power source, it has a photoelectric sensor capable of measuring turbidity between 0 - 1000 NTU and complete with a cable with at least 35 m in length (for example Hach 2100P or an approved similar instrument).

Salinity Measurement Instrument - A portable salinometer capable of measuring salinity in the range of 0 - 40 ppt was provided for measuring salinity of the water at each monitoring location.

Water Depth Gauge - A portable, battery-operated echo sounder (for example Seafarer 700 or a similar approved instrument) was used for the determination of water depth at each designated monitoring station. This unit will preferably be affixed to the bottom of the work boat if the same vessel is to be used throughout the monitoring programme. The echo sounder was suitably calibrated.

Positioning Device - A Global Positioning System (GPS) was used during monitoring to allow accurate recording of the position of the monitoring vessel before taking measurements. The Differential GPS, or equivalent instrument, was suitably calibrated at appropriate checkpoint (e.g. Quarry Bay Survey Nail) to verify that the monitoring station is at the correct position before the water quality monitoring commence.

Water Sampling Equipment - A water sampler, consisting of a PVC or glass cylinder of not less than two litres, which can be effectively sealed with cups at both ends, was used (e.g. Kahlsico Water Sampler 13SWB203 or an approved similar instrument). The water sampler has a positive latching system to keep it open and prevent premature closure until released by a messenger when the sampler is at the selected water depth.

Total Residual Chlorine for Discharge of Sterilization Water - Total residual chlorine (TRC) shall be measured in-situ using a handheld colorimeter with its testing toolkits.

SAMPLING / TESTING PROTOCOLS

- 3.6. All in situ monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS or any other international accreditation scheme before use, and subsequently re-calibrated at monthly intervals throughout the stages of the water quality monitoring. Responses of sensors and electrodes were checked with certified standard solutions before each use.
- 3.7. **Table 3.2** summarizes the equipment used in the water quality monitoring program. The copies of the calibration certification of multi-parameter water quality system are shown in the **Appendix N**.

Table 3.2 Water Quality Monitoring Equipment

Equipment	Model & Make	Serial Number	Calibration Expiry Date	Qty.
Water Sampler	A 2-Litre transparent PVC cylinder with latex cups at both ends (Kahlsico Water Sampler 13SWB20)	-	-	1
Multi-parameter Water Quality System	HORIBA U-53	PPHNOMXY	10 Aug 22	3
		THAUKESL	08 Sep 22	
		NEKVM2XU	14 Sep 22	

- 3.8. On-site calibration of field equipment was follow the “Guide to On-Site Test Methods for the Analysis of Waters”, BS 1427: 2009. Sufficient stocks of spare parts were maintained for replacements when necessary. Backup monitoring equipment was made available so that monitoring can proceed uninterrupted even when equipment is under maintenance, calibration etc.

LABORATORY MEASUREMENT AND ANALYSIS

- 3.9. All laboratory works were carried out in a HOKLAS accredited laboratory. Sufficient volume of each water sample was collected at the monitoring stations for carrying out the laboratory analyses. Using chain of custody forms, collected water samples were transferred to a HOKLAS accredited laboratory for immediate processing. The determination work was start within the next working day after collection of the water samples. The laboratory measurements were provided to the client within 5 working days of the sampling event. Analytical methodology and sample preservation of other parameters were based on the latest edition of Standard Methods for the Examination of Waste and Wastewater published by APHA, AWWA and WPCF and methods by USEPA, or suitable method in accordance with requirements of HOKLAS or another internationally accredited scheme. The submitted information was including pre-treatment procedures, instrument use, Quality Assurance/Quality Control (QA/QC) details (such as blank, spike

recovery, number of duplicate samples per-batch etc), detection limits and accuracy. The QA/QC details were in accordance with requirements of HOKLAS or another internationally accredited scheme.

3.10. Parameters for laboratory measurements, standard methods and detection limits are presented in **Table 3.3**.

Table 3.3 Laboratory measurements, standard methods and corresponding detection limits of marine water quality monitoring

Parameters	Standard Methods	Detection Limit	Reporting Limit	Precision
Dissolved oxygen (mg/L)	Instrumental, CTD	0.1	-	±25%
Temperature (oC)	Instrumental, CTD	0.1	-	±25%
pH	Instrumental, CTD	0.1	-	±25%
Turbidity (NTU)	Instrumental, CTD	0.1	-	±25%
Salinity (0/00)	Instrumental, CTD	0.1	-	±25%
Suspended Solids (mg/L)	APHA 23 rd Ed 2540D	1.0	2.5	±17%
Total Residual Chlorine (mg/L)	APHA 21 st Ed 4500 - Cl ₂	0.1	0.2	±10%
Iron-soluble	USEPA 6010C	0.2	0.2	±25%
Anti-scalant as Reactive phosphorus	APHA 4500P: B&F	0.01	0.01	±25%

3.11. If exceedances were found during water monitoring, the actions in accordance with the Event and Action Plan will be carried out according to **Appendix G**.

MONITORING LOCATION

3.12. The Impact water quality monitoring locations are in accordance with the EM&A Manual and detailed in **Table 3.4** below. A schedule for water quality monitoring was prepared by the ET and approved by IEC and EPD prior to the commencement of the monitoring.

Table 3.4 Location of Impact Water Quality Monitoring Stations

Station	Easting	Northing	Description
CE	843550	815243	Upstream control station at ebb tide
CF	846843	810193	Upstream control station at flood tide
WSR1	846864	812014	Ecological sensitive receiver at Tung Lung Chau
WSR2	847645	812993	Fisheries sensitive receiver at Tung Lung Chau
WSR3	848023	813262	Ecological sensitive receiver at Tung Lung Chau
WSR4	847886	814154	Ecological sensitive receiver at Tai Miu Wan

WSR16	845039	815287	Ecological sensitive receiver at Fat Tong Chau
WSR33	847159	814488	Ecological sensitive receiver at Tai Miu Wan
WSR36	846878	814081	Ecological sensitive receiver at Kwun Tsai
WSR37	846655	813810	Ecological sensitive receiver at Tit Cham Chau
NF1	846542	813614	Edge of mixing zone, ~ 200m west of outfall diffuser
NF2	846942	813614	Edge of mixing zone, ~ 200m east of outfall diffuser
NF3	846742	813414	Edge of mixing zone, ~ 200m south of outfall diffuser

3.13. WSR1 to WSR37 were identified in accordance with Annex 14 of the EIAO-TM as well as Clause 3.4.4.2 of the Environmental Impact Assessment Study Brief for Desalination Plant at Tseung Kwan O (No. ESB-266/2013). WSR1 to WSR3 are sited near the Tung Lung Chau Fish Culture Zone; WSR16 and WSR36 are sited near the coral assemblages along the coastlines of Fat Tong Chau and Kwun Tsai respectively; WSR 4 and WSR33 are sited near the Coastal Protection Area and coral assemblages in waters of Tai Miu Wan; WSR37 is sited near the fisheries resource including spawning and nursery grounds at the coastal water of Tit Cham Chau.

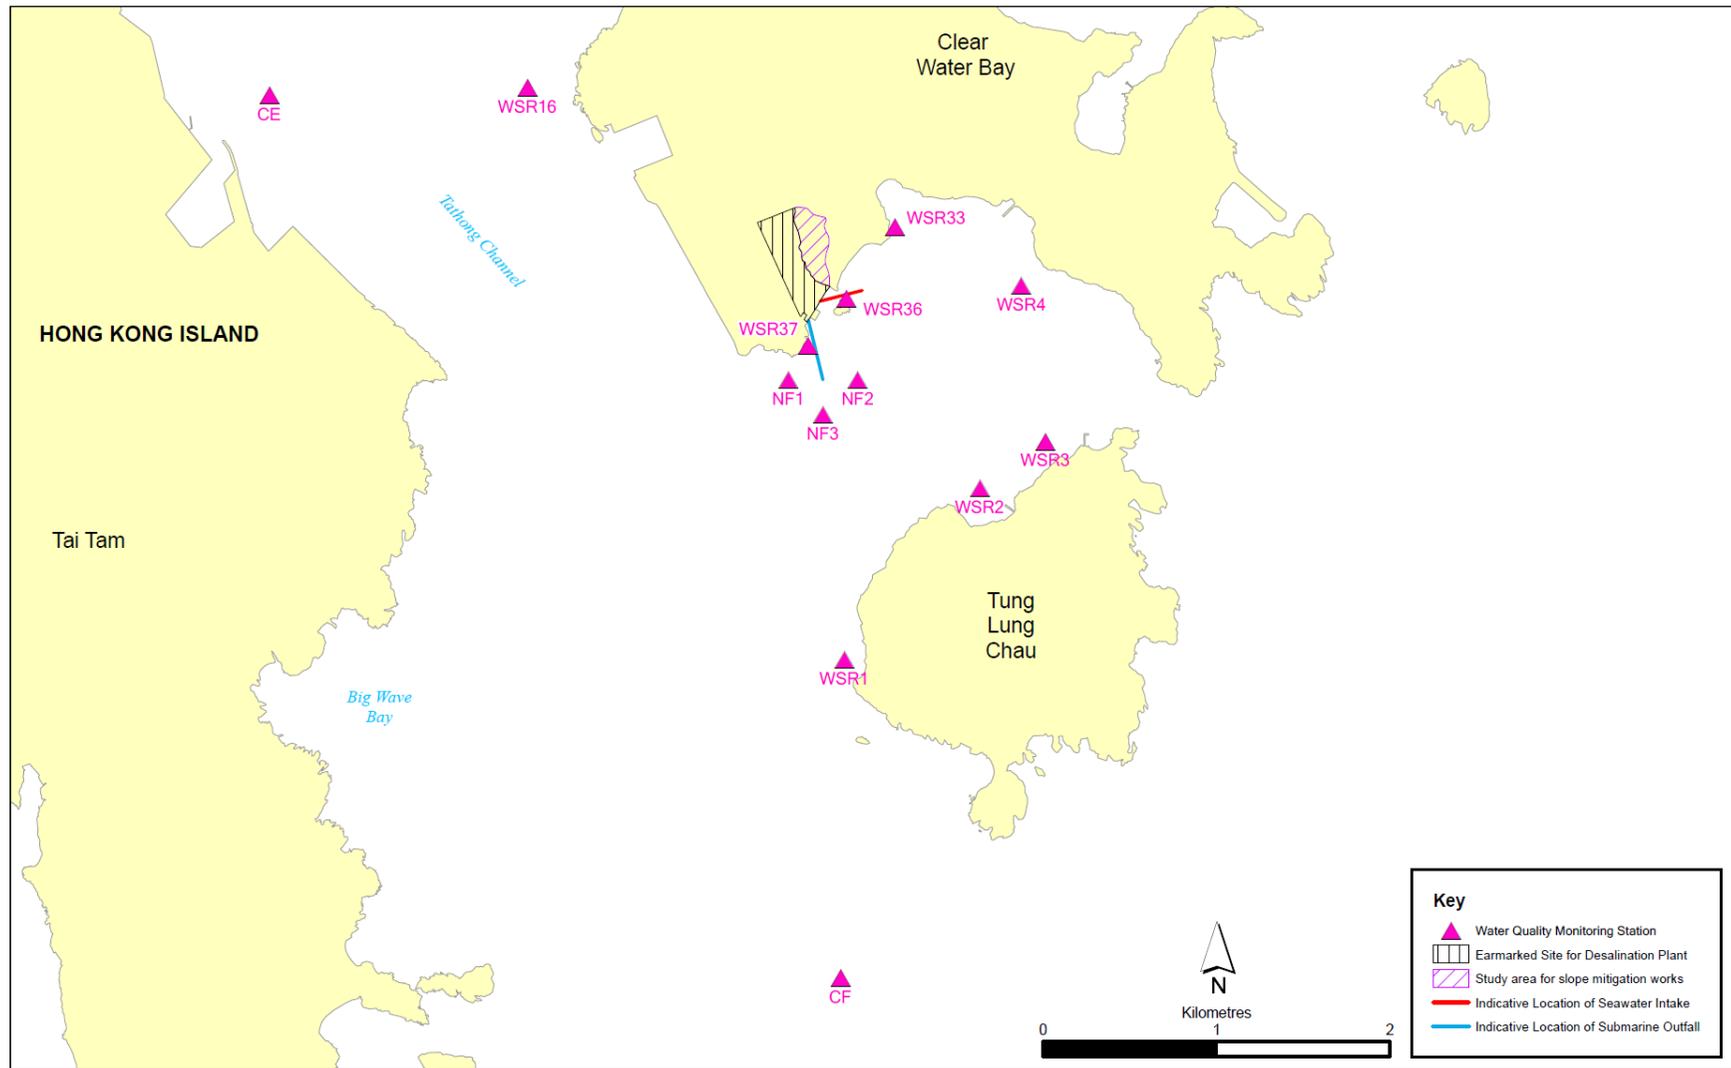


Figure 3.1 Impact water quality monitoring locations under EM&A Manual

SAMPLING FREQUENCY

- 3.14. During periods when there are dredging works, impact monitoring was undertaken at the monitoring stations as shown in **Figure 3.1** and **Table 3.4** three days per week during the construction phase after the commencement of marine construction works and dredging activities. Monitoring at each station was undertaken at both mid-ebb and mid-flood tides on the same day. The tidal range selected for the impact monitoring was at least 0.5 m for both flood and ebb tides as far as practicable. The interval between two sets of monitoring was not less than 36 hours. The monitoring frequency would be increased in the case of exceedances of Action/Limit Levels if considered necessary by ET. Monitoring frequency would be maintained as far as practicable.
- 3.15. The monitoring location/position, time, water depth, water temperature, salinity, weather conditions, sea conditions, tidal stage, special phenomena and work underway at the marine works site were recorded.

SAMPLING DEPTHS & REPLICATION

- 3.16. For Impact monitoring, each station was sampled and measurements/ water samples was taken at three depths, 1 m below the sea surface, mid-depth and 1 m above the seabed. For stations that are less than 3 m in depth, only the mid depth sample was taken. For stations that are less than 6 m in depth, only the surface and seabed sample were taken. For in situ measurements, duplicate readings were made at each water depth at each station. Duplicate water samples were collected at each water depth at each station. All water quality monitoring results were summarized in **Appendix L**.

ACTION AND LIMIT LEVELS

- 3.17. The Action and Limit Levels have been set based on the derivation criteria specified in the EM&A Manual. The Action/Limit Levels have been derived and are presented in **Table 3.5**.

MONITORING PROGRAMME

- 3.18. The ET of the Contract had conducted the baseline water monitoring between 12 May 2020 to 6 Jun 2020 at the thirteen designated monitoring stations and the six designated monitoring at waters near TKO in accordance with the EM&A Manual and Contract Specification respectively. The baseline monitoring results was presented in Baseline Water Quality Monitoring Report separately.
- 3.19. The commencement of marine construction and dredging activities for the Contract have been conducted in March and April 2021 respectively.

Table 3.5 Derived Action and Limit Levels for Water Quality

Parameters	Action	Limit
Construction Phase Impact Monitoring		
DO in mg/L	<u>Surface and Middle</u> 7.30 mg L ⁻¹ <u>Bottom</u> 7.31 mg L ⁻¹ <u>Tung Lung Chau Fish Culture Zone</u> 5.1 mgL ⁻¹ or level at control station (whichever the lower)	<u>Surface and Middle</u> 4 mg L ⁻¹ <u>Bottom</u> 2 mg L ⁻¹ <u>Tung Lung Chau Fish Culture Zone</u> 5.0 mgL ⁻¹ or level at control station (whichever the lower)
SS in mg/L (Depth-averaged)	5.00 mg L ⁻¹ or 20% exceedance of value at any impact station compared with corresponding data from control station	6.00 mg L ⁻¹ or 30% exceedance of value at any impact station compared with corresponding data from control station
Turbidity in NTU (Depth-averaged)	2.41 NTU or 20% exceedance of value at any impact station compared with corresponding data from control station	2.84 NTU or 30% exceedance of value at any impact station compared with corresponding data from control station
First-year Operation Phase Monitoring ^{iv}		
DO in mg/L	<u>Surface and Middle</u> 7.30 mg L ⁻¹ <u>Bottom</u> 7.31 mg L ⁻¹ <u>Tung Lung Chau Fish Culture Zone</u> 5.1 mgL ⁻¹ or level at control station (whichever the lower)	<u>Surface and Middle</u> 4 mg L ⁻¹ <u>Bottom</u> 2 mg L ⁻¹ <u>Tung Lung Chau Fish Culture Zone</u> 5.0 mgL ⁻¹ or level at control station (whichever the lower)
SS in mg/L (Depth-averaged)	5.00 mg L ⁻¹ or 20% exceedance of value at any impact station compared with corresponding data from control station	6.00 mg L ⁻¹ or 30% exceedance of value at any impact station compared with corresponding data from control station

Turbidity in NTU (Depth-averaged)	2.41 NTU or 20% exceedance of value at any impact station compared with corresponding data from control station	2.84 NTU or 30% exceedance of value at any impact station compared with corresponding data from control station
Salinity in PSU (Depth-averaged)	34.28 PSU or 9% exceedance of value at any impact station compared with corresponding data from control station	34.60 PSU or 10% exceedance of value at any impact station compared with corresponding data from control station
Iron in mg/L (Depth-averaged)	0.3 mgL ⁻¹	0.3 mgL ⁻¹

Notes:

- i. "Depth-averaged" is calculated by taking the arithmetic means of reading of all three depths.
- ii. For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits.
- iii. For Turbidity, SS, iron and Salinity, non-compliance of the water quality limits occurs when monitoring result is higher than the limits.
- iv. For the Action and Limit Levels adopted during First-year Operation Phase Monitoring, further review would be made according to the EM&A Manual during Operation Phase.

MONITORING RESULTS AND OBSERVATIONS

- 3.20. General water quality monitoring at the ten monitoring stations (CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36 and WSR37) were conducted on 2, 4, 7, 9, 11, 13, 15, 17, 20, 22, 24, 28 and 30 June 2022.
- 3.21. Due to adverse weather condition, mid-flood tide water sampling was cancelled on 9 June 2022. Detail of water quality monitoring schedule are presented in **Appendix D**.
- 3.22. Fourteen (14) of the general water quality monitoring results of suspended solids (SS) obtained had exceeded the Action Level. Nine (9) of the general water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. Details of the exceedance are presented in **Appendix O**.
- 3.23. Investigation on the reason of exceedance has been carried out, where the exceedances of SS on 7, 11, 13, 15, 17 and 28 June 2022 were concluded to be unrelated to the Contract as detailed in the Incident Reports on Action Level or Limit Level Non-compliance along with supporting materials in **Appendix O**.
- 3.24. Monitoring results of 6 key parameters: Salinity, DO, turbidity, SS, pH and temperature in this reporting, are summarized in **Table 3.6** and **Table 3.7**, and detailed results are presented in **Appendix L**.

Table 3.6 Summary of Impact Water Quality Monitoring Results (Mid-Flood)

Locations		Parameters						
		Salinity (ppt)	Dissolved Oxygen (mg/L)		pH	Turbidity (NTU)	Suspended Solids (mg/L)	Temp.(°C)
			Surface & Middle	Bottom				
CE	Avg.	31.5	9.1	9.1	8.2	3.9	3.4	26.6
	Min.	30.2	8.2	8.3	8.1	2.6	2.5	21.5
	Max.	32.8	9.8	9.7	8.4	6.2	6.0	28.5
CF	Avg.	31.2	9.0	8.9	8.2	4.5	3.9	26.9
	Min.	29.6	8.1	8.1	8.1	3.1	2.5	25.2
	Max.	32.5	9.7	9.7	8.4	6.6	10.0	28.2
WSR1	Avg.	31.2	9.0	9.0	8.2	3.3	3.8	27.0
	Min.	30.0	8.1	8.1	8.1	2.1	2.5	25.3
	Max.	33.0	10.0	9.9	8.4	5.3	8.0	28.5
WSR2	Avg.	31.4	9.0	9.0	8.3	2.6	3.7	27.0
	Min.	30.2	8.2	8.2	8.1	1.9	2.5	25.3
	Max.	32.9	9.8	9.6	8.4	4.3	9.0	28.5
WSR3	Avg.	31.3	9.1	9.1	8.2	3.1	3.4	26.8
	Min.	29.4	8.2	8.2	8.1	1.9	2.5	25.2
	Max.	32.4	9.9	10.0	8.4	5.6	5.0	28.0
WSR4	Avg.	31.4	8.9	8.9	8.3	3.4	3.8	26.9
	Min.	30.0	8.3	8.4	8.1	2.2	2.5	25.2
	Max.	32.6	10.0	9.9	8.4	5.4	9.0	28.7
WSR16	Avg.	31.3	9.0	9.0	8.3	3.2	3.7	27.0
	Min.	30.3	8.1	8.2	8.1	1.9	2.5	25.6
	Max.	32.4	9.8	9.8	8.4	5.8	8.0	28.3
WSR33	Avg.	31.1	9.2	9.2	8.3	3.1	4.8	27.0
	Min.	29.8	8.4	8.4	8.1	2.0	2.5	25.1
	Max.	32.5	10.1	9.9	8.4	5.2	35.0	28.8
WSR36	Avg.	31.3	8.9	8.9	8.2	3.1	4.3	26.9
	Min.	29.9	8.3	8.3	8.1	2.0	2.5	25.1
	Max.	32.7	10.0	10.0	8.3	4.8	25.0	28.0
WSR37	Avg.	31.4	8.9	8.9	8.2	3.2	3.9	27.1
	Min.	30.4	8.3	8.3	8.1	1.9	2.5	25.6
	Max.	33.0	9.9	9.9	8.4	5.2	7.0	28.6

Notes:

- i. "Avg", "Min" and "Max" is the average, minimum and maximum respectively of the data from measurements conducted under mid-flood and mid-ebb tides at three water depths, except that of DO where the data for "Surface & Middle" and "Bottom" are calculated separately.
- ii. Measurement data of Suspending Solids would be rounding to 2.5mg/L if the value was less than 2.5mg/L to facilitate data analysing.

Table 3.7 Summary of Impact Water Quality Monitoring Results (Mid-Ebb)

Locations		Parameters						
		Salinity (ppt)	Dissolved Oxygen (mg/L)		pH	Turbidity (NTU)	Suspended Solids (mg/L)	Temp.(°C)
			Surface & Middle	Bottom				
CE	Avg.	31.3	8.9	8.9	8.2	4.4	3.7	27.0
	Min.	29.6	8.1	8.0	8.0	3.1	2.5	25.2
	Max.	33.1	9.9	9.8	8.4	6.5	10.0	29.1
CF	Avg.	31.5	9.0	9.0	8.2	3.7	3.8	27.0
	Min.	30.3	8.2	8.3	8.0	2.5	2.5	25.4
	Max.	33.0	9.8	9.8	8.4	5.9	7.0	29.0
WSR1	Avg.	31.4	8.7	8.7	8.2	3.1	3.9	27.0
	Min.	29.8	8.1	8.1	8.1	2.0	2.5	25.8
	Max.	32.6	9.7	9.6	8.5	5.1	14.0	28.6
WSR2	Avg.	31.2	8.9	9.0	8.2	2.5	3.5	27.0
	Min.	29.6	8.2	8.2	8.1	1.8	2.5	25.8
	Max.	32.9	10.2	10.1	8.4	4.8	7.0	28.6
WSR3	Avg.	31.3	8.9	8.9	8.2	3.2	3.8	27.0
	Min.	30.3	8.0	8.0	8.1	2.0	2.5	25.2
	Max.	32.3	9.7	9.6	8.3	4.6	18.0	28.8
WSR4	Avg.	31.5	8.8	8.8	8.2	3.1	4.2	27.0
	Min.	30.3	8.1	8.2	8.0	2.0	2.5	25.8
	Max.	32.9	9.5	9.5	8.4	5.2	18.0	29.1
WSR16	Avg.	31.3	9.0	9.0	8.2	3.2	4.0	26.9
	Min.	30.2	8.2	8.3	8.0	1.9	2.5	25.7
	Max.	32.6	9.7	9.6	8.4	5.1	16.0	28.7
WSR33	Avg.	31.3	9.1	9.1	8.2	3.0	3.9	27.0
	Min.	30.1	8.1	8.1	8.1	2.0	2.5	25.9
	Max.	32.4	10.1	10.1	8.4	5.1	13.0	28.9
WSR36	Avg.	31.3	8.9	8.8	8.2	3.3	3.9	27.0
	Min.	29.4	8.1	8.1	8.1	2.0	2.5	25.9
	Max.	32.8	9.9	9.9	8.4	4.9	17.0	28.7
WSR37	Avg.	31.4	8.8	8.8	8.2	3.2	3.7	26.9
	Min.	30.0	8.2	8.2	8.1	2.1	2.5	25.9
	Max.	32.6	9.8	9.8	8.3	4.9	7.0	29.0

Notes:

- i. "Avg", "Min" and "Max" is the average, minimum and maximum respectively of the data from measurements conducted under mid-flood and mid-ebb tides at three water depths, except that of DO where the data for "Surface & Middle" and "Bottom" are calculated separately.
- ii. Measurement data of Suspending Solids would be rounding to 2.5mg/L if the value was less than 2.5mg/L to facilitate data analysing.

4. WASTE

4.1. The waste generated from this Contract includes inert construction and demolition (C&D) materials, and non-inert C&D materials. Non-inert C&D materials are made up of general refuse, vegetative wastes and recyclable wastes such as plastics and paper/cardboard packaging waste. Steel materials generated from the Contract are also grouped into non-inert C&D materials as the materials were not disposed of with other inert C&D materials. With reference to relevant handling records and trip tickets of this Contract, the quantities of different types of waste generated in the reporting month are summarized in **Table 4.1**. Details of cumulative waste management data are presented as a waste flow table in **Appendix H**.

Table 4.1 Quantities of Waste Generated from the Contract during June 2022

Reporting Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper / cardboard packaging	Plastics ⁽¹⁾	Chemical Waste	Others, e.g. general refuse
	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)	(in ,000kg)
June 2022	80.960	0.000	0.000	0.000	80.960	0.000	0.000	0.124	0.004	0.000	271.000

Notes: (1) Plastics refer to plastic bottles / containers, plastic sheets / foam from packaging material

5. LANDFILL GAS MONITORING

MONITORING REQUIREMENT

- 5.1. In accordance with Section 11 of the EM&A Manual, monitoring of landfill gas is required for construction works within the 250m Consultation Zone. Part of the desalination plant and the indicative area of natural slope mitigation works fall within the SENT Landfill Extension Consultation Zone; and part of the 1,200 mm diameter fresh water mains along Wan Po Road falls within the SENT Landfill and SENT Landfill Extension Consultation Zones, TKO Stage II/III Restored Landfill and TKO Stage I Restored Landfill Consultation Zones.

MONITORING LOCATION

- 5.2. Monitoring of oxygen, methane, carbon dioxide and barometric pressure would be performed for excavations at 1m depth or more within the consultation Zone.
- 5.3. During construction of works within the consultation zones, excavations of 1m depth or more was monitored:
- At the ground surface before excavation commences;
 - Immediately before any worker enters the excavation;
 - At the beginning of each working day for the entire period the excavation remains open; and
 - Periodically through the working day whilst workers are in the excavation.
- 5.4. For excavations between 300mm and 1m deep, measurements were carried out:
- Directly after the excavation has been completed; and
 - Periodically whilst the excavation remains open.

MONITORING PROGRAMME

- 5.5. Since part of the desalination plant (Wan Po Road and MIC compound/Basketball Court) and the indicative area of natural slope mitigation works fall within the SENT Landfill Extension Consultation Zone in this contract (Figure 5.1), landfill gas monitoring would be required for Wan Po Road and MIC compound/Basketball Court (Figure 5.2) if excavations were conducted at more than 300mm deep. Although SENT Landfill Extension has commenced operation since November 2021, no excavation works were conducted at MIC compound/Basketball Court. Hence no landfill gas monitoring would be scheduled for MIC compound/Basketball Court at the current stage.

MONITORING LOCATION

- 5.6. The area required to be monitored for landfill gas in the reporting period is shown in **Figure 5.2**.



Figure 5.1 Overview of the SENT Extension Consultation Zone and the Contract Site Area

MONITORING PARAMETERS

5.7. LFG monitoring was carried out to identify any migration between the landfill and the Contract and to ensure the safety of the construction, operation and maintenance personnel working on-site, visitors and any other person within the Contract area.

5.8. The following parameters were monitored:

- Methane
- Oxygen
- Carbon Dioxide
- Barometric Pressure

5.9. Action and Limit Level are provided in **Table 5.1**.

Table 5.1 Action and Limit Level for Landfill Gas Monitoring Equipment

Parameters	Action Level	Limit Level
Oxygen (O ₂)	<19% O ₂	<19% O ₂
Methane (CH ₄)	>10% LEL	>20% LEL
Carbon Dioxide (CO ₂)	>0.5% CO ₂	>1.5% CO ₂

MONITORING EQUIPMENT

5.10. Landfill Gas monitoring was carried out using intrinsically-safe, portable multi-gas monitoring instruments. The gas monitoring equipment is:

- Complying with the Landfill Gas Hazard Assessment Guidance Note as intrinsically safe;
- Capable of continuous barometric pressure and gas pressure measurements;
- Normally operated in diffusion mode unless required for spot sampling, when it should be capable of operating by means of an aspirator or pump;
- Having low battery, fault and over range indication incorporated;
- Capable of storing monitoring data, and shall be capable of being downloaded directly;
- Measure in the following ranges:

methane	0-100% LOWER EXPLOSION LIMIT (LEL) AND 0-100% v/v;
oxygen	0-25% v/v;
carbon dioxide	0-5% v/v; and
barometric pressure	mBar (absolute)

- alarm (both audibly and visually) in the event that the concentrations of the following are exceeded:

methane	>10% LEL;
oxygen	<19%
carbon dioxide	>0.5% by volume
barometric pressure	mBar (absolute)

5.11. Monitoring Equipment used in the reporting period are summarized in **Table 5.2**. The Landfill Gas monitoring equipment calibration certificate is presented in **Appendix N**.

Table 5.2 Landfill Gas Monitoring Equipment

Equipment	Brand and Model	Calibration Expiry Date
Portable Gas Detector	PS500 – 254928	28 September 2022

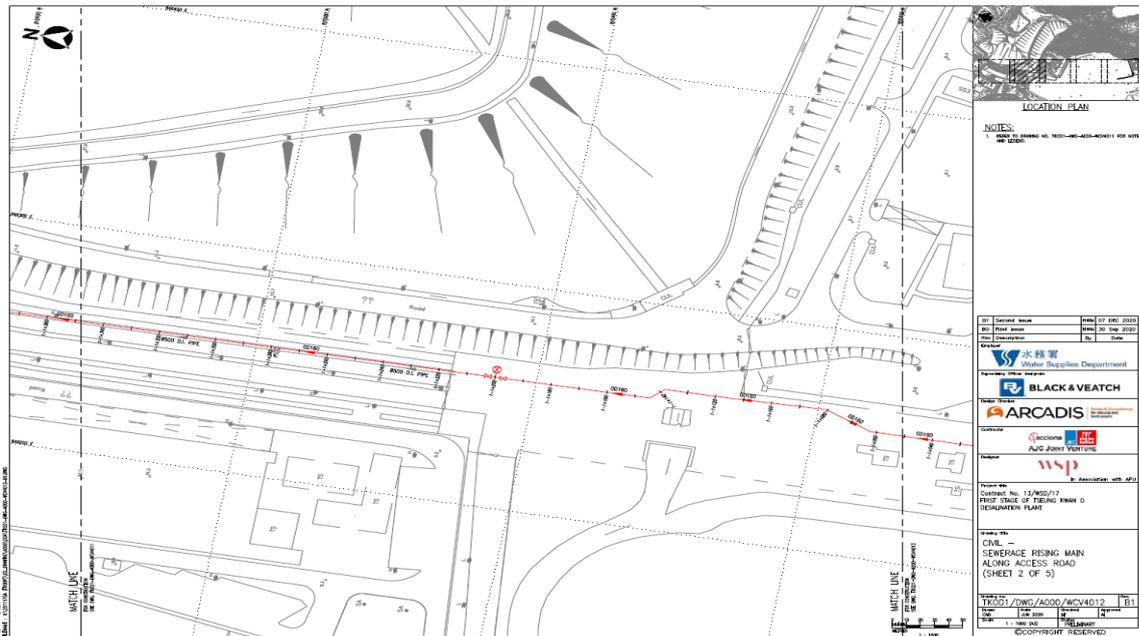


Figure 5.2 Location Map for Landfill Gas Monitoring at Wan Po Road

MONITORING RESULTS AND OBSERVATIONS

5.12. In this reporting period, no landfill gas monitoring was conducted in the reporting month.

6. SUMMARY OF EXCEEDANCE, COMPLAINTS, NOTIFICATION OF SUMMONS AND PROSECUTIONS

6.1. The Environmental Complaint Handling Procedure is shown in below **Figure 6.1**:

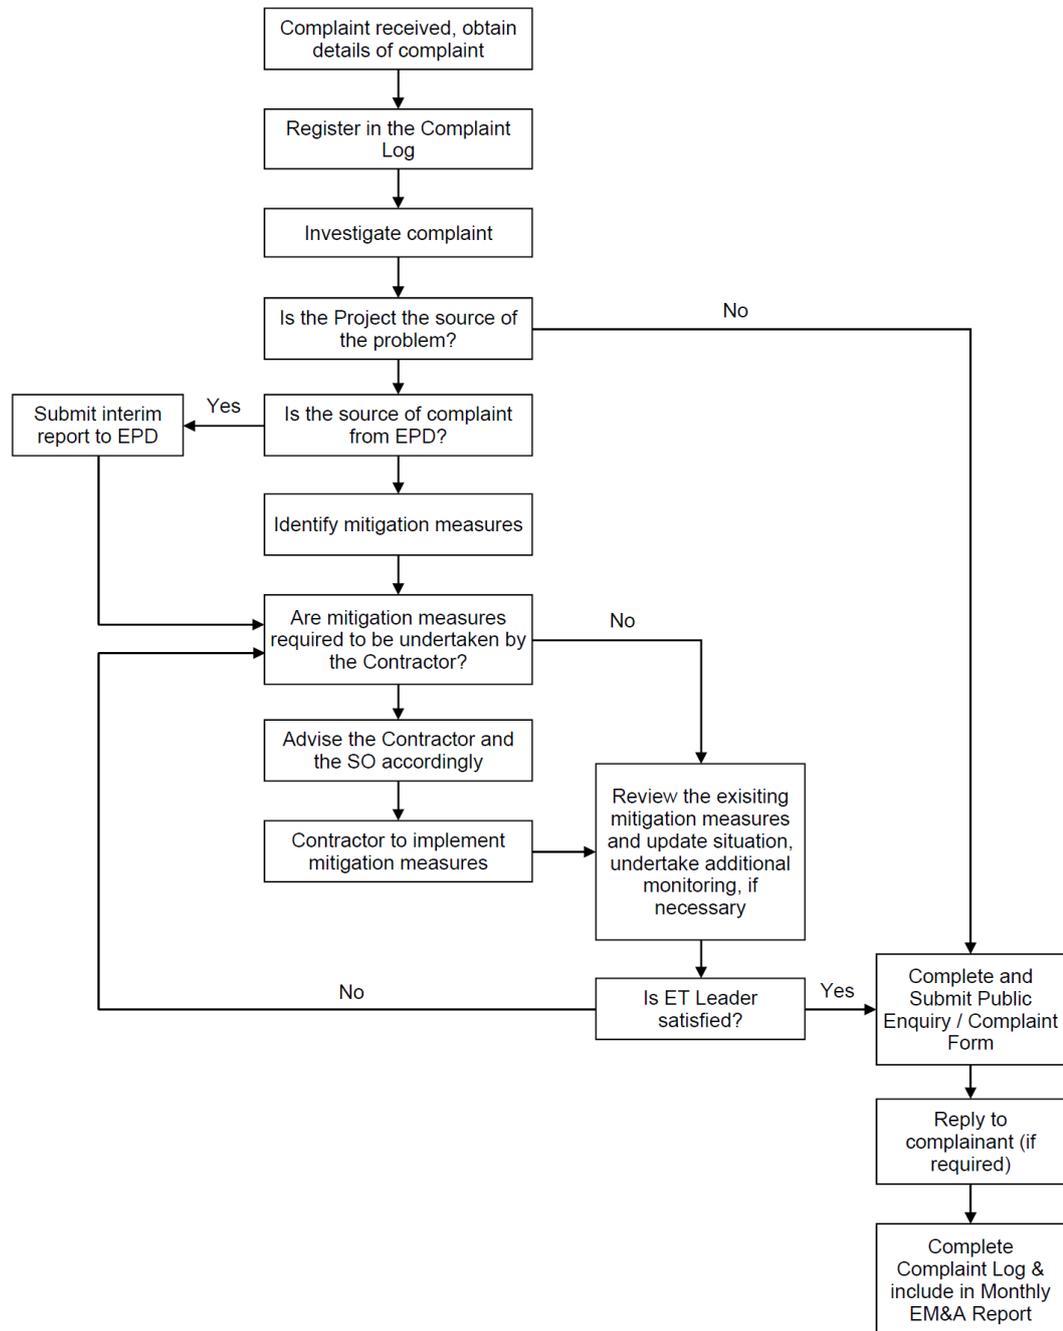


Figure 6.1 Environmental Complaint Handling Procedures

6.2. No noise monitoring was conducted during the reporting period since there are no Contract-related construction activities undertaken within a radius of 300m from the monitoring locations.

- 6.3. General water quality monitoring at the ten monitoring stations (CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36 and WSR37) were conducted on 2, 4, 7, 9, 11, 13, 15, 17, 20, 22, 24, 28 and 30 June 2022.
- 6.4. Fourteen (14) of the general water quality monitoring results of suspended solids (SS) obtained had exceeded the Action Level. Nine (9) of the general water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. Details of the exceedance are presented in **Appendix O**.
- 6.5. Investigation on the reason of exceedance has been carried out, where the exceedances of SS on 7, 11, 13, 15, 17 and 28 June 2022 were concluded to be unrelated to the Contract as detailed in the Incident Reports on Action Level or Limit Level Non-compliance along with supporting materials in **Appendix O**.
- 6.6. In this reporting period, no landfill gas monitoring was conducted in the reporting month.
- 6.7. No environmental complaint, notification of summons and prosecution was received in the reporting period.
- 6.8. Statistics on complaints and regulatory compliance are summarized in **Appendix J**.

7. EM&A SITE INSPECTION

7.1. Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures under the Contract. In the reporting period, site inspections were carried out on 7, 14, 21 and 28 June 2022 at the site portions listed in **Table 7.1** below.

Table 7.1 Summaries of Site Inspection Record

Date	Inspected Site Portion	Time
7 June 2022	TKO 137	14:30 – 16:30
14 June 2022	TKO 137	14:30 – 16:30
21 June 2022	TKO 137	14:35 – 15:35
28 June 2022	TKO 137	09:15 – 11:00

7.2. Joint site inspections with IEC were carried out on 7, 14, 21 and 28 June 2022.

7.3. Environmental deficiencies were observed during weekly site inspection. Key observations during the site inspections and during the reporting period are summarized in **Table 7.2**.

Table 7.2 Site Observations

Date	Environmental Observations	Follow-up Status
7 June 2022	No major observations were recorded on the reporting day.	Nil.
14 June 2022	No major observations were recorded on the reporting day.	Nil.
21 June 2022	No major observations were recorded on the reporting day.	Nil.
28 June 2022	No major observations were recorded on the reporting day.	Nil.

7.4. According to the EIA Study Report, Environmental Permit, contract documents and EM&A Manual, the mitigation measures detailed in the documents should be implemented as much as practical during the reporting period. An updated Implementation Status of Environmental Mitigation Measures (EMIS) is provided in **Appendix C**. Site inspection proforma of the reporting period is provided in **Appendix I**.

8. FUTURE KEY ISSUES

8.1. Works to be undertaken in the next reporting month are:

- 132kV adjacent underground utility construction
- Construction of Reverse Osmosis (RO) Building - staircases and internal finishing;
- Construction of sludge thickener, Post Treatment Building (PTB);
- Internal finishing work for On-Site Chlorine Generation Building (OSCG Bldg) and Product Water Storage Tank (PWST), Main Electrical & Central Chiller Plant Building;
- Manhole construction and GRP pipe installation;
- Design for Manufacture and Assembly at PWST and RO Building;
- Installation of louvre, metal doors and timber doors in MECCP;
- Construction of 3/F to 4/F walls and columns of Administration Building;
- Installation of curtain wall supports of Administration Building;
- Construction of columns and beams of FT-5, FT6, FT7 and FT-8 at Inspection Corridor;
- Construction of Stair Tower at Inspection Corridor;
- Construction of Side Tanks No. 5-8 at ActiDAFF;
- Installation of GRP Casts in Media Chambers co. 9-16 at ActiDAFF;
- Carrying out of Finishing works in the Plant Room at Chemical Building;
- Installation of marine structure and Dewater at Outfall Shaft;
- Installation of marine intake structure at Intake Shaft;
- Permanent structure construction at Combined Shaft;
- Excavation at slope toe;
- Trench excavation and structure installation at Open Channel;
- E&M works – ActiDAFF – scaffolding, installation of mechanical equipment and piping;
- E&M works –RO Building – installation of building services, steel pipe, Glass fiber reinforced plastics pipe;
- E&M works – Product Water Building – installation of building services;
- E&M works – Post Treatment Building – installation of building services, mechanical equipment and piping; and
- E&M works – Administration Building - installation of building services

8.2. The major environmental impacts brought by the above construction works will include:

- Construction dust and noise generation from pipe jacking works, excavation and construction works;
- Waste generation from construction activities; and
- Impact on water quality from marine construction works and inland construction works.

8.3. The key environmental mitigation measures for the Project in the coming reporting period associated with the above construction works will include:

- Dust suppression by regular wetting and water spraying for construction works
- Reduction of noise from equipment and machinery on-site by regular checking of on-site plant/vehicle to ensure proper functioning
- Sorting and storage of general refuse and construction waste
- Deployment of temporary silt curtain in the area where marine construction works were conducted and deployment of water sedimentation tanks for treatment of wastewater at inland and marine areas before discharge

9. CONCLUSIONS AND RECOMMENDATIONS

- 9.1. This is the 28th Monthly EM&A Report for the Project which summarizes the key findings of the EM&A programme during the reporting period from 1 June to 30 June 2022, in accordance with the EM&A Manual and the requirement under FEP-01/503/2015/A.
- 9.2. No noise monitoring was conducted in the reporting period due to the over distant monitoring station from the works location, in which construction activities were not undertaken within a radius of 300m from the monitoring locations.
- 9.3. The EM&A works for water quality were conducted during the reporting period in accordance with the EM&A Manual.
- 9.4. Fourteen (14) of the general water quality monitoring results of suspended solids (SS) obtained had exceeded the Action Level. Nine (9) of the general water quality monitoring results of SS obtained during the reporting period had exceeded the Limit Level. Details of the exceedance are presented in **Appendix O**.
- 9.5. Investigation on the reason of exceedance has been carried out, where the exceedances of SS on 7, 11, 13, 15, 17 and 28 June 2022 were concluded to be unrelated to the Contract as detailed in the Incident Reports on Action Level or Limit Level Non-compliance along with supporting materials in **Appendix O**.
- 9.6. It was concluded that all exceedances recorded in the reporting month were unrelated to the project.
- 9.7. In this reporting period, no landfill gas monitoring was conducted in the reporting month.
- 9.8. Weekly environmental site inspection was conducted during the reporting period. No major deficiency was observed during site inspection. The environmental performance of the project was therefore considered satisfactory.
- 9.9. According to the environmental site inspections performed in the reporting month, the Contractor is reminded to pay attention on maintaining proper materials storage, site hygiene and dust suppression mitigation measures.
- 9.10. No environmental complaint, notification of summons and prosecution was received in the reporting period.
- 9.11. The ET will keep track on the construction works to confirm compliance of environmental requirements and the proper implementation of all necessary mitigation measures.

Appendix A

Construction Programme

Activity ID	Activity Name	Baseline Duration	Baseline Start	Baseline Finish	Remaining Duration	Actual / Planned Start	Actual / Planned Finish	Actual % Complete	Variance Finish Date	Total Float	2020												2021												2022												2023											
											N	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	F	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	F	Mar	Apr	May	Jun	Jul	Aug	2020	2021	2022	2023										
Project Programme Updated as at 31 January 2022 (Level 2)																																																										
Key Dates																																																										
Commencement and Completion Date																																																										
KD0000100	Letter of Acceptance	0	15-Nov-19		0	15-Nov-19 A		100%	0		◆ Letter of Acceptance																																															
KD0000110	Commencement of the Works	0	30-Dec-19		0	30-Dec-19 A		100%	0		◆ Commencement of the Works																																															
KD0000120	Completion of the Works (1170 Days)	0		13-Mar-23	0		13-Mar-23	0%	0	0																									◆ Completion of the Work																							
KD0000130	Revised Completion of the Works (183 Days EOT Granted)	0			183	14-Mar-23	12-Sep-23	0%	0	0																																																
KD0000510	Planned Completion of the Works	0			0		30-Sep-23	0%		-18																																																
KD0000520	Target Completion of the Works (Best Endeavour)	0			0		02-Jul-23	0%		72																																					◆ Target											
Executive Summaries																																																										
Preliminary Setup																																																										
ES0001000	Mobilization and Preliminary Set Up	191	30-Dec-19	07-Jul-20	0	30-Dec-19 A	20-Jul-20 A	100%	-13		Mobilization and Preliminary Set Up																																															
Civil Design AIP and DDA																																																										
ES0001010	AIP Civil Design Submission and Approval	330	30-Dec-19	23-Nov-20	0	30-Dec-19 A	31-Aug-20 A	100%	84		AIP Civil Design Submission and Approval																																															
ES0001020	DDA Civil Design Submission and Approval	414	28-Feb-20	16-Apr-21	0	22-Jan-20 A	01-Sep-21 A	100%	-138		DDA Civil Design Submission and Approval																																															
M&E Design AIP and DDA																																																										
ES0002000	M&E AIP Process Mechanical Submission and Approval	477	30-Dec-19	19-Apr-21	0	30-Dec-19 A	22-Dec-20 A	100%	118		M&E AIP Process Mechanical Submission and Approval																																															
ES0002010	M&E DDA Process Mechanical Submission and Approval	679	08-Feb-20	17-Dec-21	0	21-Jul-20 A	02-Sep-21 A	100%	106		M&E DDA Process Mechanical Submission and Approval																																															
ES0002020	M&E AIP Instrumentation & Control Submission and Approval	607	31-Jan-20	28-Sep-21	0	04-Feb-20 A	25-Feb-20 A	100%	581		M&E AIP Instrumentation & Control Submission and Approval																																															
ES0002030	M&E DDA Instrumentation & Control Submission and Approval	514	22-Jul-20	17-Dec-21	97	13-Feb-21 A	08-May-22	65%	-142	172	M&E DDA Instrumentation & Control Submission and Approval, M&E																																															
ES0002050	M&E DDA Electrical and Renewable Energy Submission and Approval	382	16-Aug-20	01-Sep-21	0	17-Aug-20 A	31-Dec-20 A	100%	244		M&E DDA Electrical and Renewable Energy Submission and Approval																																															
ES0002060	M&E AIP Building Services Submission and Approval	226	30-Dec-19	11-Aug-20	0	30-Dec-19 A	30-Oct-20 A	100%	-80		M&E AIP Building Services Submission and Approval																																															
ES0002065	M&E Design Basis & Civil Guidance Dwg	112	30-Dec-19	19-Apr-20	0	30-Dec-19 A	24-Jul-20 A	100%	-96		M&E Design Basis & Civil Guidance Dwg																																															
ES0002070	M&E DDA Building Services Submission and Approval	306	28-Feb-20	29-Dec-20	0	01-Mar-20 A	30-Jun-21 A	100%	-183		M&E DDA Building Services Submission and Approval																																															
ES0002085	M&E AIP Site Electrical Submission and Approval	155	09-Jun-20	10-Nov-20	0	21-Mar-20 A	22-Jul-20 A	100%	111		M&E AIP Site Electrical Submission and Approval																																															
ES0002090	M&E DDA Lift Submission and Approval	140	27-Aug-20	13-Jan-21	0	01-Oct-20 A	12-May-21 A	100%	-119		M&E DDA Lift Submission and Approval																																															
ES0002095	M&E DDA Site Electrical Submission and Approval	140	11-Nov-20	30-Mar-21	0	23-Jul-20 A	04-Jun-21 A	100%	-66		M&E DDA Site Electrical Submission and Approval																																															
ES0002100	M&E DDA T&C Design Submission and Approval	155	29-Mar-22	30-Aug-22	35	01-Aug-21 A	07-Mar-22	75%	176	220	M&E DDA T&C Design Submission and Approval, M																																															
Procurement of Major Plant & Equipment Schedule																																																										
ES0002320	M&E Procurement of Major Plant, Equipment, Material and Delivery	901	14-Mar-20	31-Aug-22	184	04-Feb-20 A	03-Aug-22	73%	28	83	M&E Procurement of Major Plant, Equipment, Mater																																															
ES2420	M&E Procurement of Mechanical Equipment - Intake Pumps	595	18-May-20	02-Jan-22	133	04-Feb-20 A	13-Jun-22	70%	-162	15	M&E Procurement of Mechanical Equipment - Intake Pumps, M																																															
ES2430	M&E Procurement of Mechanical Equipment - ActiDAFF Underdrain	333	30-Oct-20	27-Sep-21	32	02-Aug-20 A	04-Mar-22	90%	-158	79	M&E Procurement of Mechanical Equipment - ActiDAFF Underdrain, M&E Proc																																															
ES2440	M&E Procurement of Mechanical Equipment - ActiDAFF Media	298	15-Mar-21	06-Jan-22	139	23-Jul-20 A	19-Jun-22	50%	-164	126	M&E Procurement of Mechanical Equipment - ActiDAFF Media																																															
ES2450	M&E Procurement of Mechanical Equipment - RO and ERD Rack	274	22-Feb-21	22-Nov-21	0	22-Jul-20 A	28-Dec-21 A	100%	-36		M&E Procurement of Mechanical Equipment - RO and ERD Rack																																															
ES2460	M&E Procurement of Mechanical Equipment - RO Membrane	755	29-Mar-20	22-Apr-22	225	12-Feb-20 A	13-Sep-22	62%	-144	161	M&E Procurement of Mechanical Equipment - RO																																															
ES2470	M&E Procurement of Electrical Equipment - CLP Substation for LV Switchboard / Genset / Building Services	300	14-Mar-20	07-Jan-21	0	14-Mar-20 A	28-Feb-21 A	100%	-52		M&E Procurement of Electrical Equipment - CLP Substation for LV Switchboard / Genset / Building Services																																															
132kV Substation																																																										
ES0001460	Excavation and Formation Works for 132kV Substation	15	16-Mar-20	30-Mar-20	0	19-Feb-20 A	23-Apr-20 A	100%	-24		Excavation and Formation Works for 132kV Substation																																															
ES0001470	Construction of 132kV Substation	233	31-Mar-20	18-Nov-20	0	27-Apr-20 A	30-Dec-20 A	100%	-42		Construction of 132kV Substation																																															
ES0001480	Architectural Finishes for 132kV Substation	126	11-Sep-20	14-Jan-21	0	23-Nov-20 A	22-Mar-21 A	100%	-67		Architectural Finishes for 132kV Substation																																															
ES0002240	M&E Installation of 132kV Substation	93	20-Nov-20	20-Feb-21	0	01-Dec-20 A	22-Mar-21 A	100%	-30		M&E Installation of 132kV Substation																																															
Combine Shaft																																																										
ES0001060	Construction of Combine Shaft	257	27-Mar-20	08-Dec-20	0	02-May-20 A	30-Jun-21 A	100%	-204		Construction of Combine Shaft																																															

Activity ID	Activity Name	Baseline Duration	Baseline Start	Baseline Finish	Remaining Duration	Actual / Planned Start	Actual / Planned Finish	Actual % Complete	Variance Finish Date	Total Float	2020												2021												2022												2023												
											N	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	F	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	F	Mar	Apr	May	Jun	Jul	Aug															
Switch Room and Transformer Installation																																																											
ES0002300	M&E Installation of HV/LV Switchroom and Transformer	242	16-Nov-21	15-Jul-22	187	14-May-22	16-Nov-22	0%	-124	110	M&E Installation of HV/LV Switchroom and Transformer																																																
Miscellaneous																																																											
ES0001630	Remaining Architectural Finishes for All Buildings	322	11-Jan-22	28-Nov-22	314	02-Jul-22	11-May-23	0%	-164	36	Remaining Architectural Finishes for All Buildings																																																
ES0001640	External Process and Non-Process Pipe	655	18-Dec-20	03-Oct-22	322	27-May-21 A	19-Dec-22	12%	-77	-9	External Process and Non-Process Pipe																																																
ES0001650	Drainage and Cable Duct	518	04-Jun-21	03-Nov-22	184	14-Mar-22	13-Sep-22	0%	51	23	Drainage and Cable Duct																																																
ES0001660	Slope Mitigation and Maintenance Access	684	23-Nov-20	07-Oct-22	490	28-Sep-21 A	05-Jun-23	2%	-241	81	Slope Mitigation and Maintenance Access																																																
ES0001670	Landscaping Works	469	28-Oct-21	08-Feb-23	233	13-Oct-22	02-Jun-23	0%	-114	18	Landscaping Works																																																
ES0002290	M&E PV Panels	215	23-Nov-21	25-Jun-22	134	17-May-22	27-Sep-22	0%	-94	31	M&E PV Panels																																																
ES0002310	M&E Chiller & Irrigation System Installation	298	27-Oct-21	20-Aug-22	199	19-Mar-22	03-Oct-22	0%	-44	3	M&E Chiller & Irrigation System Installation																																																
ES0002350	M&E Installation of Surge Vessel	70	24-Feb-22	04-May-22	285	14-Jun-22	25-Mar-23	0%	-325	18	M&E Installation of Surge Vessel																																																
ES0002360	M&E Installation of Flowmeter Pit	70	24-Feb-22	04-May-22	65	14-Jun-22	17-Aug-22	0%	-105	72	M&E Installation of Flowmeter Pit																																																
ES0002370	M&E Installation of Static Mixer Pit	42	27-Jan-22	09-Mar-22	37	27-Jun-22	02-Aug-22	0%	-146	87	M&E Installation of Static Mixer Pit																																																
ES0002380	M&E Installation of Drainage Pit	30	23-Nov-21	22-Dec-21	32	20-May-22	20-Jun-22	0%	-180	101	M&E Installation of Drainage Pit																																																
ES0002390	M&E Installation of Thickened Sludge Holding Tank	42	09-Dec-21	19-Jan-22	44	08-Apr-22	21-May-22	0%	-122	160	M&E Installation of Thickened Sludge Holding Tank																																																
Statutory Submission & Inspection																																																											
ES0002330	Statutory Submission & Inspection	1148	11-Jan-20	03-Mar-23	511	03-Dec-19 A	26-Jun-23	57%	-115	1	Statutory Submission & Inspection																																																
Testing and Commissioning																																																											
ES0002400	M&E Precommissioning	229	12-Jun-22	26-Jan-23	237	21-Sep-22	15-May-23	0%	-109	-18	M&E Precommissioning																																																
ES0002410	M&E Commissioning	213	04-Jul-22	01-Feb-23	224	12-Oct-22	23-May-23	0%	-111	-18	M&E Commissioning																																																
ES0002420	M&E Performance Test	40	02-Feb-23	13-Mar-23	130	24-May-23	30-Sep-23	0%	-201	-18	M&E Performance Test																																																

Appendix B


Overview of Desalination Plant in Tseung Kwan O

LEGEND:

- BOUNDARY OF SENT LANDFILL EXTENSION
- BOUNDARY OF WORKS AREA FOR TKO DESALINATION PLANT
- - - SITE PHASING
- ALLOCATED LAND BOUNDARIES

NOTE:

TEMPORARY WORKS AREA 1 WILL BE HANDED OVER AT +6 MPD WITH A TOLERANCE OF ±500mm.

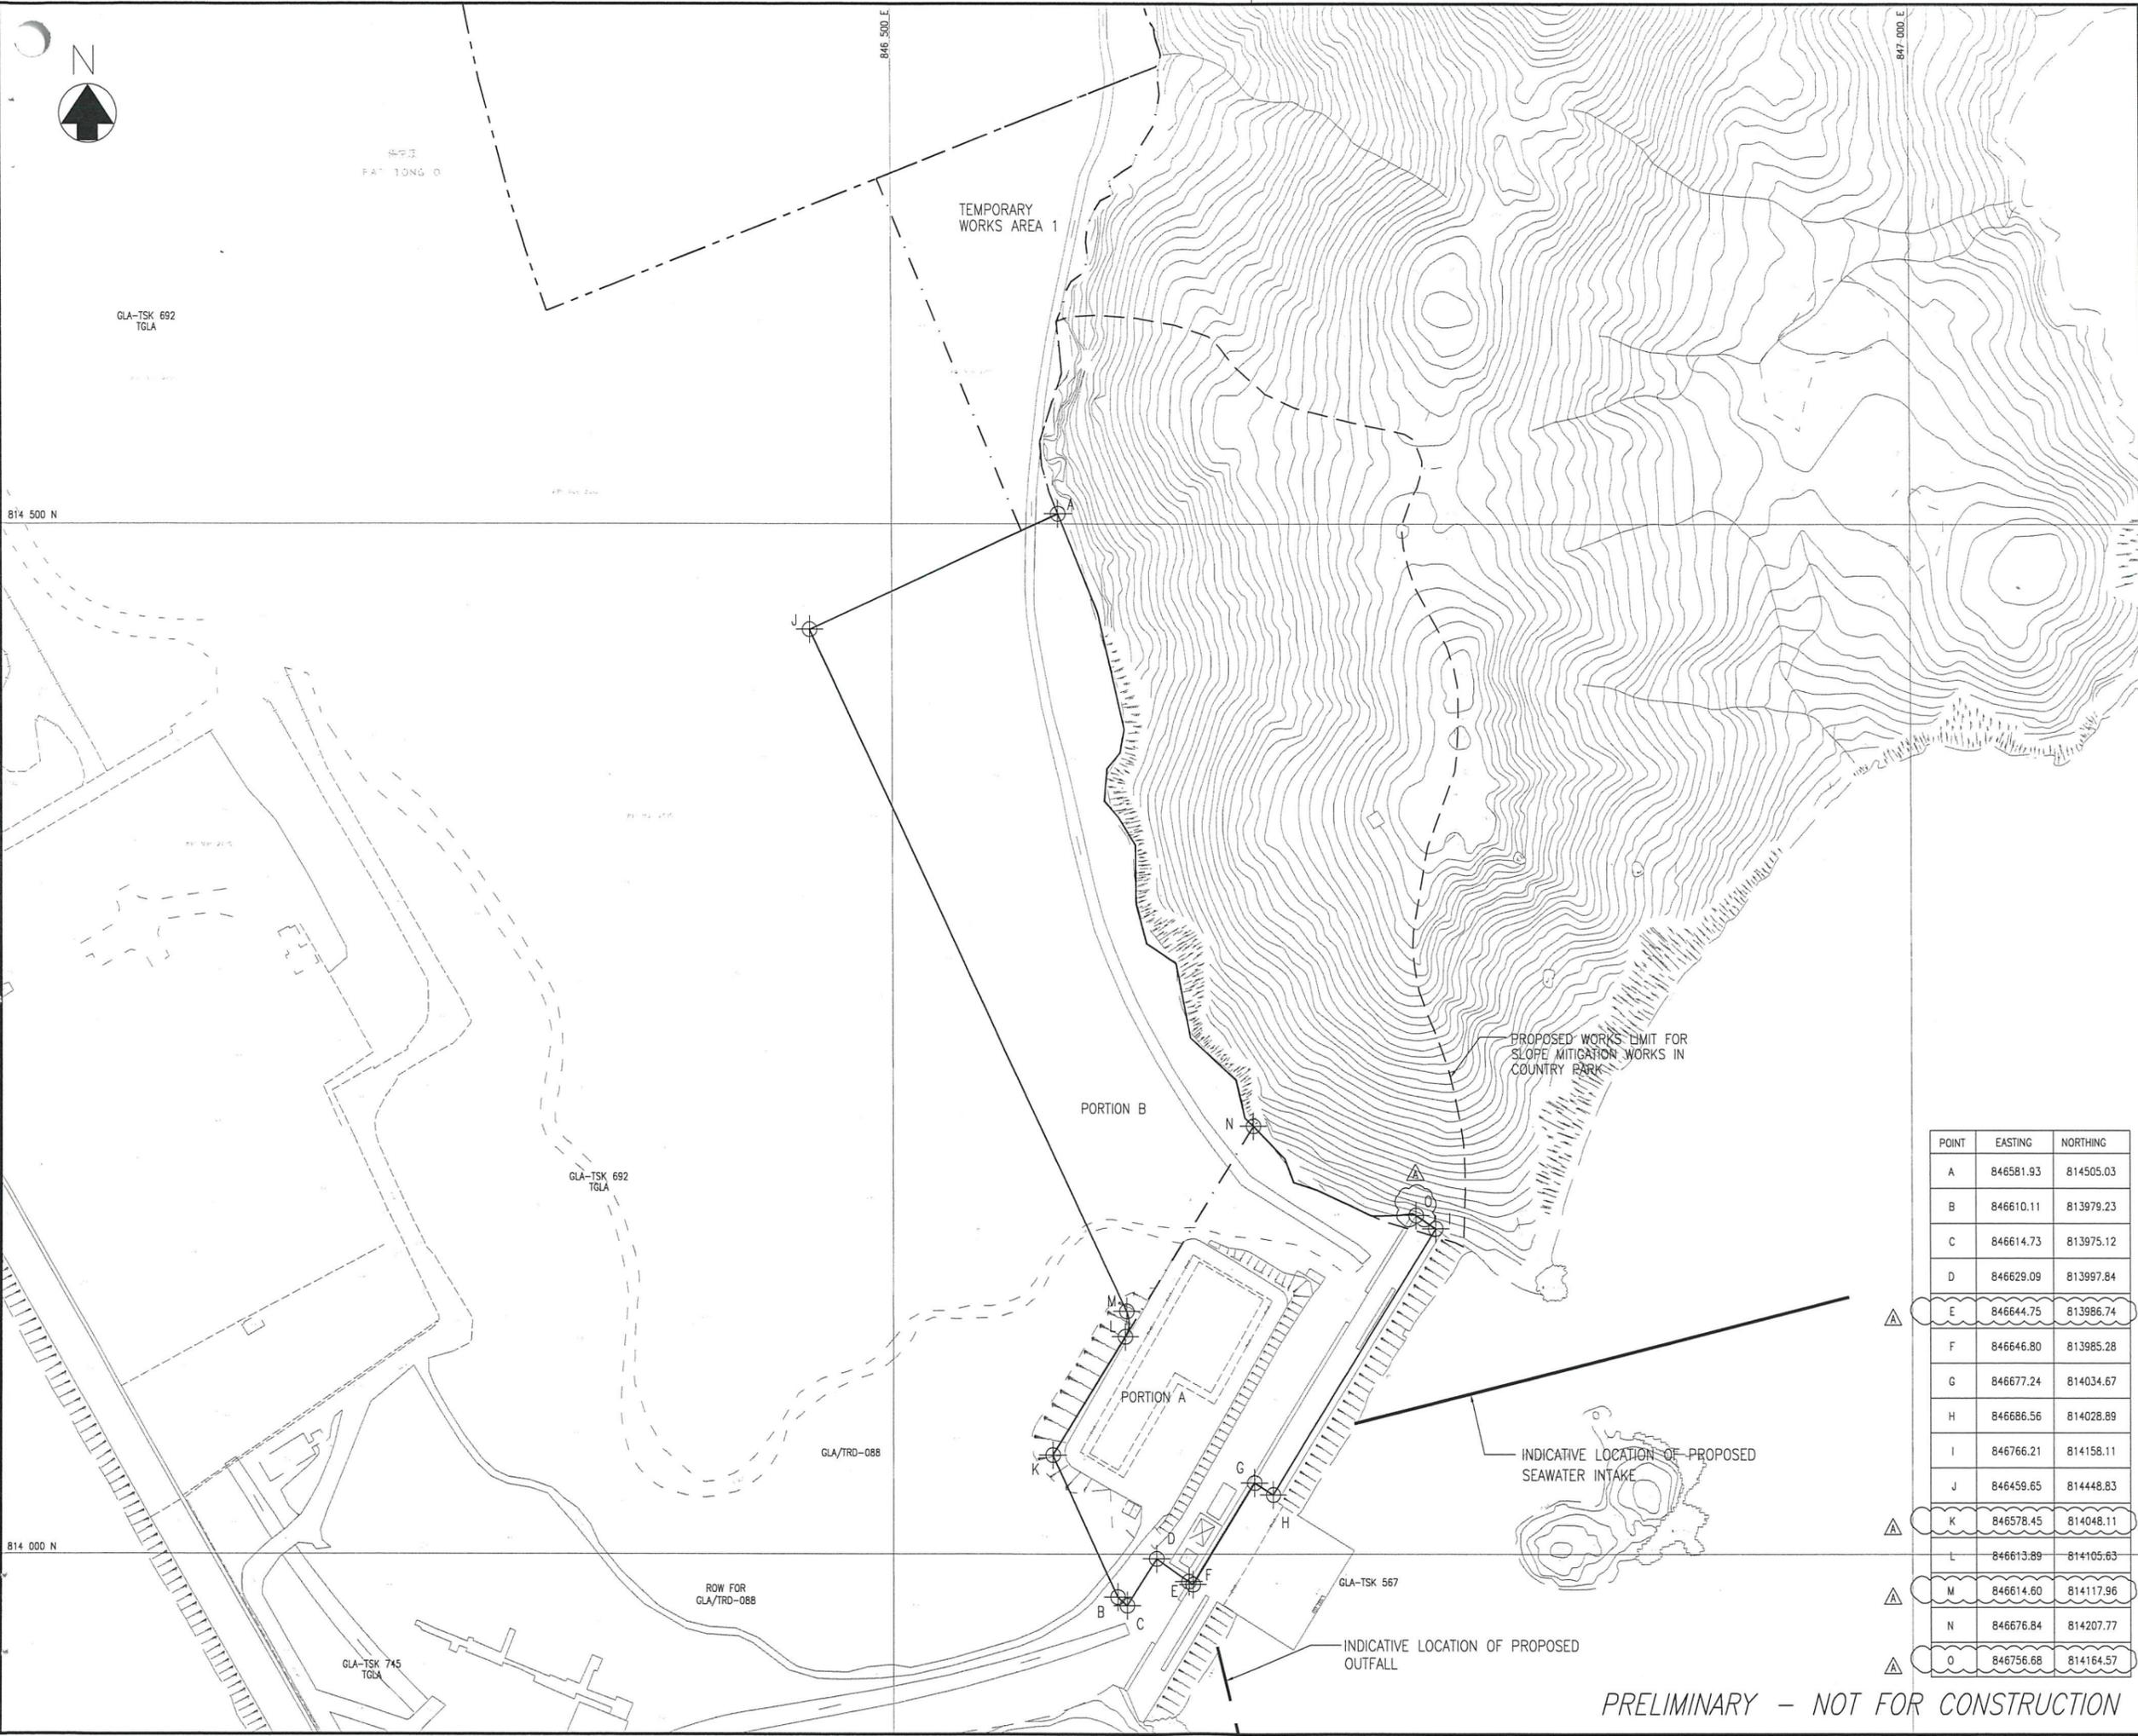

B	10/03	UPDATE NOTES	YLC
A	07/18	UPDATE COORDINATES	YLC
Revision	Date	Description	Initial
	Designed	Checked	Drawn
Initial	YLC	CKH	SZ
Date	02/18	02/18	02/18

Approved
Christina Go

Agreement No. CE 8/2015 (WS)

Contract No. 13/WSD/17

Contract Title
DESIGN, BUILD AND OPERATE FIRST STAGE OF TSEUNG KWAN O DESALINATION PLANT

Drawing Title
SITE HANDOVER WORKS AREAS

Drawing No.	Revision
190495/K/TEND/10/0003	B

Scale A1 1 : 1500
A3 1 : 3000



POINT	EASTING	NORTHING
A	846581.93	814505.03
B	846610.11	813979.23
C	846614.73	813975.12
D	846629.09	813997.84
E	846644.75	813986.74
F	846646.80	813985.28
G	846677.24	814034.67
H	846686.56	814028.89
I	846766.21	814158.11
J	846459.65	814448.83
K	846578.45	814048.11
L	846613.89	814105.63
M	846614.60	814117.96
N	846676.84	814207.77
O	846756.68	814164.57

PRELIMINARY - NOT FOR CONSTRUCTION

BUILDINGS IN FIRST STAGE

CODE	NAME OF BUILDING	TOTAL G.F.A. (m ²)	SITE COVERAGE (m ²)
B	COMBINE SHAFT	759,876	759,876
C	ACTIDAFF	10027,547	5455,346
G	REVERSE OSMOSIS BUILDING AND ELECTRICAL BUILDING	4511,455	5367,935
H	CO2 TANKS AREA	-	-
J	PRODUCT WATER STORAGE TANK, PUMP STATION AND ELECTRICAL BUILDING	1974,610	2933,980
K	SLUDGE TREATMENT BUILDING, TANK AND PUMP ROOM	2531,044	1228,361
M	ADMINISTRATION BUILDING & ELECTRICAL BUILDING C	2450,713	1114,062
N	MAIN ELECTRICAL AND CENTRAL CHILLER PLANT BUILDING	-	499,893
R1	ELECTROCHLORINATION BUILDING & ELECTRICAL BUILDING A	657,992	825,776
S	132 KV SUBSTATION	-	943,560
T	IRRIGATION WATER TANK AND PUMP ROOM	-	156,148
R2	CHEMICAL BUILDING	813,056	813,056
V	VISITOR GALLERY	1330,410	1330,410
X1	GUARD HOUSE AND FS CONTROL ROOM	39,585	39,585
X2	GUARD HOUSE	22,035	22,035
Y	R + D OUTDOOR	-	-
Z	WASTE WATER TREATMENT PLANT	48,000	48,000
TOTAL =		25175,323	21490,023

LEGEND / ABBREVIATION


- H.L. WINDOW HIGH LEVEL WINDOW
- M.L. METAL LOUVRES
- C.L. CAT LADDER
- A.U.T. ACCESSIBLE UNISEX TOILET
- ⊕ PROPOSED FINISH FLOOR LEVEL IN METER ABOVE P.D.
- ⊕ STRUCTURAL FLOOR LEVEL IN METER ABOVE P.D.
- M.V.I.A.L. MECHANICAL VENTILATION & ARTIFICIAL LIGHTING
- F.E. 4.5kg CO₂ FIRE EXTINGUISHER
- H.R. HOSE REEL
- ⊕ FIREMANS LIFT
- ⊕ LIFT FOR THE BARRIER FREE ACCESS
- P.D. PIPE DUCT

PLOT RATIO & SITE COVERAGE CALCULATION:

SITE AREA OF THE FIRST STAGE	=	56108 m ²
TOTAL G.F.A.	=	25092.141 m ²
TOTAL SITE COVERAGE	=	21414.841 m ²
PLOT RATIO	=	25092.141 / 56108
	=	0.447 < PERMITTED
SITE COVERAGE	=	21414.841 / 56108 x 100
	=	38.167%


SITE LOCATION PLAN

1 : 5000

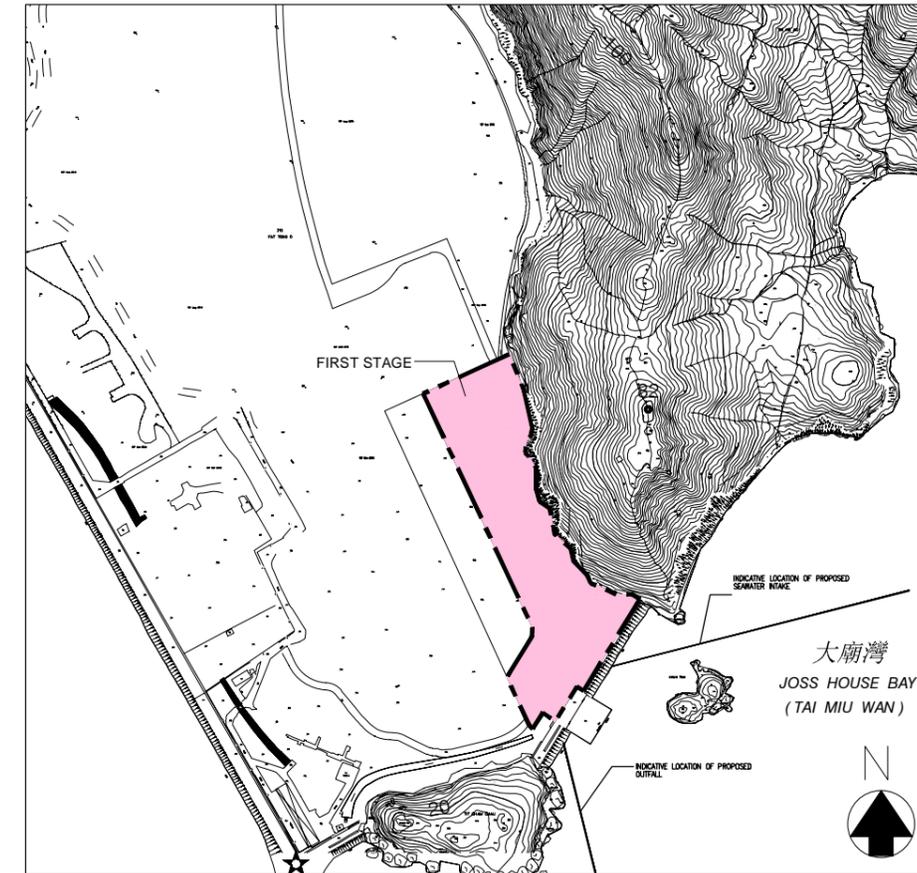

FIRST STAGE OF TSEUNG KWAN O DESALINATION PLANT

1 : 1000

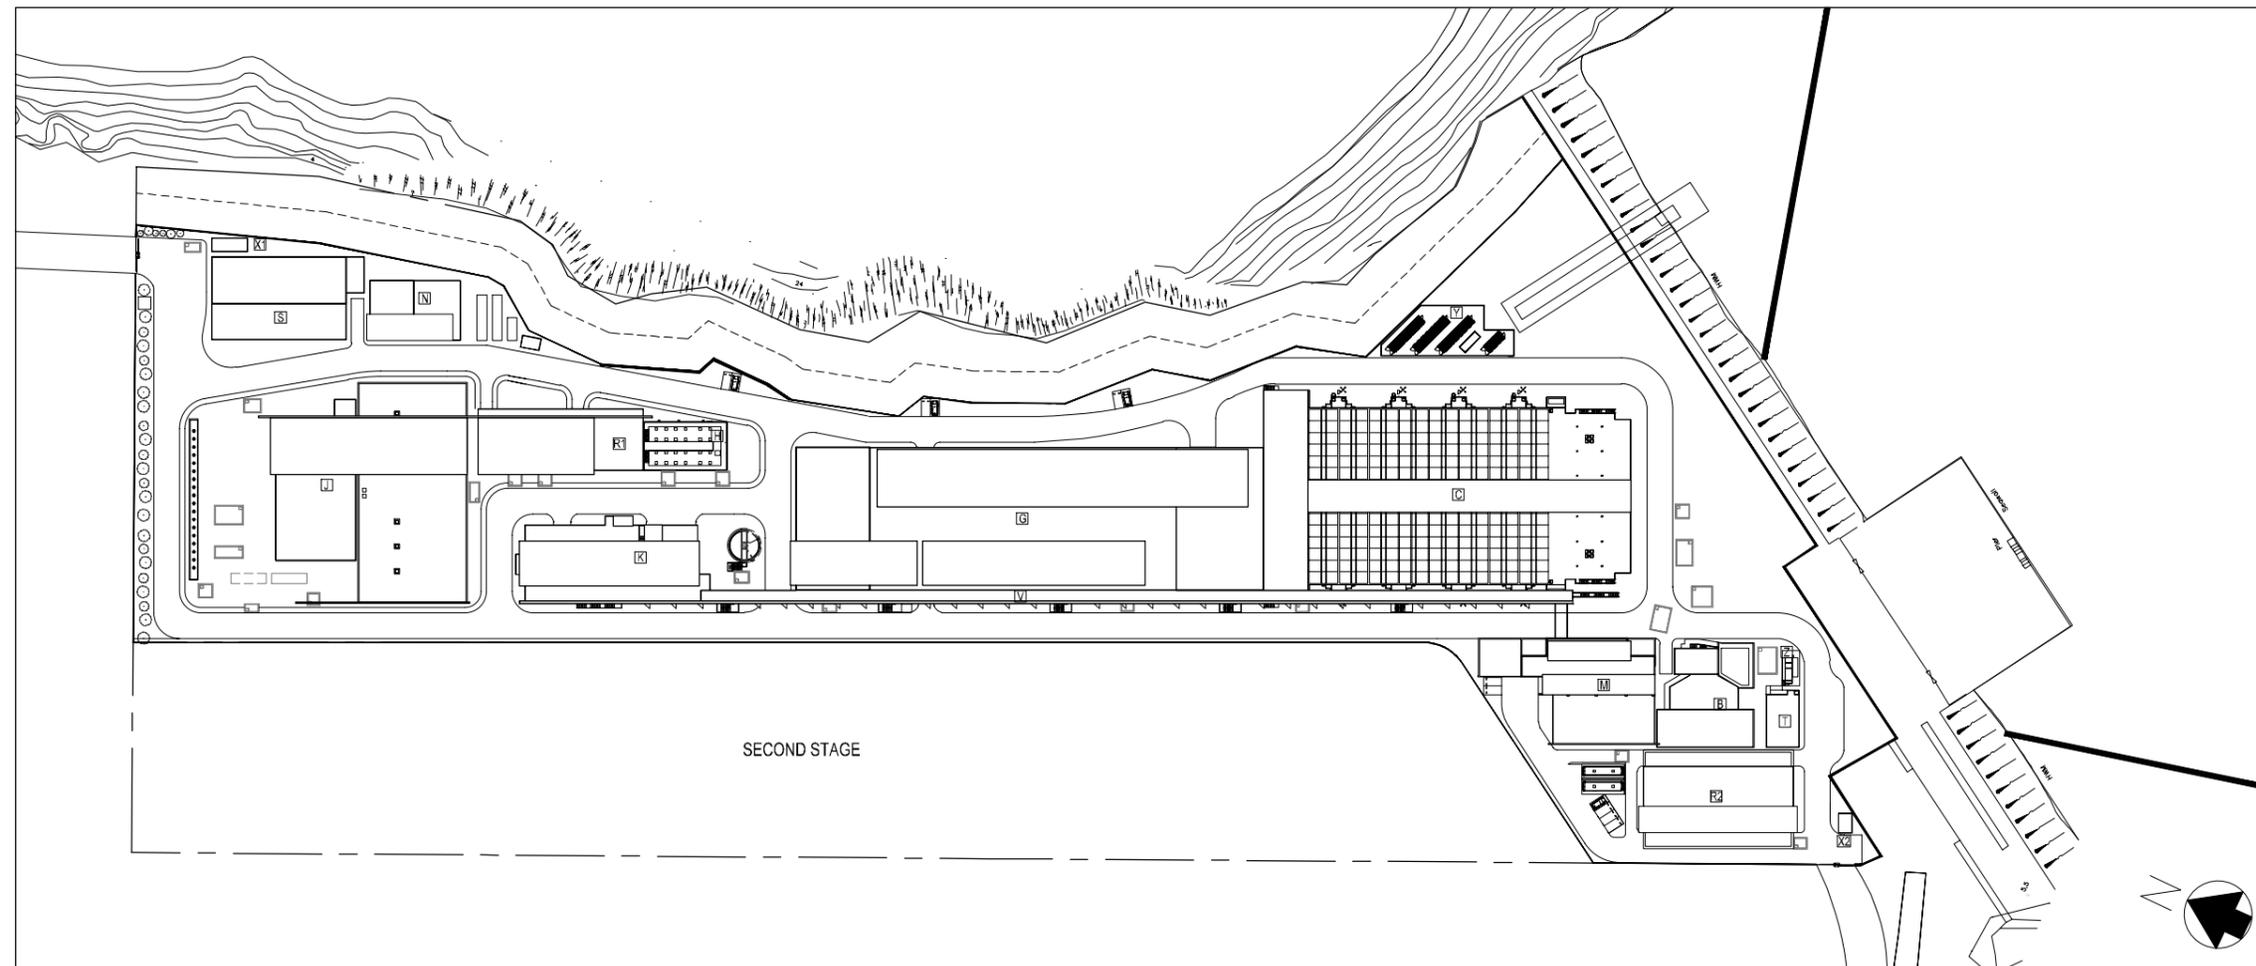

0	TENDER SUBMISSION	CAD	JAN 19
Rev	Description	By	Date
Employer			
Employer's Consultant			
Tenderer			
Designer			
Project title			
CONTRACT NO. 13/WSD/17			
DESIGN, BUILD AND OPERATE FIRST STAGE OF TSEUNG KWAN O DESALINATION PLANT			
Drawing title			
ARCHITECTURAL – PLOT RATIO AND SITE COVERAGE CALCULATION, LEGEND ABBREVIATION			
Drawing no.		Rev.	
TKO/AJC/W/A000/AR/001		0	
Drawn	Date	Checked	Approved
OKAL	JAN 19	S.C.	T.C.
Scale	N.T.S.	Status	-

Appendix C

Summary of Implementation Status of Environmental Mitigation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
Air Quality								
S4.8.1	Impervious dust screen or sheeting will be provided to enclose scaffolding from the ground floor level of building for construction of superstructure of the new buildings.	Land site/ During Construction	Contractor(s)		✓		Implemented	Air Pollution Control (Construction Dust)
S4.8.1	Impervious sheet will be provided for skip hoist for material transport.	Land site/ During Construction, particularly dry season	Contractor(s)		✓		NA	-
S4.8.1	The area where dusty work takes place should be sprayed with water or a dust suppression chemical immediately prior to, during and immediately after dusty activities as far as practicable.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	All dusty materials should be sprayed with water or a dust suppression chemical immediately prior to any loading, unloading or transfer operation.	Land site/ During Construction	Contractor(s)		✓		Implemented, reminded issued	-
S4.8.1	Dropping heights for excavated materials should be controlled to a practical height to minimize the fugitive dust arising from unloading.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	During transportation by truck, materials should not be loaded to a level higher than the side and tail boards, and should be dampened or covered before transport.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	Wheel washing device should be provided at the exits of the work sites. Immediately before leaving a construction site, every vehicle shall be washed to remove any dusty material from its body and wheels as far as practicable.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	Road sections between vehicle-wash areas and vehicular entrance will be paved.	Land site/ During Construction	Contractor(s)		✓		Implemented	-
S4.8.1	Hoarding of not less than 2.4m high from ground level will be provided along the length of the Project Site boundary.	Land site/ During construction	Contractor(s)	✓	✓		N/A	-
S4.8.1	Haul roads will be kept clear of dusty materials and will be sprayed with water so as to maintain the entire road surface wet at all times.	Land site/ During construction	Contractor(s)		✓		Implemented, reminded issued	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S4.8.1	Temporary stockpiles of dusty materials will be either covered entirely by impervious sheets or sprayed with water to maintain the entire surface wet all the time.	Land site/ During construction	Contractor(s)		✓		Implemented	-
S4.8.1	Stockpiles of more than 20 bags of cement, dry pulverised fuel ash and dusty construction materials will be covered entirely by impervious sheeting sheltered on top and 3-sides.	Land site/ During construction	Contractor(s)		✓		N/A	-
S4.8.1	All exposed areas will be kept wet always to minimise dust emission.	Land site/ During construction	Contractor(s)		✓		Implemented	-
S4.8.1	Ultra-low-sulphur diesel (ULSD) will be used for all construction plant on-site, as defined as diesel fuel containing not more than 0.005% sulphur by weight) as stipulated in Environment, Transport and Works Bureau Technical Circular (ETWB-TC(W)) No 19/2005 on Environmental Management on Construction Sites.	Land site/ During construction/ During Operation	Contractor(s)		✓	✓	Implemented	Environment, Transport and Works Bureau Technical Circular (ETWB-TC(W)) No 19/2005 on Environmental Management on Construction Sites
S4.8.1	The engine of the construction equipment during idling will be switched off.	Land site/ During construction	Contractor(s)		✓		Implemented	-
S4.8.1	Concrete batching plant will be required on site. control measures recommended in the Guidance Note on a Best Practicable Means for Cement Works (Concrete Batching Plant) (BPM 3/2 (93)) will be implemented. The control measures recommended in the Guidance Note on a Best Practicable Means for Cement Works (Concrete Batching Plant) (BPM 3/2 (93)) will be implemented.	Land site/ During construction	Contractor(s)		✓		N/A	-
S4.8.1	Regular maintenance of construction equipment deployed on-site will be conducted to prevent black smoke emission.	Land site/ During construction	Contractor(s)		✓		Implemented	-
S4.10	To ensure proper implementation of the recommended dust mitigation measures and good construction site practices during the construction phase, environmental site audits on weekly basis is recommended throughout the construction period.	Land site/ During construction	Contractor(s)/ Environmental Team (ET) & Independent Environmental Checker (IEC)		✓		Implemented	-

Note: D – Design stage C – Construction O – Operation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
Noise								
S5.7	Only well-maintained plant will be operated on-site and plant will be serviced regularly during the construction phase.	All area/ During construction	Contractor(s)		✓		Implemented	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Silencers or mufflers on construction equipment will be utilised and will be properly maintained during the construction phase.	Noise control/ During construction	Contractor(s)		✓		N/A	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Mobile plant, if any, will be sited as far away from NSRs as possible.	Noise control/ During construction	Contractor(s)		✓		N/A	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or will be throttled down to a minimum.	Noise control/ During construction	Contractor(s)		✓		Implemented	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Plants known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.	Noise control/ During construction	Contractor(s)		✓		N/A	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities.	Noise control/ During construction	Contractor(s)		✓		N/A	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Use of Quite Powered Mechanical Equipment (QPME).	Noise control/ During construction	Contractor(s)		✓		Implemented	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Movable noise barriers of 3m in height with skid footing should be used and located within a few metres of stationary plant and mobile plant such that the line of sight to the NSR is blocked by the barriers. The length of the barrier should be at least five times greater than its height. The noise barrier material should have a superficial surface density of at least 7 kg m ⁻² and have no or gappenings.	Noise control/ During construction	Contractor(s)		✓		N/A	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	The noise insulating sheet should be deployed such that there would be no opening or gaps on the joints.	Noise control/ During construction	Contractor(s)		✓		N/A	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Construction activities (e.g. excavation/shoring, reinstatement (asphalt), and pipe jacking) will be planned and carried out in sequence, such that items of PME proposed for these activities will not be operated simultaneously.	Noise control/ During construction	Contractor(s)	✓	✓		Implemented	A Practical Guide for the Reduction of Noise from Construction Works

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S5.7	PMEs will not be used at the works areas near educational institutions with residual impact (ie the "influence area" within a radius of 40m) during school hours in order to reduce impact to the educational institutions.	Noise control / During construction	Contractor(s)		✓		N/A	A Practical Guide for the Reduction of Noise from Construction Works
S5.7	Noise enclosures or acoustic sheds would be used to cover stationary PME such as generators. Portable/Movable noise enclosure made of material with superficial surface density of at least 7 kg m-2 may be used for screening the noise from operation of the saw/groover, concrete.	Noise control/ Pre-construction/ During construction	Contractor(s)	✓	✓		N/A	-
S5.9	Sawcutting pavement, breaking up of pavement, excavation /shoring, pipe laying, backfilling, reinstatement (concrete) and pipe jacking shall be scheduled outside the examination period.	Noise control/ Pre-construction/ During construction	Contractor(s)	✓	✓		N/A	-
S5.9	In view the duration of noise exceedance at Creative Secondary School, PLK Laws Foundation College, TKO Kei Tak Primary School and School of Continuing and Professional Studies-CUHK is limited to 8 weeks, the construction work in the influence areas near the four schools shall be scheduled during long school holidays (eg summer holiday, Easter holiday or Christmas holiday, etc) as far as practicable. Scheduling the construction work for the four schools.	Noise control/ Pre-construction/ During construction	Contractor(s)	✓	✓		N/A	-
S5.10	A noise monitoring programme shall be implemented for the construction phase.	Designated monitoring stations as defined in EM&A Manual/During construction phase	Environmental Team		✓		N/A	-
S5.10	The effectiveness of on-site control measures could also be evaluated through the regular site audits.	All facilities/ During construction	Contractor(s)/ ET & Independent Environmental Checker (IEC)		✓		Implemented	-

Note: D – Design stage C – Construction O – Operation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
Water Quality								
S6.9	Dredged marine sediment will be disposed of in a gazetted marine disposal area in accordance with marine dumping permit conditions of the Dumping at Sea Ordinance (DASO).	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	Dumping at Sea Ordinance (DASO)
S6.9	Disposal vessels will be fitted with tight bottom seals in order to prevent leakage of material during transport.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	Barges will be filled to a level, which ensures that material does not spill over during transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	After dredging, any excess materials will be cleaned from decks and exposed fittings before the vessel is moved from the dredging area.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	All vessels should be well maintained and inspected before use to limit any potential discharges to the marine environment.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	All vessels must have a clean ballast system.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	No discharge of sewage/grey wastewater should be allowed. Waste water from potentially contaminated area on working vessels should be minimized and collected. These kinds of wastewater should be brought back to port and discharged at appropriate collection and treatment system.	Marine Dredging/ During construction	Contractor(s)		✓		Implemented	-
S6.9	No soil waste is allowed to be disposed overboard.	Marine Dredging/ During construction	Contractor(s)		✓		N/A	-
S6.9	Silt removal facilities such as silt traps or sedimentation facilities will be provided to remove silt particles from runoff to meet the requirements of the TM standard under the WPCO. The design of silt removal facilities will be based on the guidelines provided in ProPECC PN 1/94. All drainage facilities and erosion and sediment control structures will be inspected on a regular basis and maintained to confirm proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit will be removed regularly.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented, reminder issued	ProPECC PN 1/94 TM Standard under the WPCO

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S6.9	Earthworks to form the final surfaces will be followed up with surface protection and drainage works to prevent erosion caused by rainstorms.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9	Appropriate surface drainage will be designed and provided where necessary.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9	The precautions to be taken at any time of year when rainstorms are likely together with the actions to be taken when a rainstorm is imminent or forecasted and actions to be taken during or after rainstorms are summarised in Appendix A2 of ProPECC PN 1/94.	Land site & drainage/ During construction	Contractor(s)	✓	✓		Implemented	ProPECC PN 1/94
S6.9	Oil interceptors will be provided in the drainage system where necessary and regularly emptied to prevent the release of oil and grease into the storm water drainage system after accidental spillages.	Land site & drainage/ During construction	Contractor(s)		✓		N/A	-
S6.9	Temporary and permanent drainage pipes and culverts provided to facilitate runoff discharge, if any, will be adequately designed for the controlled release of storm flows.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9	The temporary diverted drainage, if any, will be reinstated to the original condition when the construction work has finished or when the temporary diversion is no longer required.	Land site & drainage/ During construction	Contractor(s)		✓		N/A	-
S6.9	Appropriate numbers of portable toilets shall be provided by a licensed contractor to serve the construction workers over the construction site to prevent direct disposal of sewage into the water environment.	Land site & drainage/ During construction	Contractor(s)		✓		Implemented	-
S6.9 and S6.12	The sterilization water should be dechlorinated with total residual chlorine (TRC) level below 1 mg/L before discharge to public sewer. In situ testing of TRC should also be conducted for the discharge of chlorinated water for pipeline disinfection to ensure sufficient dechlorination before discharge to public sewer.	Sterilization of water mains prior to commissioning	Contractor(s)		✓	✓	N/A	Technical Memorandum for Effluents Discharged into Drainage and Sewerage Systems Inland and Coastal Waters

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation status	Relevant Legislation & Guidelines
				D	C	O		
S6.9	The cleaning and flushing water should also be treated and desilted to the relevant discharge requirement stipulated in TM-DSS before discharging.	Sterilization of water mains prior to commissioning	Contractor(s)		✓	✓	N/A	Technical Memorandum for Effluents Discharged into Drainage and Sewerage Systems Inland and Coastal Waters
S6.9	Site drainage should be well maintained and good construction practices should be observed to ensure that oil, fuels, solvents and other chemicals are managed, stored and handled properly and do not enter the nearby water streams.	Land site & drainage/ During construction/ During operation	Contractor(s)		✓	✓	Implemented, reminder issued	-
S6.12	Regular site inspections will be carried out in order to confirm that regulatory requirements are being met and that contractors are implementing the standard site practice and mitigation measures as proposed to reduce potential impacts to water quality.	During construction	Contractor(s)/ ET & IEC		✓		Implemented, reminder issued	-

Note: D – Design stage C – Construction O – Operation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
Waste Management								
S8.5	Nomination of approved personnel to be responsible for standard site practices, arrangements for collection and effective disposal to an appropriate facility of all wastes generated at the site.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Training of site personnel in proper waste management and chemical handling procedures. Training will be provided to workers on the concepts of site cleanliness and appropriate waste management procedures, including waste reduction, reuse and recycling at the beginning of the construction works.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Provision of sufficient waste disposal points and regular collection for disposal.	All area/ During construction/ During operation	Contractor(s)		✓	✓	Implemented, reminder issued	DEVB TC(W) No. 8/2010, Enhanced Specification for Site Cleanliness and Tidiness.
S8.5	Appropriate measures to reduce windblown litter and dust transportation of waste by either covering trucks or by transporting wastes in enclosed containers.	All area/ During construction	Contractor(s)		✓		Implemented	DEVB TC(W) No. 8/2010, Enhanced Specification for Site Cleanliness and Tidiness.
S8.5	A waste management plan (WMP) as stated in the "ETWB TC(W) No. 19/2005, Environmental Management on Construction Sites" for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established and implemented during the construction phase as part of the Environmental Management Plan (EMP). The Contractor will be required to prepare the EMP and submits it to the Architect/ Engineer under the Contract for approval prior to implementation.	All area/ During construction	Contractor(s)		✓		Implemented	ETWB TC(W) No. 19/2005, Environmental Management on Construction Sites
S8.5	Separation of chemical wastes for special handling and appropriate treatment at the Chemical Waste Treatment Centre at Tsing Yi.	All area/ During construction	Contractor(s)		✓		Implemented	Chapters 2 & 3 Code of Practice on the Packaging, Labelling & Storage of Chemical Wastes published under the Waste Disposal Ordinance (Cap 354), Section 35

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors.	Land site/ During construction	Contractor(s)		✓		Implemented	Waste Disposal Ordinance (Cap 354)
S8.5	A recording system for the amount of wastes generated/ recycled and disposal sites. The trip- ticket system will be included as one of the contractual requirements and implemented by the contractor(s).	Land site/ During construction	Contractor(s)		✓		Implemented	DEVB TC(W) No. 6/2010, Trip Ticket System for Disposal of Construction & Demolition Materials
S8.5	Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of material and their proper disposal.	Land site/ During construction/ During operation	Contractor(s)		✓		Implemented	WBTC 32/92, The Use of Tropical Hard Wood on Construction Site
S8.5	Encourage collection of aluminium cans and waste paper by individual collectors during construction with separate labelled bins provided to segregate these wastes from other general refuse by the workforce.	Land site/ During construction	Contractor(s)		✓		Implemented	ETWB TCW No. 33/2002, Management of Construction and Demolition Material Including Rock
S8.5	Any unused chemicals and those with remaining functional capacity will be recycled as far as possible.	Land site/ During construction	Contractor(s)		✓		N/A	-
S8.5	Use of reusable non-timber formwork to reduce the amount of C&D materials.	All areas/ During construction	Contractor(s)		✓		Implemented	WBTC 32/92, The Use of Tropical Hard Wood on Construction Site
S8.5	Prior to disposal of construction waste, wood, steel and other metals will be separated to the extent practical, for re-use and/or recycling to reduce the quantity of waste to be disposed of to landfill.	All areas/ During construction	Contractor(s)		✓		Implemented	DEVB TC(W) No. 6/2010, Trip Ticket System for Disposal of Construction & Demolition Materials
S8.5	Proper storage and site practices to reduce the potential for damage or contamination of construction materials.	All areas/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Plan and stock construction materials carefully to reduce amount of waste generated and avoid unnecessary generation of waste.	All areas/ During construction	Contractor(s)		✓		Implemented	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	A Sediment Quality Report (SQR) for sampling and chemical testing of the sediment will be prepared and submitted to the EPD for approval. The approved detailed sampling and chemical testing will be carried out prior to the commencement of the dredging activities to confirm the sediment disposal method.	Marine works/ During construction	Contractor(s)		✓		N/A	ETWB TC(W) No. 34/2002 and Dumping at Sea Ordinance (DASO)
S8.5	The management of dredged/ excavated sediment management requirement from ETWB TC(W) No. 34/2002 will be incorporated in the Specification of the Contract Documents.	Marine works/ During construction	WSD/ Contractor(s)		✓		Implemented	ETWB TC(W) No. 34/2002 and Dumping at Sea Ordinance (DASO)
S8.5	The contractor will open a billing account with EPD in accordance with the Waste Disposal (Charges for Disposal of Construction Waste) Regulation for the payment of disposal charges.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	Cap 354N Waste Disposal (Charges for Disposal of Construction Waste) Regulation
S8.5	A trip-ticket system will be established in accordance with DEVB TC(W) No. 6/2010 to monitor the reuse of surplus excavated materials off-site and disposal of construction waste and general refuse at transfer facilities/ landfills, and to control fly-tipping.	Contract mobilization/ During construction	Contractor(s)		✓		Implemented	DEVB TC(W) No. 6/2010, Trip Ticket System for Disposal of Construction & Demolition Materials
S8.5	The project proponent will also conduct regular inspection of the waste management measures implemented on site as described in the Waste Management Plan.	All area/ During construction	Contractor(s)/ Environmental Team (ET) & Independent Environmental Checker (IEC)		✓		Implemented	ETWB TC(W) No. 19/2005, Environmental Management on Construction Sites
S8.5	A recording system (similar to summary table as shown in Annex 5 and Annex 6 of Appendix G of ETWB TC(W) No. 19/2005) for the amount of waste generated, recycled and disposed of (including the disposal sites) will be established during the construction phase.	All area/ During construction	Contractor(s)		✓		Implemented	Annex 5 and Annex 6 of Appendix G of ETWB TC(W) No. 19/2005
S8.5	Inert C&D materials (public fill) will be reused within the Project as far as practicable.	All area/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Public fill and construction waste shall be segregated and stored in different containers or skips to facilitate reuse or recycling of materials and their proper disposal.	All area/ During construction	Contractor(s)		✓		Implemented	-
S8.5	Specific areas of the work site will be designated for such segregation and storage if immediate use is not practicable.	All area/ During construction	Contractor(s)		✓		Implemented	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	To reduce the potential dust and water quality impacts of site formation works, C&D materials will be wetted as quickly as possible to the extent practice after filling.	All area/ During construction	Contractor(s)		✓		Implemented	Air Pollution Control (Construction Dust) Regulation (Cap 311R); WPCO (Cap 358)
S8.5	Open stockpiles of excavated/ fill materials or construction wastes on-site should be covered with tarpaulin or similar fabric.	Land site/ During Construction, particularly dry season	Contractor(s)		✓		Implemented	Air Pollution Control (Construction Dust) Regulation (Cap 311R)
S8.5	Chemical waste container shall be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	Waste Disposal (Chemical Waste) (General) Regulation; Code of Practice on the Packaging, Handling and Storage of Chemical Wastes
S8.5	Chemical waste container shall have a capacity of less than 450 L unless the specifications have been approved by the EPD.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	A label in English and Chinese shall be displayed on the chemical container in accordance with instructions prescribed in Schedule 2 of the Regulations.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall be enclosed on at least 3 sides.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall have adequate ventilation.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall be covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary).	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	Storage areas for chemical waste shall be arranged so that incompatible materials are appropriately separated.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	
S8.5	General refuse will be stored in enclosed bins or compaction units separately from construction and chemical wastes.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented, reminder issued.	

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
S8.5	Adequate number of waste containers will be provided to avoid over-spillage of waste.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	DEVB TC(W) No. 8/2010 Enhanced Specification for Site Cleanliness and Tidiness.
S8.5	A reputable waste collector will be employed by the Contractor to remove general refuse from the site, separately from construction and chemical wastes, on a daily basis to minimise odour, pest and litter impacts.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	-
S8.5	Recycling bins will be provided at strategic locations within the Site to facilitate recovery of recyclable materials (including aluminum can, waste paper, glass bottles and plastic bottles) from the Site. Materials recovered will be sold for recycling.	All area/ During construction/ During operation	Contractor(s)/ WSD		✓	✓	Implemented	-
S8.5	To avoid any odour and litter impact, accurate number of portable toilets will be provided for workers on-site.	All area/ During construction	Contractor(s)		✓		Implemented	-
S8.5	The burning of refuse on construction sites is prohibited by law.	All area/ During construction	Contractor(s)		✓		Implemented	Air Pollution Control Ordinance (Cap 311)
S8.7	To facilitate monitoring and control over the contractors' performance on waste management, a waste inspection and audit programme will be implemented throughout the construction phase.	All facilities/ During construction	ET/ IEC		✓		Implemented	-

Note: D – Design stage C – Construction O – Operation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
Ecology								
S9.7	For slope mitigation works within the Clear Water Bay Country Park, to avoid tree felling and damages to trees, the exact locations of the flexible barrier foundation plates, soil nails and rock dowels can be adjusted during detailed design, and a setback distance from existing trees is recommended to be maintained as far as practical. A detailed specification describing the exact locations of the flexible barrier foundation plates, soil nails and rock dowels will be prepared to illustrate how the setback distance from existing trees would be implemented for tree avoidance.	Slope mitigation works area/ During detailed design/ During construction	Contractor(s)	✓	✓		N/A	-
S9.7	Pruning of tree canopies along the alignment of the flexible barriers shall be limited to a minimum.	Slope mitigation works area/ During construction	Contractor(s)		✓		N/A	-
S9.7	The alignment of flexible barriers shall be optimized to preserve all species of conservation interest and minimize the impact to the existing vegetation as far as practicable. All individuals of <i>Marsdenia lachnostoma</i> within the slope mitigation areas shall be retained <i>in-situ</i> , by positioning the alignment of flexible barrier at a minimum 1.5m in a radius away from these individuals.	Slope mitigation works area/ During detailed design/ During construction	Contractor(s)	✓	✓		N/A	-
S9.7 and 9.10	At the detailed design stage prior to the commencement of the slope mitigation works, a vegetation survey shall be carried out at the slope mitigation areas within the Clear Water Bay Country Park to assess the condition and identify the location of each individual of <i>Marsdenia lachnostoma</i> and other flora species of conservation interest that may be directly affected by the construction works.	Slope mitigation works area/ During detailed design/ During construction	Contractor(s)	✓			Implemented	-
S9.7	Temporary fencing will be installed to fence off the concerned species either in groups of individually within the works area and in the close proximity to prevent from being damaged and disturbed during construction. A sign identifying the site shall be attached to the fence and flagging tape shall be attached to the individuals to visualize their locations.	Slope mitigation works area/ During construction	Contractor(s)		✓		N/A	-
S9.7 and S9.10	A specification for fencing and demarcating individuals of <i>Marsdenai lachnostoma</i> (or other flora species of conservation interest, if found) adjacent to the proposed alignment of the flexible barriers will be prepared to protect the species.	Slope mitigation works area/ During construction	Contractor(s)		✓		N/A	-
S9.7	Induction training shall also be provided to all site personnel in order to brief them on this flora of conservation interest including the locations and their importance.	Slope mitigation works area/ During construction	Contractor(s)		✓		N/A	-

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
S9.7	The resident site supervisory staff will closely monitor the conditions of concerned individuals during construction of flexible barriers in the close proximity.	Slope mitigation works area/ During construction	Contractor(s)		✓		N/A	-
S9.7	Erect fences along the boundary of the works area before the commencement of works to prevent vehicle movements and encroachment of personnel onto adjacent areas.	All area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	Regularly check the work site boundaries to ensure that they are not breached and that damage does not occur to surrounding areas.	All area/ During construction	Contractor(s)/ ET		✓		Implemented.	-
S9.7	Avoid any damage and disturbance, particularly those caused by filling and illegal dumping, to the surrounding habitats through proper management of waste disposal.	All area/ During construction	Contractor(s)		✓		Implemented	-
S9.7	Reinstate temporarily affected areas, particularly the habitats of plantation and shrubland-grassland immediately after completion of construction works, through on-site tree/shrub planting. The tree/shrub species will be chosen with reference to those in the surrounding area.	All area/ During construction	Contractor(s)		✓		N/A	-
S9.7	Affected habitats within the Clear Water Bay Country Bay shall be reinstated by hydro-seeding and planting of climbers and native shrub seedlings where practical upon completion of the slope mitigation works.	All area/ During construction	Contractor(s)		✓		N/A	-

Note: D – Design stage C – Construction O – Operation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
Landscape & Visual								
S11.10 & 11.11	The construction area and area allowed for temporary structures, such as the contractor's office, will be minimized to a practical minimum. (MM1)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-
S11.10 & 11.11	At the detailed design stage, the design team will seek to minimize the landscape footprint of the Project and above ground facilities, while satisfying all other requirements. (MM2)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-
S11.10 & 11.11	Design principles will be adopted to take into account the surrounding area, particularly Clear Water Bay Country Park behind and the nearby waterfront, with due consideration given to: - green roofs where practical (i.e. without equipment on the roof); - roadside planting; - aesthetic treatment of all structures; - vertical greening; - screen planting along application site; and - landscape enhancement with amenity planting where practical including planting along the edge (site boundary) fence with native shrubs where feasible, to reduce their visual impact and blend them into the surrounding landscape. (MM3)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-
S11.10 & 11.11	All trees within the Project Site or the potential slope mitigation works area will be carefully protected during construction according to DEVB TCW No. 10/2013 – Tree Preservation (MM4)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented, reminder issued	ETWB TCW No. 3/2006 - Tree Preservation.
S11.10 & 11.11	No tree within the Country Park will be felled. Trees within the Site unavoidably affected by the works will be transplanted where necessary and practical. For trees that need to be felled, compensatory planting will be provided to the satisfaction of relevant Government departments. A compensatory tree planting proposal including locations of tree compensation will be submitted to seek relevant government department's approval, in accordance with DEVB TC(W) No. 10/2013. (MM5)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	DEVB TC(W) No. 10/2013
S11.10 & 11.11	Any slope mitigation works necessary to address natural terrain hazards, will be minimized to minimize any potential environmental impact to the Country Park e.g. soil nailing and rock stabilization will aim to avoid existing trees e.g. should any restoration of vegetation be necessary, the best planting matrix with native species will be established, with the aim of resembling the existing vegetation. (MM6)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	N/A	

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
S11.10 & 11.11	Dredging works for the installation of intake structures and outfall diffusers should be minimized to avoid or reduce any potential environmental impacts to as low as reasonably practicable (ALARP). The intake and outfall structures (e.g. intake openings and diffuser heads) will be prefabricated and transferred to site for installation. (MM7)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	
S11.10 & 11.11	All night-time lighting will be reduced to a practical minimum both in terms of number of level and will be hooded and directional. (MM8) units and lux level and will be hooded and directional. (MM8)	All area/ Detailed design/ During construction/ During operation	WSD/ Contractor(s)	✓	✓	✓	Implemented	-

Note: D – Design stage C – Construction O – Operation

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
Landfill Gas Hazard								
S12.7	During all works, safety procedures should be implemented to minimise the risks of fires and explosions, asphyxiation of workers and toxicity effects resulting from contact with contaminated soil and groundwater.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	-
S12.7	During trenching and excavation as well as creation of confined spaces at near to or below ground level, precautions should be clearly laid down and rigidly Gas detection equipment and appropriate breathing apparatus should be available and used when entering confined spaces or trenches deeper than 1 metre.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	The Contractor should make the workers are aware of potential hazards of working in confined spaces (any chamber, manhole or culvert which is large enough to permit access to personnel). Such work in confined spaces is controlled by the Factories and Industrial Undertakings (Confined Spaces) Regulations of the Factories and Industrial Undertakings Ordinance. Following the Safety Guide to Working in Confined Spaces ensures compliance with the above regulations.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	Safety officers, specifically trained with regard to landfill gas and leachate related hazards and the appropriate actions to take in adverse circumstances, should be present on the site throughout the works, in particular, when works are undertaken below grade.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	All personnel who work on site and all visitors to the site should be made aware of the possibility of ignition of gas in the vicinity of the works, the possible presence of contaminated water and the need to avoid physical contact with it.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	Monitoring for landfill gas should be undertaken in all excavations, manholes, chambers (particularly during pipe jacking) and any confined spaces through the use of an intrinsically safe portable instrument, appropriately calibrated and capable of measuring the concentrations of methane. carbon dioxide and oxygen.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	Monitoring frequency and areas to be monitored should be specified prior to commencement of groundwork, either by the Safety Officer, or by an appropriately qualified person. All measurements should be recorded and documented.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
S12.7	Proceed drilling with adequate care and precautions against the potential hazards which may be encountered.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	Prior to the commencement of the site works, the drilling contractor should devise a 'method-of- working' statement covering all normal and emergency procedures (including but not limited to number of operatives, experience and special skills of operatives, normal method of operations, emergency procedures, supervisors responsibilities, storage and use of safety equipment, safety procedures and signs, barriers and guarding). The site supervisor and all operatives must be familiar with this statement.	All area/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	Where below ground service entries are necessary to the Incoming Switchgear Room, 132 kV Substation and Chlorine Store (I) and (II), the entry point should be sealed to prevent gas entry. In addition, any below grade cable trenches entering the Incoming Switchgear Room and 132 kV Substation can become the pathway for landfill gas and hence grilled metal covers should be used.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	N/A	
S12.7	It is recommended regular landfill gas monitoring should be carried out at the Incoming Switchgear Room, 132 kV Substation and Chlorine Store (I) and (II). The monitoring frequency will be monthly for the first year of operation. If the monitoring results show no sign of landfill gas migration, reduce the monitoring frequency to once every six months.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	N/A	
S12.7	The manholes and utility pits within the Project Site and along the fresh water mains. Each manhole/ utility pit should be monitored with two measurements (at mid depth and base). Each measurement should be monitored for a minimum of 10 minutes. A steady reading and peak reading should be recorded at each manhole/ utility pit and for each measurement. The need for venting the manhole/ utility pit and further monitoring will be reviewed after the initial monitoring.	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	
S12.7	All construction, operation and maintenance personnel working on-site as well as visitors should be made aware of the hazards of landfill gas and its possible presence on-site. This should be achieved through a combination of posting warning signs in prominent places and also by access to detailed information on landfill gas hazards and the designs and procedural means by	All area/ Detailed design/ During construction/ During operation	Contractor(s)	✓	✓	✓	Implemented	

EIA Reference	Recommended Environmental Protection Measures/ Mitigation Measures	Objectives of the recommended measures & main concerns to address	Implementation Agent	Implementation Stage			Implementation Status	Relevant Legislation & Guidelines
				D	C	O		
	which these hazards are being minimized on-site.							

Note: D – Design stage C – Construction O – Operation

Appendix D

Impact Monitoring Schedule of the Reporting Month

Contract No. 13/WSD/17
Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Water Quality Monitoring Schedule

Jun-22						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
			1	2	3	4
				Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 10:00-13:00 Flood Tide: 03:00-10:00 <u>Monitoring Time:</u> Mid-ebb: 12:15-15:45 Mid-flood: 08:00-09:39		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 10:00-19:18 Flood Tide: 04:00-10:00 <u>Monitoring Time:</u> Mid-ebb: 12:54-16:24 Mid-flood: 08:00-09:42
5	6	7	8	9	10	11
		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 13:08-21:42 Flood Tide: 00:00-13:08 <u>Monitoring Time:</u> Mid-ebb: 15:30-19:00 Mid-flood: 09:00-12:30		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 05:55-10:21 Flood Tide: 10:21-16:34 <u>Monitoring Time:</u> Mid-ebb: 08:00-10:00 Mid-flood: 11:42-15:12 (cancelled)		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 06:39-13:00 Flood Tide: 13:00-19:26 <u>Monitoring Time:</u> Mid-ebb: 08:00-11:30 Mid-flood: 14:30-18:00
12	13	14	15	16	17	18
	Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 07:38-14:37 Flood Tide: 14:37-21:24 <u>Monitoring Time:</u> Mid-ebb: 09:22-12:52 Mid-flood: 15:00-19:00		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 09:00-16:23 Flood Tide: 16:23-23:28 <u>Monitoring Time:</u> Mid-ebb: 10:58-14:28 Mid-flood: 16:44-19:00		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 11:00-18:12 Flood Tide: 04:00-11:00 <u>Monitoring Time:</u> Mid-ebb: 12:48-16:18 Mid-flood: 08:00-10:30	
19	20	21	22	23	24	25
	Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 14:00-21:00 Flood Tide: 07:00-14:00 <u>Monitoring Time:</u> Mid-ebb: 15:32-19:00 Mid-flood: 08:22-11:52		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 16:10-22:00 Flood Tide: 09:27-16:10 <u>Monitoring Time:</u> Mid-ebb: 16:27-19:00 Mid-flood: 11:00-14:30		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 06:00-12:26 Flood Tide: 12:26-19:00 <u>Monitoring Time:</u> Mid-ebb: 08:00-11:00 Mid-flood: 14:00-17:00	
26	27	28	29	30		
		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 08:00-15:43 Flood Tide: 15:43-22:38 <u>Monitoring Time:</u> Mid-ebb: 10:00-13:30 Mid-flood: 16:00-19:00		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 <u>Tidal Period:</u> Ebb Tide: 09:19-16:39 Flood Tide: 02:00-09:19 <u>Monitoring Time:</u> Mid-ebb: 11:30-15:00 Mid-flood: 08:00-9:15		
<p>Remarks:</p> <p>1. Monitoring Parameters: Dissolved oxygen, Temperature, pH, Turbidity, Salinity, Suspended Solids</p> <p>2. Due to the adverse sea and weather condition, the Mid-flood tide water sampling was cancelled on 9 June 2022.</p> <p>Note:</p> <p>- Due to safety concern of vessel transportation earlier than 0700, Water Quality Monitoring would start at 0800.</p> <p>- Prioritized routing: Mid-Ebb: CE→WSR16→WSR37→WSR36→WSR33→Remaining stations and Mid-Flood: CF→WSR1→WSR2→WSR3→WSR4→Remaining stations</p>						

Appendix E

Event / Action Plan for Noise Exceedance

Table E1 Event and Action Plan for Construction Noise Monitoring

Event	Action			
	ET	IEC	ER	Contractor
Action Level	<ol style="list-style-type: none"> 1. Carry out investigation to identify the source and cause of the complaint/ exceedance(s) 2. Notify IEC, ER, and Contractor and report the results of investigation to the Contractor; ER and the IEC 3. Discuss with the Contractor and IEC for remedial measures required 4. If the complaint is related to the Project, conduct additional monitoring for checking mitigation effectiveness and report the findings and results to the IEC, ER and the Contractor 	<ol style="list-style-type: none"> 1. Review the analyzed results submitted by the ET 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly 3. Supervise the implementation of remedial measures 	<ol style="list-style-type: none"> 1. Confirm receipt of Notification of Exceedance in writing 2. Require Contractor to propose remedial measures for the analysed noise problem 3. Ensure remedial measures are properly implemented 	<ol style="list-style-type: none"> 1. Submit noise mitigation proposals, if required, to the IEC and ER 2. Implement noise mitigation proposals.
Limit Level	<ol style="list-style-type: none"> 1. Carry out investigation to identify the source and cause of the exceedance 2. Notify IEC, ER, Project Proponent, EPD and Contractor 3. Repeat measurements to confirm findings 4. Provide investigation report to IEC, ER, EPD and Contractor he causes of the exceedances 5. If the exceedance is related to the Project, assess effectiveness by additional monitoring. 6. Report the remedial action implemented and the additional monitoring results to IEC, EPD, ER and Contractor 7. If exceedance stops, cease additional monitoring 	<ol style="list-style-type: none"> 1. Review the analyzed results submitted by the ET 2. Discuss the potential remedial measures with ER, ET Leader and Contractor 3. Review Contractors remedial actions whenever necessary to assure their effectiveness and advise the ER accordingly 4. Supervise the implementation of remedial measures 	<ol style="list-style-type: none"> 1. Confirm receipt of Notification of Exceedance in writing 2. Require the Contractor to propose remedial measures for the analysed noise problem 3. Ensure remedial measures are properly implemented 4. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor, in agreement with the Project Proponent, to stop that activity of work until the exceedance is abated 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance 2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification 3. Implement the agreed proposals 4. Resubmit proposals if problem still not under control 5. Stop the relevant activity of works as determined by the Project Proponent until the exceedance is abated

Notes : ET = Environmental Team, IEC = Independent Environmental Checker; ER = Engineering Representatives

Appendix F

Noise Monitoring Equipment Calibration Certificate (Blank)

(Blank)

Appendix G

Event / Action Plan for Water Quality Exceedance

Table G1 Event and Action Plan for Water Quality Monitoring

Event	Action		IEC	Contractor(s)	ER
	ET				
Action Level being exceeded by one sampling day	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER.		1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice	1. Confirm receipt of notification of exceedance in writing.
Action Level being exceeded by two or more consecutive sampling days	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER; 5. Discuss with IEC and Contractor(s) on additional mitigation measures and ensure that they are implemented		1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD; 3. Discuss with ET and Contractor(s) on additional mitigation measures and advise ER accordingly; 4. Assess the effectiveness of the implemented mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice; 3. Consider changes of working methods; 4. Discuss with ET and IEC on additional mitigation measures and propose them to ER within 3 working days; 5. Implement the agreed mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Discuss with the IEC on the proposed additional mitigation measures and agree on the mitigation measures to be implemented. 3. Ensure additional mitigation measures are properly implemented.
Limit Level being exceeded by one sampling day	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER; 5. Discuss with IEC and Contractor(s) on additional mitigation measures and ensure that they are implemented		1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD; 3. Discuss with ET and Contractor(s) on additional mitigation measures and advise ER accordingly; 4. Assess the effectiveness of the implemented mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice; 3. Critically review the need to change working methods; 4. Discuss with ET and IEC on additional mitigation measures and propose them to ER within 3 working days; 5. Implement the agreed mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Discuss with the IEC on the proposed additional mitigation measures and agree on the mitigation measures to be implemented. 3. Ensure additional mitigation measures are properly implemented. 4. Request Contractor(s) to critically review the working methods.
Limit Level being exceeded by two or more consecutive sampling days	1. Repeat <i>in situ</i> measurement on the next day of exceedance to confirm findings; 2. Check monitoring data, plant, equipment and Contractor(s)'s working methods; 3. Identify source(s) of impact and record in notification of exceedance; 4. Inform IEC, Contractor(s) and ER; 5. Discuss with IEC and Contractor(s) on additional mitigation measures and ensure that they are implemented		1. Check monitoring data submitted by ET and Contractor(s)'s working methods; 2. Inform EPD; 3. Discuss with ET and Contractor(s) on additional mitigation measures and advise ER accordingly; 4. Assess the effectiveness of the implemented mitigation measures.	1. Confirm receipt of notification of exceedance in writing; 2. Check plant and equipment and rectify unacceptable practice; 3. Critically review the need to change working methods; 4. Discuss with ET and IEC on additional mitigation measures and propose them to ER within 3 working days; 5. Implement the agreed mitigation measures. 6. As directed by ER, slow down or stop all or part of the marine construction works/ production volume of the desalination plant until no exceedance of Limit Level.	1. Confirm receipt of notification of exceedance in writing; 2. Discuss with the IEC on the proposed additional mitigation measures and agree on the mitigation measures to be implemented. 3. Ensure additional mitigation measures are properly implemented. 4. Request Contractor(s) to critically review the working methods; 5. Consider and instruct, if necessary, the Contractor(s) to slow down or to stop all or part of the marine construction works/ production volume of the desalination plant until no exceedance of Limit Level.

Notes : ET = Environmental Team, IEC = Independent Environmental Checker; ER = Engineering Representatives
 The above actions should be taken within 1 working day after the exceedance is identified during operation phase.

Appendix H

Waste Flow Table

Contract No. 13/WSD/17

Environmental Management Plan for Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Appendix F - Monthly Summary Waste Flow Table

Name of Department: WSD

Contract No.: 13/WSD/17

Monthly Summary Waste Flow Table for 2022 (year)

Month	Actual Quantities of Inert C&D Materials Generated Monthly						Actual Quantities of C&D Wastes Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Others, e.g. general refuse
	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000 kg)	(in '000kg)	(in '000kg)	(in '000kg)	(in '000kg)
Jan	233.850	0.000	0.000	0.000	233.850	0.000	0.000	0.069	0.005	0.000	109.020
Feb	175.850	0.000	0.000	0.000	175.850	0.000	0.000	0.000	0.000	0.296	94.830
Mar	68.790	0.000	0.000	0.000	68.790	0.000	0.000	0.000	0.000	0.000	54.140
Apr	29.050	0.000	0.000	0.000	29.050	0.000	0.001	0.165	0.004	0.000	113.780
May	6.300	0.000	0.000	0.000	6.300	0.000	0.000	0.000	0.000	0.000	139.130
Jun	80.960	0.000	0.000	0.000	80.960	0.000	0.000	0.124	0.004	0.000	271.000
Sub-total	594.800	0.000	0.000	0.000	594.800	0.000	0.001	0.357	0.013	0.296	781.900
Jul											
Aug											
Sep											
Oct											
Nov											
Dec											
Total	594.800	0.000	0.000	0.000	594.800	0.000	0.001	0.357	0.013	0.296	781.900

Notes:

- (1) The performance targets are given in Section 1.69 of Specification B
- (2) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- (3) Plastics refer to plastic bottles/containers, plastic sheets/ foam from packaging material

* The data will be reviewed in next month.

Appendix I

Site Inspection Proforma



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

WEEKLY ENVIRONMENTAL INSPECTION CHECKLIST

Inspection Date: 7/16/2022 Inspected by: ET: Jacky Leung SO: Layman Kok WSD: _____
 Contractor: Triway Tsang IEC: Tseung Kwan

Inspection Time: 14:30

Weather							
Condition	<input type="checkbox"/> Sunny	<input checked="" type="checkbox"/> Fine	<input type="checkbox"/> Overcast	<input type="checkbox"/> Drizzle	<input type="checkbox"/> Rain	<input type="checkbox"/> Storm	<input type="checkbox"/> Hazy
Temperature	<input type="checkbox"/> 27 C		Humidity	<input type="checkbox"/> High	<input type="checkbox"/> Moderate	<input type="checkbox"/> Low	
Wind	<input type="checkbox"/> Calm	<input type="checkbox"/> Light	<input checked="" type="checkbox"/> Breeze	<input type="checkbox"/> Strong			

Item No.	EIA ref.	Description	N/A	Yes	No	Photo/Remarks
0.00		General				
0.01		Is the current Environmental Permit displayed conspicuously at all vehicle site entrances/exits for public's information at any time?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
0.02		Is ET Leader's log-book kept readily available for inspections?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.00		Construction Dust				
1.01	S4.8.1	Are dusty materials, such as excavated materials, building debris and construction materials, and exposed earth surface properly covered to prevent dust emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>Reminder!</u>
1.02	S4.8.1	Are screenings, enclosures, water spraying or vacuum cleaning devices provided to dusty construction works for dust suppression?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03	S4.8.1	Are fumes or smoke emitting plants or construction activities shielded by a screen?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04	S4.8.1	Are wheel-washing facilities with high-pressure water jets provided at all site exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.05	S4.8.1	Is wheel-washing provided to all vehicles leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.06	S4.8.1	Are road section near the site exit free from dusty material?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.07	S4.8.1	Are all main haul roads inside the site paved or sprayed with water to minimize dust emission during vehicle movement?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.08	S4.8.1	Are water spraying provided immediately prior to any loading or transfer of dusty materials?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	S4.8.1	Are covers provided to all dump trucks carrying dusty materials when entering and leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.10	S4.8.1	Are the working areas for uprooting of trees, shrubs, or vegetation or the removal of boulders, poles, pillars sprayed with water to maintain the entire surface wet?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	S4.8.1	Is exposed earth properly treated within six months after the last construction activity on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12	S4.8.1	Does the operation of plants on site free form dark smoke emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
1.13	S4.8.1	Are vehicles travelling at speed not exceeding 15km/hr within the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.14	S4.8.1	Are stock of more than 20 bags of cement or day PFA covered or sheltered on top and 3 sides?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	S4.8.1	Are de-bagging, batching and mixing processes of bagged cement carried out in sheltered areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16	S4.8.1	Are hoarding of at least 2.4m high provided along the site boundary adjoining areas accessible by the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17	S4.8.1	Is open burning prohibited?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.00		Construction Noise (Airborne)				
2.01	S5.7	Are quiet plants adopted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.02	S5.7	Are the PME's operating on site well-maintained to minimize the generation of excessive noise?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.03	S5.7	Are plants throttled down or turned off when not in use?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.04	S5.7	Are the plants known to emit noise strongly in one direction oriented to face away from NSRs?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.05	S5.7	Are moveable barriers provided to screen NSRs from plant or noisy operations?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	S5.7	Are silencers, mufflers and enclosures provided to plants?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.07	S5.7	Are the hoods, cover panels and inspection hatches of PME's closed during operation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.08	S5.7	Are purposely-built site hoarding construction with appropriate materials provided along the site boundary?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.09	S5.7	Are noisy operation properly scheduled to minimize exposure and cumulative impacts to nearby sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.10	S5.7	Are valid noise emission label(s) affixed to all hand-held breakers operating on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.11	S5.7	Are valid noise emission label(s) affixed to all air compressors operating on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	S5.7	Are all construction noise permit(s) applied for percussive piling work?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	S5.7	Are construction noise permit(s) applied for general construction works during restricted hours?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.14	S5.7	Are valid construction noise permit(s) displayed at all vehicular exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.00		Water Quality				
3.01	S6.9	Is effluent discharge license obtained for wastewater discharge from site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.02	S6.9	Is effluent discharged according to the effluent discharge license?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.03	S6.9	Is wastewater discharge from site properly treated prior to discharge?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder 1



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.04	S6.9	Are perimeter channels provided to intercept storm runoff from outside the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	S6.9	Are sand/silt removal facilities such as sand/silt traps and sediment basins provided to remove sand/silt particles from runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.06	S6.9	Is surface runoff diverted to sedimentation facilities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.07	S6.9	Is the drainage system properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.08	S6.9	Are construction works carefully programmed to minimize soil excavation works during rainy seasons?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.09	S6.9	Are exposed soil surface protected by paving as soon as possible to reduce the potential of soil erosion?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	S6.9	Are temporary access roads protected by crushed gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.11	S6.9	Are exposed slope surface properly protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	S6.9	Is trench excavation avoided in the wet season as far as practicable, or if necessary, backfilled in short sections after excavation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	S6.9	Are open stockpiles of construction materials on site covered by tarpaulin or similar fabric during construction?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	S6.9	Is runoff from wheel-washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.15	S6.9	Is oil leakage or spillage prevented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.16	S6.9	Are there any measures to prevent the release of oil and grease into the storm drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.17	S6.9	Are the oil interceptors/ grease traps properly maintained?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.18	S6.9	Are debris and rubbish generated on site collected, handled and disposed of properly to avoid them entering the streams?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.19	S6.9	Are all fuel tanks and storage areas provided with locks and be sited on sealed areas, within bunds of capacity equal to 110% of the storage capacity of the largest tank?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.20	S6.9	Are tanks, containers, storage area bunded and the locations locked as far as possible from the sensitive watercourse and stormwater drains?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.21	S6.9	Are sufficient chemical toilets provided on site to handle sewage from construction work force?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.22	S6.9	Are sewage disposal and toilet maintenance of the portable chemical toilets provided by the licensed contractors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.23	S6.9	Is concrete washing water properly collected and treated prior to discharge?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.24	S6.9	Is suitable type of silt curtains deployed during dredging to reduce the elevation of suspended solids to nearby sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.25	S6.9	Is closed grab dredger used to reduce the potential leakage of sediments?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.26	S6.9	Is closed grab dredger of 3 to 6 m ³ used for dredging at seawater intake?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.27	S6.9	Is specific work staff assigned the responsibility for monitoring the number of grab dredged per hour? Is number of cycle limited to 20-21 grab per hour for 3m ³ closed grab, 10-11 grab per hour for 6m ³ closed grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.28	S6.9	Is the grab operated in slow and controlled manner such that the impact to seabed by the grab when being lowered could be minimized? Is the operator ensured the grab be properly closed before lifting the grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.29	S6.9	Is the maximum allowed dredging rate at the seawater intake limited to 750 m ³ /day while the maximum allowed dredging rate at the submarine outfall is 3,500 m ³ /day?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.30	S6.9	Is dredged marine sediment disposed of in a gazetted marine disposal area in accordance with marine dumping permit conditions of the Dumping at Sea Ordinance (DASO)?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.31	S6.9	Are disposal vessels fitted with tight bottom seals in order to prevent leakage of material during transport?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.32	S6.9	Are barges filled to a level which ensures that material does not spill over during transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.33	S6.9	Are excess materials cleaned from decks and exposed fittings before the vessel is moved from the dredging area after dredging?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.34	S6.9	Are the contractor(s) confirmed that the works cause no visible foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the dredging site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.35	S6.9	When the dredged material has been unloaded at the disposal areas, is any material accumulated on the deck or other exposed parts of the vessel removed and placed in the hold or a hopper?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.36	S6.9	Is dredger maintained adequate clearance between vessels and the seabed at all states of the tide and reduce operations speed to ensure that excessive turbidity is not generated by turbulence from vessel movement or propeller wash?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.37	S6.9	Is the contractor shall regularly inspect the silt curtains and check that they are moored and marked to avoid danger to marine traffic? Is regular inspection on the integrity of the silt curtain carried out by the contractor and any damage to the silt curtain shall be repaired by the contractor promptly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.38	S6.9	Are all vessels have a clean ballast system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.39	S6.9	Are all vessels well maintained and inspected before use to limit any potential discharges to the marine environment?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.40	S6.9	Is any discharge of sewage/grey wastewater? Is wastewater from potentially contaminated area on working vessels should be minimized and collected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.41	S6.9	Is any soil waste disposed overboard?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.00		Waste Management				
4.01	S8.5	Is a trip-ticket system implemented to monitor the disposal of C&D and solid wastes at public filling facilities and landfills?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.02	S8.5	Is a recording system implemented to record the amount of wastes generated, recycled and disposed of?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.03	S8.5	Is the Contractor registered as a chemical waste producer?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.04	S8.5	Are chemical waste separated from other waste and collected by a licensed chemical waste collector?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.05	S8.5	Are trip tickets for chemical waste disposal available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.06	S8.5	Is chemical waste reused and recycled on site as far as practicable?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.07	S8.5	Are all containers for chemical waste properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.08	S8.5	Is chemical waste storage area used solely for storage of chemical waste and properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.09	S8.5	Are incompatible chemical wastes stored in different areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.10	S8.5	Is the chemical waste storage area enclosed on at least 3 sides and adequately ventilated?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.11	S8.5	Is an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or of 20% by volume of the chemical waste stored in that area, whichever is the greatest, provide?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.12	S8.5	Are a routine cleaning and maintenance programme implemented for drainage systems, sump pits, and oil interceptors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.13	S8.5	Are sufficient general refuse disposal/collection points provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.14	S8.5	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder
4.15	S8.5	Are appropriate measures adopted to minimize windblown litter and dust during transportation of waste?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.16	S8.5	Are individual collectors for aluminum cans, plastic bottles and packaging material and office paper provided to encourage waste segregation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.17	S8.5	Are C&D wastes sorted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.18	S8.5	Are C&D waste disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.19	S8.5	Are unused C&D materials or chemicals recycled or reused to reduce the quantity of waste?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	S8.5	Are public fill and C&D waste reuse on site as far as practicable to avoid disposal off-site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.21	S8.5	Are the construction materials stored properly to minimize the potential for damage or contamination?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.22	S8.5	Is a dumping license obtained to deliver public fill to public filling areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.00		Landscape and Visual				
5.01	S11.10 & 11.11	Are Is site hoarding provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.02	S11.10 & 11.11	Are vegetation disturbance minimized or soil protected to reduce potential soil erosion?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.03	S11.10 & 11.11	Is construction light oriented away from the sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.04	S11.10 & 11.11	Is grass hydroseeding provided to slopes as soon as the completion of works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.05	S11.10 & 11.11	Are damages to trees outside site boundary due construction works avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.06	S11.10 & 11.11	Are excavation works carried out manually instead of machinery operation within 2.5m vicinity of any preserved trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.07	S11.10 & 11.11	Are the retained and transplanted tree(s) properly protected and in good conditions?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.08	S11.10 & 11.11	Are surgery works carried out for damaged trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.00		Ecology				
6.01	S9.7	Is site runoff properly treated to prevent any silty runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.02	S9.7	Are silt trap installed and well-maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.03	S9.7	Are stockpiles properly covered to avoid generating silty runoff?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.04	S9.7	Are construction works restricted to works area which are clearly defined?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.05	S9.7	For slope mitigation works within the Clear Water Bay Country Park, are tree felling and damages to trees, the exact locations of the flexible barrier foundation plates, soil nails and rock dowels adjusted during detailed design, and a setback distance from existing trees is recommended to be maintained as far as practical?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.06	S9.7	Are pruning of tree canopies along the alignment of the flexible barriers limited to a minimum?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.07	S9.7	Are the alignment of flexible barriers optimized to preserve all species of conservation interest and minimize the impact to the existing vegetation as far as practicable? Are the alignment of flexible barriers positioned at minimum 1.5 m in a radius away from these individuals?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.08	S9.7	At the detailed design stage prior to the commencement of the slope mitigation works, is vegetation survey carried out at the slope mitigation areas within the Clear Water Bay	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
		Country Park to assess the condition and identify the location of each individual of <i>Marsdenia lachnostoma</i> and other flora species of conservation interest that may be directly affected by the construction works?				
6.09	S9.7	Is temporary fencing installed to fence off the concerned species either in groups or individually within the works area and in the close proximity to prevent from being damaged and disturbed during construction? Is a sign identifying the site attached to the fence and flagging tape shall be attached to the individuals to visualize their locations?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.10	S9.7	Is a specification for fencing and demarcating individuals of <i>Marsdenia lachnostoma</i> (or other flora species of conservation interest, if found) adjacent to the proposed alignment of the flexible barriers prepared to protect the species?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.11	S9.7	Is any induction training provided to all site personnel in order to brief them on this flora of conservation interest including the locations and their importance?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.12	S9.7	Is the resident site supervisory staff closely monitor the conditions of concerned individuals during construction of flexible barriers in the close proximity?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.13	S9.7	Are fences erected along the boundary of the works area before the commencement of works to prevent vehicle movements and encroachment of personnel onto adjacent areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.14	S9.7	Is regular check of the work site boundaries performed to ensure that they are not breached and that damage does not occur to surrounding areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Is any damage and disturbance avoided, particularly those caused by filling and illegal dumping, to the surrounding habitats through proper management of waste disposal?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.16	S9.7	Are temporarily affected areas reinstated, particularly the habitats of plantation and shrubland-grassland immediately after completion of construction works, through on-site tree/shrub planting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Are affected habitats within the Clear Water Bay Country Bay reinstated by hydro-seeding and planting of climbers and native shrub seedlings where practical upon completion of the slope mitigation works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.00		Landfill Gas Hazard				
7.01	S12.7	Are the safety procedures implemented to minimise the risks of fires and explosions, asphyxiation of works and toxicity effects during all works?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.02	S12.7	Are the gas detection equipment and precautions being used during trenching and excavation as well as creation of confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.03	S12.7	Are the training with regard to the awareness of potential hazards of working in confined spaces provided from the Contractor to the workers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.04	S12.7	Are the safety officers trained with regard to landfill gas and leachate related hazards and presented on the site throughout the works undertaken below grade?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.05	S12.7	Are the all personnel working on site and all visitor made aware of the possibility of ignition of gas, the possible presence of contaminated water and the need to avoid physical contact?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
7.06	S12.7	Is the monitoring of landfill gas being undertaken in all excavations, manholes, chambers and any confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.07	S12.7	Are the monitoring frequency and areas being specified by the safety officers or appropriately qualified person? Are the all measurements being recorded and documented?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.08	S12.7	Is the drilling proceeded with adequate care and precautions against the potential hazards?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.09	S12.7	Is the method statement covering all normal and emergency procedures provided by the drilling contractor prior to the commencement of the site works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.10	S12.7	Are the below ground services entries being sealed to prevent gas entry? Are the grilled metal covers being used for below grade cable trenches?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.11	S12.7	Is each manhole or utility pit monitored with two measurements (at mid-depth and base) for minimum of 10 minutes? Is the steady reading and peak reading recorded at each manhole or utility pit?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.12	S12.7	Are the warning signs of the hazards of landfill gas and its possible presence on site posted in prominent places?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8.00		Overall				
8.01		Is the EM&A properly implemented in general?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Remark / Follow up of Observation(s) and Non-compliance(s) of Last Weekly Site Inspection:

Reminder

- 1.) Base soil along the open channel shall be cover with tarpaulin.
No water shall be discharged to the open channel.
- 2.) General refuse ^{around} along the ActiDATA building shall be removed.
- 3.) ~~Housekeeping~~

Signatures:

ET
Representative

(Name: *Louis Kwok*)

Contractor's
Representative

(Name: *Titus Tang*)

Supervising Officer's
Representative

(Name: *Raymond
Wong*)

IEC's
Representative

(Name: *Louis
Kwan*)

WSD's
Representative

(Name:)



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

WEEKLY ENVIRONMENTAL INSPECTION CHECKLIST

Inspection Date: 14/6/2022 Inspected by: ET: Jacky Leung SO: Raymond Kok WSD: _____
 Contractor: Hickory Team IEC: Louis Kwan

Inspection Time: 14:30

Weather							
Condition	<input type="checkbox"/> Sunny	<input type="checkbox"/> Fine	<input type="checkbox"/> Overcast	<input type="checkbox"/> Drizzle	<input checked="" type="checkbox"/> Rain	<input type="checkbox"/> Storm	<input type="checkbox"/> Hazy
Temperature	<input type="text" value="27"/> C		Humidity	<input type="checkbox"/> High	<input type="checkbox"/> Moderate	<input type="checkbox"/> Low	
Wind	<input type="checkbox"/> Calm	<input type="checkbox"/> Light	<input checked="" type="checkbox"/> Breeze	<input type="checkbox"/> Strong			

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
0.00		General				
0.01		Is the current Environmental Permit displayed conspicuously at all vehicle site entrances/exits for public's information at any time?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
0.02		Is ET Leader's log-book kept readily available for inspections?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.00		Construction Dust				
1.01	S4.8.1	Are dusty materials, such as excavated materials, building debris and construction materials, and exposed earth surface properly covered to prevent dust emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.02	S4.8.1	Are screenings, enclosures, water spraying or vacuum cleaning devices provided to dusty construction works for dust suppression?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03	S4.8.1	Are fumes or smoke emitting plants or construction activities shielded by a screen?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04	S4.8.1	Are wheel-washing facilities with high-pressure water jets provided at all site exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.05	S4.8.1	Is wheel-washing provided to all vehicles leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.06	S4.8.1	Are road section near the site exit free from dusty material?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.07	S4.8.1	Are all main haul roads inside the site paved or sprayed with water to minimize dust emission during vehicle movement?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.08	S4.8.1	Are water spraying provided immediately prior to any loading or transfer of dusty materials?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	S4.8.1	Are covers provided to all dump trucks carrying dusty materials when entering and leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.10	S4.8.1	Are the working areas for uprooting of trees, shrubs, or vegetation or the removal of boulders, poles, pillars sprayed with water to maintain the entire surface wet?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	S4.8.1	Is exposed earth properly treated within six months after the last construction activity on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12	S4.8.1	Does the operation of plants on site free form dark smoke emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
1.13	S4.8.1	Are vehicles travelling at speed not exceeding 15km/hr within the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.14	S4.8.1	Are stock of more than 20 bags of cement or day PFA covered or sheltered on top and 3 sides?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	S4.8.1	Are de-bagging, batching and mixing processes of bagged cement carried out in sheltered areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16	S4.8.1	Are hoarding of at least 2.4m high provided along the site boundary adjoining areas accessible by the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17	S4.8.1	Is open burning prohibited?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.00		Construction Noise (Airborne)				
2.01	S5.7	Are quiet plants adopted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.02	S5.7	Are the PME's operating on site well-maintained to minimize the generation of excessive noise?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.03	S5.7	Are plants throttled down or turned off when not in use?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.04	S5.7	Are the plants known to emit noise strongly in one direction oriented to face away from NSRs?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.05	S5.7	Are moveable barriers provided to screen NSRs from plant or noisy operations?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	S5.7	Are silencers, mufflers and enclosures provided to plants?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.07	S5.7	Are the hoods, cover panels and inspection hatches of PME's closed during operation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.08	S5.7	Are purposely-built site hoarding construction with appropriate materials provided along the site boundary?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.09	S5.7	Are noisy operation properly scheduled to minimize exposure and cumulative impacts to nearby sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.10	S5.7	Are valid noise emission label(s) affixed to all hand-held breakers operating on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.11	S5.7	Are valid noise emission label(s) affixed to all air compressors operating on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	S5.7	Are all construction noise permit(s) applied for percussive piling work?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	S5.7	Are construction noise permit(s) applied for general construction works during restricted hours?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.14	S5.7	Are valid construction noise permit(s) displayed at all vehicular exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.00		Water Quality				
3.01	S6.9	Is effluent discharge license obtained for wastewater discharge from site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.02	S6.9	Is effluent discharged according to the effluent discharge license?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.03	S6.9	Is wastewater discharge from site properly treated prior to discharge?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.04	S6.9	Are perimeter channels provided to intercept storm runoff from outside the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	S6.9	Are sand/silt removal facilities such as sand/silt traps and sediment basins provided to remove sand/silt particles from runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.06	S6.9	Is surface runoff diverted to sedimentation facilities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder 1
3.07	S6.9	Is the drainage system properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder 1
3.08	S6.9	Are construction works carefully programmed to minimize soil excavation works during rainy seasons?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.09	S6.9	Are exposed soil surface protected by paving as soon as possible to reduce the potential of soil erosion?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	S6.9	Are temporary access roads protected by crushed gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.11	S6.9	Are exposed slope surface properly protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	S6.9	Is trench excavation avoided in the wet season as far as practicable, or if necessary, backfilled in short sections after excavation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	S6.9	Are open stockpiles of construction materials on site covered by tarpaulin or similar fabric during construction?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	S6.9	Is runoff from wheel-washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.15	S6.9	Is oil leakage or spillage prevented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.16	S6.9	Are there any measures to prevent the release of oil and grease into the storm drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.17	S6.9	Are the oil interceptors/ grease traps properly maintained?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.18	S6.9	Are debris and rubbish generated on site collected, handled and disposed of properly to avoid them entering the streams?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder 2
3.19	S6.9	Are all fuel tanks and storage areas provided with locks and be sited on sealed areas, within bunds of capacity equal to 110% of the storage capacity of the largest tank?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.20	S6.9	Are tanks, containers, storage area bunded and the locations locked as far as possible from the sensitive watercourse and stormwater drains?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.21	S6.9	Are sufficient chemical toilets provided on site to handle sewage from construction work force?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.22	S6.9	Are sewage disposal and toilet maintenance of the portable chemical toilets provided by the licensed contractors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.23	S6.9	Is concrete washing water properly collected and treated prior to discharge?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.24	S6.9	Is suitable type of silt curtains deployed during dredging to reduce the elevation of suspended solids to nearby sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.25	S6.9	Is closed grab dredger used to reduce the potential leakage of sediments?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.26	S6.9	Is closed grab dredger of 3 to 6 m ³ used for dredging at seawater intake?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.27	S6.9	Is specific work staff assigned the responsibility for monitoring the number of grab dredged per hour? Is number of cycle limited to 20-21 grab per hour for 3m ³ closed grab, 10-11 grab per hour for 6m ³ closed grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.28	S6.9	Is the grab operated in slow and controlled manner such that the impact to seabed by the grab when being lowered could be minimized? Is the operator ensured the grab be properly closed before lifting the grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.29	S6.9	Is the maximum allowed dredging rate at the seawater intake limited to 750 m ³ /day while the maximum allowed dredging rate at the submarine outfall is 3,500 m ³ /day?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.30	S6.9	Is dredged marine sediment disposed of in a gazetted marine disposal area in accordance with marine dumping permit conditions of the Dumping at Sea Ordinance (DASO)?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.31	S6.9	Are disposal vessels fitted with tight bottom seals in order to prevent leakage of material during transport?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.32	S6.9	Are barges filled to a level which ensures that material does not spill over during transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.33	S6.9	Are excess materials cleaned from decks and exposed fittings before the vessel is moved from the dredging area after dredging?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.34	S6.9	Are the contractor(s) confirmed that the works cause no visible foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the dredging site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.35	S6.9	When the dredged material has been unloaded at the disposal areas, is any material accumulated on the deck or other exposed parts of the vessel removed and placed in the hold or a hopper?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.36	S6.9	Is dredger maintained adequate clearance between vessels and the seabed at all states of the tide and reduce operations speed to ensure that excessive turbidity is not generated by turbulence from vessel movement or propeller wash?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.37	S6.9	Is the contractor shall regularly inspect the silt curtains and check that they are moored and marked to avoid danger to marine traffic? Is regular inspection on the integrity of the silt curtain carried out by the contractor and any damage to the silt curtain shall be repaired by the contractor promptly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.38	S6.9	Are all vessels have a clean ballast system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.39	S6.9	Are all vessels well maintained and inspected before use to limit any potential discharges to the marine environment?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.40	S6.9	Is any discharge of sewage/grey wastewater? Is wastewater from potentially contaminated area on working vessels should be minimized and collected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.41	S6.9	Is any soil waste disposed overboard?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.00		Waste Management				
4.01	S8.5	Is a trip-ticket system implemented to monitor the disposal of C&D and solid wastes at public filling facilities and landfills?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.02	S8.5	Is a recording system implemented to record the amount of wastes generated, recycled and disposed of?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.03	S8.5	Is the Contractor registered as a chemical waste producer?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.04	S8.5	Are chemical waste separated from other waste and collected by a licensed chemical waste collector?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.05	S8.5	Are trip tickets for chemical waste disposal available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.06	S8.5	Is chemical waste reused and recycled on site as far as practicable?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.07	S8.5	Are all containers for chemical waste properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.08	S8.5	Is chemical waste storage area used solely for storage of chemical waste and properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.09	S8.5	Are incompatible chemical wastes stored in different areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.10	S8.5	Is the chemical waste storage area enclosed on at least 3 sides and adequately ventilated?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.11	S8.5	Is an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or of 20% by volume of the chemical waste stored in that area, whichever is the greatest, provide?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.12	S8.5	Are a routine cleaning and maintenance programme implemented for drainage systems, sump pits, and oil interceptors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.13	S8.5	Are sufficient general refuse disposal/collection points provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.14	S8.5	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder
4.15	S8.5	Are appropriate measures adopted to minimize windblown litter and dust during transportation of waste?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.16	S8.5	Are individual collectors for aluminum cans, plastic bottles and packaging material and office paper provided to encourage waste segregation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.17	S8.5	Are C&D wastes sorted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.18	S8.5	Are C&D waste disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.19	S8.5	Are unused C&D materials or chemicals recycled or reused to reduce the quantity of waste?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	S8.5	Are public fill and C&D waste reuse on site as far as practicable to avoid disposal off-site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.21	S8.5	Are the construction materials stored properly to minimize the potential for damage or contamination?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.22	S8.5	Is a dumping license obtained to deliver public fill to public filling areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.00		Landscape and Visual				
5.01	S11.10 & 11.11	Are Is site hoarding provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.02	S11.10 & 11.11	Are vegetation disturbance minimized or soil protected to reduce potential soil erosion?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.03	S11.10 & 11.11	Is construction light oriented away from the sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.04	S11.10 & 11.11	Is grass hydroseeding provided to slopes as soon as the completion of works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.05	S11.10 & 11.11	Are damages to trees outside site boundary due construction works avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.06	S11.10 & 11.11	Is excavation works carried out manually instead of machinery operation within 2.5m vicinity of any preserved trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.07	S11.10 & 11.11	Are the retained and transplanted tree(s) properly protected and in good conditions?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.08	S11.10 & 11.11	Are surgery works carried out for damaged trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.00		Ecology				
6.01	S9.7	Is site runoff properly treated to prevent any silty runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.02	S9.7	Are silt trap installed and well-maintained?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Reminder!
6.03	S9.7	Are stockpiles properly covered to avoid generating silty runoff?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.04	S9.7	Are construction works restricted to works area which are clearly defined?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.05	S9.7	For slope mitigation works within the Clear Water Bay Country Park, are tree felling and damages to trees, the exact locations of the flexible barrier foundation plates, soil nails and rock dowels adjusted during detailed design, and a setback distance from existing trees is recommended to be maintained as far as practical?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.06	S9.7	Are pruning of tree canopies along the alignment of the flexible barriers limited to a minimum?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.07	S9.7	Are the alignment of flexible barriers optimized to preserve all species of conservation interest and minimize the impact to the existing vegetation as far as practicable? Are the alignment of flexible barriers positioned at minimum 1.5 m in a radius away from these individuals?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.08	S9.7	At the detailed design stage prior to the commencement of the slope mitigation works, is vegetation survey carried out at the slope mitigation areas within the Clear Water Bay	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
		Country Park to assess the condition and identify the location of each individual of Marsdenia lachnostoma and other flora species of conservation interest that may be directly affected by the construction works?				
6.09	S9.7	Is temporary fencing installed to fence off the concerned species either in groups of individually within the works area and in the close proximity to prevent from being damaged and disturbed during construction? Is a sign identifying the site attached to the fence and flagging tape shall be attached to the individuals to visualize their locations?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.10	S9.7	Is a specification for fencing and demarcating individuals of Marsdenia lachnostoma (or other flora species of conservation interest, if found) adjacent to the proposed alignment of the flexible barriers prepared to protect the species?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.11	S9.7	Is any induction training provided to all site personnel in order to brief them on this flora of conservation interest including the locations and their importance?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.12	S9.7	Is the resident site supervisory staff closely monitor the conditions of concerned individuals during construction of flexible barriers in the close proximity?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.13	S9.7	Are fences erected along the boundary of the works area before the commencement of works to prevent vehicle movements and encroachment of personnel onto adjacent areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.14	S9.7	Is regular check of the work site boundaries performed to ensure that they are not breached and that damage does not occur to surrounding areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Is any damage and disturbance avoided, particularly those caused by filling and illegal dumping, to the surrounding habitats through proper management of waste disposal?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.16	S9.7	Are temporarily affected areas reinstated, particularly the habitats of plantation and shrubland-grassland immediately after completion of construction works, through on-site tree/shrub planting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Are affected habitats within the Clear Water Bay Country Bay reinstated by hydro-seeding and planting of climbers and native shrub seedlings where practical upon completion of the slope mitigation works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.00		Landfill Gas Hazard				
7.01	S12.7	Are the safety procedures implemented to minimise the risks of fires and explosions, asphyxiation of works and toxicity effects during all works?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.02	S12.7	Are the gas detection equipment and precautions being used during trenching and excavation as well as creation of confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.03	S12.7	Are the training with regard to the awareness of potential hazards of working in confined spaces provided from the Contractor to the workers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.04	S12.7	Are the safety officers trained with regard to landfill gas and leachate related hazards and presented on the site throughout the works undertaken below grade?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.05	S12.7	Are the all personnel working on site and all visitor made aware of the possibility of ignition of gas, the possible presence of contaminated water and the need to avoid physical contact?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
7.06	S12.7	Is the monitoring of landfill gas being undertaken in all excavations, manholes, chambers and any confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.07	S12.7	Are the monitoring frequency and areas being specified by the safety officers or appropriately qualified person? Are the all measurements being recorded and documented?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.08	S12.7	Is the drilling proceeded with adequate care and precautions against the potential hazards?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.09	S12.7	Is the method statement covering all normal and emergency procedures provided by the drilling contractor prior to the commencement of the site works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.10	S12.7	Are the below ground services entries being sealed to prevent gas entry? Are the grilled metal covers being used for below grade cable trenches?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.11	S12.7	Is each manhole or utility pit monitored with two measurements (at mid-depth and base) for minimum of 10 minutes? Is the steady reading and peak reading recorded at each manhole or utility pit?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.12	S12.7	Are the warning signs of the hazards of landfill gas and its possible presence on site posted in prominent places?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8.00		Overall				
8.01		Is the EM&A properly implemented in general?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Remark / Follow up of Observation(s) and Non-compliance(s) of Last Weekly Site Inspection:

Reminder

- 1.) Control muddy water into the open channel before raining weather. Check drainage according to the drawing plan.
- 2.) Remove the plastic refuse from the open channel.
(both sides)

Signatures:

ET
Representative

(Name: *[Signature]*)

Contractor's
Representative

(Name: *Tiffany Tsang*)

Supervising Officer's
Representative

(Name: *Raymond
Wong*)

IEC's
Representative

(Name: *Louis
Kwan*)

WSD's
Representative

(Name:)



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

WEEKLY ENVIRONMENTAL INSPECTION CHECKLIST

Inspection Date: 21/6/2012 Inspected by: ET: Jacky Leung SO: Derek Lai WSD: _____
 Contractor: Timothy Wong IEC: Louis Kwan

Inspection Time: 14:30

Weather							
Condition	<input checked="" type="checkbox"/> Sunny	<input type="checkbox"/> Fine	<input type="checkbox"/> Overcast	<input type="checkbox"/> Drizzle	<input type="checkbox"/> Rain	<input type="checkbox"/> Storm	<input type="checkbox"/> Hazy
Temperature	<input type="checkbox"/> 28	C		Humidity	<input checked="" type="checkbox"/> High	<input type="checkbox"/> Moderate	<input type="checkbox"/> Low
Wind	<input type="checkbox"/> Calm	<input checked="" type="checkbox"/> Light	<input type="checkbox"/> Breeze	<input type="checkbox"/> Strong			

Item No.	EIA ref.	Description	N/A	Yes	No	Photo/Remarks
0.00		General				
0.01		Is the current Environmental Permit displayed conspicuously at all vehicle site entrances/exits for public's information at any time?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
0.02		Is ET Leader's log-book kept readily available for inspections?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.00		Construction Dust				
1.01	S4.8.1	Are dusty materials, such as excavated materials, building debris and construction materials, and exposed earth surface properly covered to prevent dust emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.02	S4.8.1	Are screenings, enclosures, water spraying or vacuum cleaning devices provided to dusty construction works for dust suppression?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03	S4.8.1	Are fumes or smoke emitting plants or construction activities shielded by a screen?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04	S4.8.1	Are wheel-washing facilities with high-pressure water jets provided at all site exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.05	S4.8.1	Is wheel-washing provided to all vehicles leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.06	S4.8.1	Are road section near the site exit free from dusty material?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.07	S4.8.1	Are all main haul roads inside the site paved or sprayed with water to minimize dust emission during vehicle movement?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>Reminder 3</u>
1.08	S4.8.1	Are water spraying provided immediately prior to any loading or transfer of dusty materials?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	S4.8.1	Are covers provided to all dump trucks carrying dusty materials when entering and leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.10	S4.8.1	Are the working areas for uprooting of trees, shrubs, or vegetation or the removal of boulders, poles, pillars sprayed with water to maintain the entire surface wet?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	S4.8.1	Is exposed earth properly treated within six months after the last construction activity on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12	S4.8.1	Does the operation of plants on site free form dark smoke emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
1.13	S4.8.1	Are vehicles travelling at speed not exceeding 15km/hr within the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.14	S4.8.1	Are stock of more than 20 bags of cement or day PFA covered or sheltered on top and 3 sides?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	S4.8.1	Are de-bagging, batching and mixing processes of bagged cement carried out in sheltered areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16	S4.8.1	Are hoarding of at least 2.4m high provided along the site boundary adjoining areas accessible by the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17	S4.8.1	Is open burning prohibited?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.00		Construction Noise (Airborne)				
2.01	S5.7	Are quiet plants adopted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.02	S5.7	Are the PMEs operating on site well-maintained to minimize the generation of excessive noise?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.03	S5.7	Are plants throttled down or turned off when not in use?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.04	S5.7	Are the plants known to emit noise strongly in one direction oriented to face away from NSRs?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.05	S5.7	Are moveable barriers provided to screen NSRs from plant or noisy operations?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	S5.7	Are silencers, mufflers and enclosures provided to plants?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.07	S5.7	Are the hoods, cover panels and inspection hatches of PMEs closed during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.08	S5.7	Are purposely-built site hoarding construction with appropriate materials provided along the site boundary?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.09	S5.7	Are noisy operation properly scheduled to minimize exposure and cumulative impacts to nearby sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.10	S5.7	Are valid noise emission label(s) affixed to all hand-held breakers operating on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.11	S5.7	Are valid noise emission label(s) affixed to all air compressors operating on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	S5.7	Are all construction noise permit(s) applied for percussive piling work?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	S5.7	Are construction noise permit(s) applied for general construction works during restricted hours?	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.14	S5.7	Are valid construction noise permit(s) displayed at all vehicular exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.00		Water Quality				
3.01	S6.9	Is effluent discharge license obtained for wastewater discharge from site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.02	S6.9	Is effluent discharged according to the effluent discharge license?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.03	S6.9	Is wastewater discharge from site properly treated prior to discharge?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.04	S6.9	Are perimeter channels provided to intercept storm runoff from outside the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	S6.9	Are sand/silt removal facilities such as sand/silt traps and sediment basins provided to remove sand/silt particles from runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.06	S6.9	Is surface runoff diverted to sedimentation facilities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.07	S6.9	Is the drainage system properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.08	S6.9	Are construction works carefully programmed to minimize soil excavation works during rainy seasons?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.09	S6.9	Are exposed soil surface protected by paving as soon as possible to reduce the potential of soil erosion?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	S6.9	Are temporary access roads protected by crushed gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.11	S6.9	Are exposed slope surface properly protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	S6.9	Is trench excavation avoided in the wet season as far as practicable, or if necessary, backfilled in short sections after excavation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	S6.9	Are open stockpiles of construction materials on site covered by tarpaulin or similar fabric during construction?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	S6.9	Is runoff from wheel-washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.15	S6.9	Is oil leakage or spillage prevented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.16	S6.9	Are there any measures to prevent the release of oil and grease into the storm drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.17	S6.9	Are the oil interceptors/ grease traps properly maintained?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.18	S6.9	Are debris and rubbish generated on site collected, handled and disposed of properly to avoid them entering the streams?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.19	S6.9	Are all fuel tanks and storage areas provided with locks and be sited on sealed areas, within bunds of capacity equal to 110% of the storage capacity of the largest tank?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.20	S6.9	Are tanks, containers, storage area bunded and the locations locked as far as possible from the sensitive watercourse and stormwater drains?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.21	S6.9	Are sufficient chemical toilets provided on site to handle sewage from construction work force?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.22	S6.9	Are sewage disposal and toilet maintenance of the portable chemical toilets provided by the licensed contractors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.23	S6.9	Is concrete washing water properly collected and treated prior to discharge?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.24	S6.9	Is suitable type of silt curtains deployed during dredging to reduce the elevation of suspended solids to nearby sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.25	S6.9	Is closed grab dredger used to reduce the potential leakage of sediments?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.26	S6.9	Is closed grab dredger of 3 to 6 m ³ used for dredging at seawater intake?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.27	S6.9	Is specific work staff assigned the responsibility for monitoring the number of grab dredged per hour? Is number of cycle limited to 20-21 grab per hour for 3m ³ closed grab, 10-11 grab per hour for 6m ³ closed grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.28	S6.9	Is the grab operated in slow and controlled manner such that the impact to seabed by the grab when being lowered could be minimized? Is the operator ensured the grab be properly closed before lifting the grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.29	S6.9	Is the maximum allowed dredging rate at the seawater intake limited to 750 m ³ /day while the maximum allowed dredging rate at the submarine outfall is 3,500 m ³ /day?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.30	S6.9	Is dredged marine sediment disposed of in a gazetted marine disposal area in accordance with marine dumping permit conditions of the Dumping at Sea Ordinance (DASO)?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.31	S6.9	Are disposal vessels fitted with tight bottom seals in order to prevent leakage of material during transport?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.32	S6.9	Are barges filled to a level which ensures that material does not spill over during transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.33	S6.9	Are excess materials cleaned from decks and exposed fittings before the vessel is moved from the dredging area after dredging?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.34	S6.9	Are the contractor(s) confirmed that the works cause no visible foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the dredging site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.35	S6.9	When the dredged material has been unloaded at the disposal areas, is any material accumulated on the deck or other exposed parts of the vessel removed and placed in the hold or a hopper?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.36	S6.9	Is dredger maintained adequate clearance between vessels and the seabed at all states of the tide and reduce operations speed to ensure that excessive turbidity is not generated by turbulence from vessel movement or propeller wash?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.37	S6.9	Is the contractor shall regularly inspect the silt curtains and check that they are moored and marked to avoid danger to marine traffic? Is regular inspection on the integrity of the silt curtain carried out by the contractor and any damage to the silt curtain shall be repaired by the contractor promptly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.38	S6.9	Are all vessels have a clean ballast system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.39	S6.9	Are all vessels well maintained and inspected before use to limit any potential discharges to the marine environment?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.40	S6.9	Is any discharge of sewage/grey wastewater? Is wastewater from potentially contaminated area on working vessels should be minimized and collected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.41	S6.9	Is any soil waste disposed overboard?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.00		Waste Management				
4.01	S8.5	Is a trip-ticket system implemented to monitor the disposal of C&D and solid wastes at public filling facilities and landfills?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.02	S8.5	Is a recording system implemented to record the amount of wastes generated, recycled and disposed of?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.03	S8.5	Is the Contractor registered as a chemical waste producer?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.04	S8.5	Are chemical waste separated from other waste and collected by a licensed chemical waste collector?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.05	S8.5	Are trip tickets for chemical waste disposal available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.06	S8.5	Is chemical waste reused and recycled on site as far as practicable?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.07	S8.5	Are all containers for chemical waste properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.08	S8.5	Is chemical waste storage area used solely for storage of chemical waste and properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.09	S8.5	Are incompatible chemical wastes stored in different areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.10	S8.5	Is the chemical waste storage area enclosed on at least 3 sides and adequately ventilated?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.11	S8.5	Is an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or of 20% by volume of the chemical waste stored in that area, whichever is the greatest, provide?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.12	S8.5	Are a routine cleaning and maintenance programme implemented for drainage systems, sump pits, and oil interceptors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.13	S8.5	Are sufficient general refuse disposal/collection points provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.14	S8.5	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder 2
4.15	S8.5	Are appropriate measures adopted to minimize windblown litter and dust during transportation of waste?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.16	S8.5	Are individual collectors for aluminum cans, plastic bottles and packaging material and office paper provided to encourage waste segregation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.17	S8.5	Are C&D wastes sorted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.18	S8.5	Are C&D waste disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.19	S8.5	Are unused C&D materials or chemicals recycled or reused to reduce the quantity of waste?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	S8.5	Are public fill and C&D waste reuse on site as far as practicable to avoid disposal off-site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.21	S8.5	Are the construction materials stored properly to minimize the potential for damage or contamination?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.22	S8.5	Is a dumping license obtained to deliver public fill to public filling areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.00		Landscape and Visual				
5.01	S11.10 & 11.11	Are Is site hoarding provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.02	S11.10 & 11.11	Are vegetation disturbance minimized or soil protected to reduce potential soil erosion?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.03	S11.10 & 11.11	Is construction light oriented away from the sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.04	S11.10 & 11.11	Is grass hydroseeding provided to slopes as soon as the completion of works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.05	S11.10 & 11.11	Are damages to trees outside site boundary due construction works avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder!
5.06	S11.10 & 11.11	Is excavation works carried out manually instead of machinery operation within 2.5m vicinity of any preserved trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.07	S11.10 & 11.11	Are the retained and transplanted tree(s) properly protected and in good conditions?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.08	S11.10 & 11.11	Are surgery works carried out for damaged trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.00		Ecology				
6.01	S9.7	Is site runoff properly treated to prevent any silty runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.02	S9.7	Are silt trap installed and well-maintained?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.03	S9.7	Are stockpiles properly covered to avoid generating silty runoff?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.04	S9.7	Are construction works restricted to works area which are clearly defined?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.05	S9.7	For slope mitigation works within the Clear Water Bay Country Park, are tree felling and damages to trees, the exact locations of the flexible barrier foundation plates, soil nails and rock dowels adjusted during detailed design, and a setback distance from existing trees is recommended to be maintained as far as practical?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.06	S9.7	Are pruning of tree canopies along the alignment of the flexible barriers limited to a minimum?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.07	S9.7	Are the alignment of flexible barriers optimized to preserve all species of conservation interest and minimize the impact to the existing vegetation as far as practicable? Are the alignment of flexible barriers positioned at minimum 1.5 m in a radius away from these individuals?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.08	S9.7	At the detailed design stage prior to the commencement of the slope mitigation works, is vegetation survey carried out at the slope mitigation areas within the Clear Water Bay	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
		Country Park to assess the condition and identify the location of each individual of Marsdenia lachnostoma and other flora species of conservation interest that may be directly affected by the construction works?				
6.09	S9.7	Is temporary fencing installed to fence off the concerned species either in groups of individually within the works area and in the close proximity to prevent from being damaged and disturbed during construction? Is a sign identifying the site attached to the fence and flagging tape shall be attached to the individuals to visualize their locations?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.10	S9.7	Is a specification for fencing and demarcating individuals of Marsdenia lachnostoma (or other flora species of conservation interest, if found) adjacent to the proposed alignment of the flexible barriers prepared to protect the species?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.11	S9.7	Is any induction training provided to all site personnel in order to brief them on this flora of conservation interest including the locations and their importance?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.12	S9.7	Is the resident site supervisory staff closely monitor the conditions of concerned individuals during construction of flexible barriers in the close proximity?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.13	S9.7	Are fences erected along the boundary of the works area before the commencement of works to prevent vehicle movements and encroachment of personnel onto adjacent areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.14	S9.7	Is regular check of the work site boundaries performed to ensure that they are not breached and that damage does not occur to surrounding areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Is any damage and disturbance avoided, particularly those caused by filling and illegal dumping, to the surrounding habitats through proper management of waste disposal?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.16	S9.7	Are temporarily affected areas reinstated, particularly the habitats of plantation and shrubland-grassland immediately after completion of construction works, through on-site tree/shrub planting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Are affected habitats within the Clear Water Bay Country Bay reinstated by hydro-seeding and planting of climbers and native shrub seedlings where practical upon completion of the slope mitigation works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.00		Landfill Gas Hazard				
7.01	S12.7	Are the safety procedures implemented to minimise the risks of fires and explosions, asphyxiation of works and toxicity effects during all works?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.02	S12.7	Are the gas detection equipment and precautions being used during trenching and excavation as well as creation of confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.03	S12.7	Are the training with regard to the awareness of potential hazards of working in confined spaces provided from the Contractor to the workers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.04	S12.7	Are the safety officers trained with regard to landfill gas and leachate related hazards and presented on the site throughout the works undertaken below grade?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.05	S12.7	Are the all personnel working on site and all visitor made aware of the possibility of ignition of gas, the possible presence of contaminated water and the need to avoid physical contact?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
7.06	S12.7	Is the monitoring of landfill gas being undertaken in all excavations, manholes, chambers and any confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	_____
7.07	S12.7	Are the monitoring frequency and areas being specified by the safety officers or appropriately qualified person? Are the all measurements being recorded and documented?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
7.08	S12.7	Is the drilling proceeded with adequate care and precautions against the potential hazards?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
7.09	S12.7	Is the method statement covering all normal and emergency procedures provided by the drilling contractor prior to the commencement of the site works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
7.10	S12.7	Are the below ground services entries being sealed to prevent gas entry? Are the grilled metal covers being used for below grade cable trenches?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
7.11	S12.7	Is each manhole or utility pit monitored with two measurements (at mid-depth and base) for minimum of 10 minutes? Is the steady reading and peak reading recorded at each manhole or utility pit?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	_____
7.12	S12.7	Are the warning signs of the hazards of landfill gas and its possible presence on site posted in prominent places?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	_____
8.00		Overall				
8.01		Is the EM&A properly implemented in general?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	_____



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Remark / Follow up of Observation(s) and Non-compliance(s) of Last Weekly Site Inspection:

- Reminders
- 1.) Tree protection along the open cut near the open channel.
 - 2.) The contractors are reminded to remove the repair (i.e. water bottles, ~~along the Acti-DAPT building~~ and ~~around~~
 - 3.) More frequent water spraying along the haul road and during drilling.

Signatures:

ET Representative

(Name: *[Signature]*)

Contractor's Representative

(Name: *Tiffany Tsang*)

Supervising Officer's Representative

(Name: *David Lewi*)

IEC's Representative

(Name: *Louis Kwam*)

WSD's Representative

(Name:)



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

WEEKLY ENVIRONMENTAL INSPECTION CHECKLIST

Inspection Date: 28/6/2020 Inspected by: ET: Jacky Wong SO: Raymond Kok WSD: _____
 Contractor: T. Kwan Tong IEC: Joce Kwan

Inspection Time: 09:15-11:00

Weather							
Condition	<input checked="" type="checkbox"/> Sunny	<input type="checkbox"/> Fine	<input type="checkbox"/> Overcast	<input type="checkbox"/> Drizzle	<input type="checkbox"/> Rain	<input type="checkbox"/> Storm	<input type="checkbox"/> Hazy
Temperature	<input checked="" type="checkbox"/> 29 C		Humidity	<input type="checkbox"/> High	<input type="checkbox"/> Moderate	<input type="checkbox"/> Low	
Wind	<input checked="" type="checkbox"/> calm	<input type="checkbox"/> light	<input type="checkbox"/> Breeze	<input type="checkbox"/> Strong			

Item No.	EIA ref.	Description	N/A	Yes	No	Photo/Remarks
0.00		General				
0.01		Is the current Environmental Permit displayed conspicuously at all vehicle site entrances/exits for public's information at any time?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
0.02		Is ET Leader's log-book kept readily available for inspections?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.00		Construction Dust				
1.01	S4.8.1	Are dusty materials, such as excavated materials, building debris and construction materials, and exposed earth surface properly covered to prevent dust emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>Reminders</u>
1.02	S4.8.1	Are screenings, enclosures, water spraying or vacuum cleaning devices provided to dusty construction works for dust suppression?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.03	S4.8.1	Are fumes or smoke emitting plants or construction activities shielded by a screen?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.04	S4.8.1	Are wheel-washing facilities with high-pressure water jets provided at all site exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.05	S4.8.1	Is wheel-washing provided to all vehicles leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.06	S4.8.1	Are road section near the site exit free from dusty material?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.07	S4.8.1	Are all main haul roads inside the site paved or sprayed with water to minimize dust emission during vehicle movement?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.08	S4.8.1	Are water spraying provided immediately prior to any loading or transfer of dusty materials?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.09	S4.8.1	Are covers provided to all dump trucks carrying dusty materials when entering and leaving the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.10	S4.8.1	Are the working areas for uprooting of trees, shrubs, or vegetation or the removal of boulders, poles, pillars sprayed with water to maintain the entire surface wet?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.11	S4.8.1	Is exposed earth properly treated within six months after the last construction activity on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.12	S4.8.1	Does the operation of plants on site free form dark smoke emission?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
1.13	S4.8.1	Are vehicles travelling at speed not exceeding 15km/hr within the site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1.14	S4.8.1	Are stock of more than 20 bags of cement or day PFA covered or sheltered on top and 3 sides?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.15	S4.8.1	Are de-bagging, batching and mixing processes of bagged cement carried out in sheltered areas?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.16	S4.8.1	Are hoarding of at least 2.4m high provided along the site boundary adjoining areas accessible by the public?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
1.17	S4.8.1	Is open burning prohibited?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.00		Construction Noise (Airborne)				
2.01	S5.7	Are quiet plants adopted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.02	S5.7	Are the PMEs operating on site well-maintained to minimize the generation of excessive noise?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.03	S5.7	Are plants throttled down or turned off when not in use?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.04	S5.7	Are the plants known to emit noise strongly in one direction oriented to face away from NSRs?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.05	S5.7	Are moveable barriers provided to screen NSRs from plant or noisy operations?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.06	S5.7	Are silencers, mufflers and enclosures provided to plants?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.07	S5.7	Are the hoods, cover panels and inspection hatches of PMEs closed during operation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.08	S5.7	Are purposely-built site hoarding construction with appropriate materials provided along the site boundary?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.09	S5.7	Are noisy operation properly scheduled to minimize exposure and cumulative impacts to nearby sensitive receivers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.10	S5.7	Are valid noise emission label(s) affixed to all hand-held breakers operating on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.11	S5.7	Are valid noise emission label(s) affixed to all air compressors operating on site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.12	S5.7	Are all construction noise permit(s) applied for percussive piling work?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
2.13	S5.7	Are construction noise permit(s) applied for general construction works during restricted hours?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2.14	S5.7	Are valid construction noise permit(s) displayed at all vehicular exits?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.00		Water Quality				
3.01	S6.9	Is effluent discharge license obtained for wastewater discharge from site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.02	S6.9	Is effluent discharged according to the effluent discharge license?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.03	S6.9	Is wastewater discharge from site properly treated prior to discharge?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.04	S6.9	Are perimeter channels provided to intercept storm runoff from outside the site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.05	S6.9	Are sand/silt removal facilities such as sand/silt traps and sediment basins provided to remove sand/silt particles from runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.06	S6.9	Is surface runoff diverted to sedimentation facilities?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.07	S6.9	Is the drainage system properly maintained?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.08	S6.9	Are construction works carefully programmed to minimize soil excavation works during rainy seasons?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.09	S6.9	Are exposed soil surface protected by paving as soon as possible to reduce the potential of soil erosion?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.10	S6.9	Are temporary access roads protected by crushed gravel?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.11	S6.9	Are exposed slope surface properly protected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.12	S6.9	Is trench excavation avoided in the wet season as far as practicable, or if necessary, backfilled in short sections after excavation?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.13	S6.9	Are open stockpiles of construction materials on site covered by tarpaulin or similar fabric during construction?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.14	S6.9	Is runoff from wheel-washing facilities avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.15	S6.9	Is oil leakage or spillage prevented?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.16	S6.9	Are there any measures to prevent the release of oil and grease into the storm drainage system?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.17	S6.9	Are the oil interceptors/ grease traps properly maintained?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.18	S6.9	Are debris and rubbish generated on site collected, handled and disposed of properly to avoid them entering the streams?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.19	S6.9	Are all fuel tanks and storage areas provided with locks and be sited on sealed areas, within bunds of capacity equal to 110% of the storage capacity of the largest tank?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.20	S6.9	Are tanks, containers, storage area bunded and the locations locked as far as possible from the sensitive watercourse and stormwater drains?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.21	S6.9	Are sufficient chemical toilets provided on site to handle sewage from construction work force?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.22	S6.9	Are sewage disposal and toilet maintenance of the portable chemical toilets provided by the licensed contractors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3.23	S6.9	Is concrete washing water properly collected and treated prior to discharge?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.24	S6.9	Is suitable type of silt curtains deployed during dredging to reduce the elevation of suspended solids to nearby sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.25	S6.9	Is closed grab dredger used to reduce the potential leakage of sediments?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
3.26	S6.9	Is closed grab dredger of 3 to 6 m ³ used for dredging at seawater intake?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.27	S6.9	Is specific work staff assigned the responsibility for monitoring the number of grab dredged per hour? Is number of cycle limited to 20-21 grab per hour for 3m ³ closed grab, 10-11 grab per hour for 6m ³ closed grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.28	S6.9	Is the grab operated in slow and controlled manner such that the impact to seabed by the grab when being lowered could be minimized? Is the operator ensured the grab be properly closed before lifting the grab?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.29	S6.9	Is the maximum allowed dredging rate at the seawater intake limited to 750 m ³ /day while the maximum allowed dredging rate at the submarine outfall is 3,500 m ³ /day?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.30	S6.9	Is dredged marine sediment disposed of in a gazetted marine disposal area in accordance with marine dumping permit conditions of the Dumping at Sea Ordinance (DASO)?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.31	S6.9	Are disposal vessels fitted with tight bottom seals in order to prevent leakage of material during transport?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.32	S6.9	Are barges filled to a level which ensures that material does not spill over during transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.33	S6.9	Are excess materials cleaned from decks and exposed fittings before the vessel is moved from the dredging area after dredging?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.34	S6.9	Are the contractor(s) confirmed that the works cause no visible foam, oil, grease, litter or other objectionable matter to be present in the water within and adjacent to the dredging site?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.35	S6.9	When the dredged material has been unloaded at the disposal areas, is any material accumulated on the deck or other exposed parts of the vessel removed and placed in the hold or a hopper?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.36	S6.9	Is dredger maintained adequate clearance between vessels and the seabed at all states of the tide and reduce operations speed to ensure that excessive turbidity is not generated by turbulence from vessel movement or propeller wash?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.37	S6.9	Is the contractor shall regularly inspect the silt curtains and check that they are moored and marked to avoid danger to marine traffic? Is regular inspection on the integrity of the silt curtain carried out by the contractor and any damage to the silt curtain shall be repaired by the contractor promptly?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.38	S6.9	Are all vessels have a clean ballast system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.39	S6.9	Are all vessels well maintained and inspected before use to limit any potential discharges to the marine environment?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.40	S6.9	Is any discharge of sewage/grey wastewater? Is wastewater from potentially contaminated area on working vessels should be minimized and collected?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3.41	S6.9	Is any soil waste disposed overboard?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.00		Waste Management				
4.01	S8.5	Is a trip-ticket system implemented to monitor the disposal of C&D and solid wastes at public filling facilities and landfills?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.02	S8.5	Is a recording system implemented to record the amount of wastes generated, recycled and disposed of?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.03	S8.5	Is the Contractor registered as a chemical waste producer?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.04	S8.5	Are chemical waste separated from other waste and collected by a licensed chemical waste collector?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.05	S8.5	Are trip tickets for chemical waste disposal available for inspection?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.06	S8.5	Is chemical waste reused and recycled on site as far as practicable?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.07	S8.5	Are all containers for chemical waste properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.08	S8.5	Is chemical waste storage area used solely for storage of chemical waste and properly labelled?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.09	S8.5	Are incompatible chemical wastes stored in different areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.10	S8.5	Is the chemical waste storage area enclosed on at least 3 sides and adequately ventilated?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.11	S8.5	Is an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or of 20% by volume of the chemical waste stored in that area, whichever is the greatest, provide?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.12	S8.5	Are a routine cleaning and maintenance programme implemented for drainage systems, sump pits, and oil interceptors?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.13	S8.5	Are sufficient general refuse disposal/collection points provided on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.14	S8.5	Is general refuse disposed of properly and regularly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.15	S8.5	Are appropriate measures adopted to minimize windblown litter and dust during transportation of waste?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.16	S8.5	Are individual collectors for aluminum cans, plastic bottles and packaging material and office paper provided to encourage waste segregation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.17	S8.5	Are C&D wastes sorted on site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.18	S8.5	Are C&D waste disposed of properly?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.19	S8.5	Are unused C&D materials or chemicals recycled or reused to reduce the quantity of waste?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
4.20	S8.5	Are public fill and C&D waste reuse on site as far as practicable to avoid disposal off-site?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
4.21	S8.5	Are the construction materials stored properly to minimize the potential for damage or contamination?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4.22	S8.5	Is a dumping license obtained to deliver public fill to public filling areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.00		Landscape and Visual				
5.01	S11.10 & 11.11	Are Is site hoarding provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.02	S11.10 & 11.11	Are vegetation disturbance minimized or soil protected to reduce potential soil erosion?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.03	S11.10 & 11.11	Is construction light oriented away from the sensitive receivers?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.04	S11.10 & 11.11	Is grass hydroseeding provided to slopes as soon as the completion of works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.05	S11.10 & 11.11	Are damages to trees outside site boundary due construction works avoided?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reminder
5.06	S11.10 & 11.11	Is excavation works carried out manually instead of machinery operation within 2.5m vicinity of any preserved trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5.07	S11.10 & 11.11	Are the retained and transplanted tree(s) properly protected and in good conditions?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
5.08	S11.10 & 11.11	Are surgery works carried out for damaged trees?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.00		Ecology				
6.01	S9.7	Is site runoff properly treated to prevent any silty runoff?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.02	S9.7	Are silt trap installed and well-maintained?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.03	S9.7	Are stockpiles properly covered to avoid generating silty runoff?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.04	S9.7	Are construction works restricted to works area which are clearly defined?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.05	S9.7	For slope mitigation works within the Clear Water Bay Country Park, are tree felling and damages to trees, the exact locations of the flexible barrier foundation plates, soil nails and rock dowels adjusted during detailed design, and a setback distance from existing trees is recommended to be maintained as far as practical?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.06	S9.7	Are pruning of tree canopies along the alignment of the flexible barriers limited to a minimum?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.07	S9.7	Are the alignment of flexible barriers optimized to preserve all species of conservation interest and minimize the impact to the existing vegetation as far as practicable? Are the alignment of flexible barriers positioned at minimum 1.5 m in a radius away from these individuals?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
6.08	S9.7	At the detailed design stage prior to the commencement of the slope mitigation works, is vegetation survey carried out at the slope mitigation areas within the Clear Water Bay	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
		Country Park to assess the condition and identify the location of each individual of <i>Marsdenia lachnostoma</i> and other flora species of conservation interest that may be directly affected by the construction works?				
6.09	S9.7	Is temporary fencing installed to fence off the concerned species either in groups of individually within the works area and in the close proximity to prevent from being damaged and disturbed during construction? Is a sign identifying the site attached to the fence and flagging tape shall be attached to the individuals to visualize their locations?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.10	S9.7	Is a specification for fencing and demarcating individuals of <i>Marsdenia lachnostoma</i> (or other flora species of conservation interest, if found) adjacent to the proposed alignment of the flexible barriers prepared to protect the species?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.11	S9.7	Is any induction training provided to all site personnel in order to brief them on this flora of conservation interest including the locations and their importance?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.12	S9.7	Is the resident site supervisory staff closely monitor the conditions of concerned individuals during construction of flexible barriers in the close proximity?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.13	S9.7	Are fences erected along the boundary of the works area before the commencement of works to prevent vehicle movements and encroachment of personnel onto adjacent areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.14	S9.7	Is regular check of the work site boundaries performed to ensure that they are not breached and that damage does not occur to surrounding areas?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Is any damage and disturbance avoided, particularly those caused by filling and illegal dumping, to the surrounding habitats through proper management of waste disposal?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.16	S9.7	Are temporarily affected areas reinstated, particularly the habitats of plantation and shrubland-grassland immediately after completion of construction works, through on-site tree/shrub planting?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
6.15	S9.7	Are affected habitats within the Clear Water Bay Country Bay reinstated by hydro-seeding and planting of climbers and native shrub seedlings where practical upon completion of the slope mitigation works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.00		Landfill Gas Hazard				
7.01	S12.7	Are the safety procedures implemented to minimise the risks of fires and explosions, asphyxiation of works and toxicity effects during all works?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.02	S12.7	Are the gas detection equipment and precautions being used during trenching and excavation as well as creation of confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.03	S12.7	Are the training with regard to the awareness of potential hazards of working in confined spaces provided from the Contractor to the workers?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.04	S12.7	Are the safety officers trained with regard to landfill gas and leachate related hazards and presented on the site throughout the works undertaken below grade?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.05	S12.7	Are the all personnel working on site and all visitor made aware of the possibility of ignition of gas, the possible presence of contaminated water and the need to avoid physical contact?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Item No.	EIA ref.		N/A	Yes	No	Photo/Remarks
7.06	S12.7	Is the monitoring of landfill gas being undertaken in all excavations, manholes, chambers and any confined spaces?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
7.07	S12.7	Are the monitoring frequency and areas being specified by the safety officers or appropriately qualified person? Are the all measurements being recorded and documented?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.08	S12.7	Is the drilling proceeded with adequate care and precautions against the potential hazards?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.09	S12.7	Is the method statement covering all normal and emergency procedures provided by the drilling contractor prior to the commencement of the site works?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.10	S12.7	Are the below ground services entries being sealed to prevent gas entry? Are the grided metal covers being used for below grade cable trenches?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.11	S12.7	Is each manhole or utility pit monitored with two measurements (at mid-depth and base) for minimum of 10 minutes? Is the steady reading and peak reading recorded at each manhole or utility pit?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
7.12	S12.7	Are the warning signs of the hazards of landfill gas and its possible presence on site posted in prominent places?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8.00		Overall				
8.01		Is the EM&A properly implemented in general?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	



Contract no. 13/WSD/17 Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Remark / Follow up of Observation(s) and Non-compliance(s) of Last Weekly Site Inspection:

Reminder

- 1.) Tree protection along the open channel
The contractors are reminded to check the condition of Tree (T1020)
- 2.) The contractors are reminded to cover the soil bank around the sump pit near the open channel

Signatures:

ET Representative

(Name: *ALVIN CHUNG HU*)

Contractor's Representative

(Name: *Tiffany Tsang*)

Supervising Officer's Representative

(Name: *Rosemond*)

IEC's Representative

(Name: *Louis Kwan*)

WSD's Representative

(Name: *Yip Chi Kwan*)

Appendix J

Complaint Log

Statistical Summary of Environmental Complaints

Reporting Period	Environmental Complaint Statistics		
	Frequency	Cumulative	Complaint Nature
1 – 30 June 2022	0	0	N/A

Statistical Summary of Environmental Summons

Reporting Period	Environmental Summons Statistics		
	Frequency	Cumulative	Details
1 – 30 June 2022	0	0	N/A

Statistical Summary of Environmental Prosecution

Reporting Period	Environmental Prosecution Statistics		
	Frequency	Cumulative	Details
1 – 30 June 2022	0	0	N/A

Appendix K

Impact Monitoring Schedule of Next Reporting Month

Contract No. 13/WSD/17
Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant

Tentative Water Quality Monitoring Schedule						
Jul-22						
Sun	Mon	Tue	Wed	Thu	Fri	Sat
					1	2
						Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 10:00-18:08 Flood Tide: 03:00-10:00 Monitoring Time: Mid-ebb: 12:30-16:00(Cancelled) Mid-flood: 08:00-09:45 (Cancelled)
3	4	5	6	7	8	9
		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 12:00-20:00 Flood Tide: 06:00-12:00 Monitoring Time: Mid-ebb: 14:00-18:00 Mid-flood: 08:00-11:00		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 14:00-21:00 Flood Tide: 08:00-14:00 Monitoring Time: Mid-ebb: 15:00-19:00 Mid-flood: 09:00-12:30		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 05:00-11:00 Flood Tide: 11:00-18:06 Monitoring Time: Mid-ebb: 08:00-10:42 Mid-flood: 12:48-16:18
10	11	12	13	14	15	16
		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 06:56-14:39 Flood Tide: 14:39-23:32 Monitoring Time: Mid-ebb: 09:02-12:32 Mid-flood: 15:00-18:30		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 08:49-16:21 Flood Tide: 16:21-23:32 Monitoring Time: Mid-ebb: 10:50-14:20 Mid-flood: 16:42-19:00		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 10:48-17:51 Flood Tide: 03:40-10:48 Monitoring Time: Mid-ebb: 12:34-16:04 Mid-flood: 08:00-10:26
17	18	19	20	21	22	23
		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 13:29-19:40 Flood Tide: 06:24-13:29 Monitoring Time: Mid-ebb: 14:49-18:19 Mid-flood: 08:11-11:41		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 15:43-20:42 Flood Tide: 09:00-15:43 Monitoring Time: Mid-ebb: 15:57-19:00 Mid-flood: 10:36-14:06		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 12:35-19:00 Flood Tide: 05:40-12:38 Monitoring Time: Mid-ebb: 14:02-17:32 Mid-flood: 08:00-10:52
24	25	26	27	28	29	30
		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 07:21-15:00 Flood Tide: 15:00-22:00 Monitoring Time: Mid-ebb: 09:25-12:25 Mid-flood: 15:21-18:51		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 08:22-16:00 Flood Tide: 16:00-22:58 Monitoring Time: Mid-ebb: 10:26-13:56 Mid-flood: 16:20-19:00		Impact Water Quality monitoring for CE, CF, WSR1, WSR2, WSR3, WSR4, WSR16, WSR33, WSR36, WSR37 Tidal Period: Ebb Tide: 09:40-17:05 Flood Tide: 03:00-09:40 Monitoring Time: Mid-ebb: 11:37-15:07 Mid-flood: 08:00-09:30
31						
<p>Remarks: 1. Monitoring Parameters: Dissolved oxygen, Temperature, pH, Turbidity, Salinity, Suspended Solids</p> <p>Note: - Due to safety concern of vessel transportation earlier than 0700, Water Quality Monitoring would start at 0800. - Prioritized routing: Mid-Ebb: CE→WSR16→WSR37→WSR36→WSR33→Remaining stations and Mid-Flood: CF→WSR1→WSR2→WSR3→WSR4→Remaining stations - Due to adverse weather (No. 8 Typhoon warning signal) on 2 July 2022, water quality monitoring on 2 July 2022 was cancelled.</p>						

Appendix L

Water Quality and Landfill Gas Monitoring Data

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CE	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	10:40	9.04	8.16	31.99	26.36	3.81	2.5
CE	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	10:40	9	8.13	31.82	26.39	3.75	4
CE	20220602	Cloudy	Moderate	Mid-Flood	Middle	12	10:39	8.94	8.16	31.85	26.33	3.96	4
CE	20220602	Cloudy	Moderate	Mid-Flood	Middle	12	10:39	9.17	8.13	31.99	26.38	3.97	5
CE	20220602	Cloudy	Moderate	Mid-Flood	Bottom	23	10:38	9.16	8.15	32.01	26.3	4.06	5
CE	20220602	Cloudy	Moderate	Mid-Flood	Bottom	23	10:38	8.99	8.16	31.83	26.42	4.12	4
CF	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	9.73	8.17	32.46	26.3	4.1	5
CF	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	9.45	8.15	32.39	26.26	4.21	4
CF	20220602	Cloudy	Moderate	Mid-Flood	Middle	10	8:01	9.54	8.15	32.43	26.27	4.71	4
CF	20220602	Cloudy	Moderate	Mid-Flood	Middle	10	8:01	9.69	8.16	32.26	26.15	4.55	4
CF	20220602	Cloudy	Moderate	Mid-Flood	Bottom	19	8:00	9.46	8.2	32.26	26.31	4.88	4
CF	20220602	Cloudy	Moderate	Mid-Flood	Bottom	19	8:00	9.45	8.15	32.38	26.26	4.76	5
WSR01	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:26	8.71	8.17	31.45	26.15	3.4	8
WSR01	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:26	8.83	8.2	31.49	26.1	3.23	5
WSR01	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.35	8:25	8.72	8.18	31.48	26.19	3.52	2.5
WSR01	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.35	8:25	8.6	8.18	31.54	26.08	3.36	4
WSR01	20220602	Cloudy	Moderate	Mid-Flood	Bottom	7.7	8:24	8.6	8.19	31.49	26.19	2.7	6
WSR01	20220602	Cloudy	Moderate	Mid-Flood	Bottom	7.7	8:24	8.81	8.15	31.48	26.02	2.64	4
WSR02	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:45	8.86	8.32	31.49	25.84	2.12	3
WSR02	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:45	9.06	8.27	31.47	25.75	1.89	2.5
WSR02	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.6	8:44	8.96	8.3	31.47	25.78	2.13	3
WSR02	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.6	8:44	8.94	8.32	31.56	25.81	2.09	3
WSR02	20220602	Cloudy	Moderate	Mid-Flood	Bottom	8.2	8:43	8.84	8.29	31.53	25.86	2.3	2.5
WSR02	20220602	Cloudy	Moderate	Mid-Flood	Bottom	8.2	8:43	8.9	8.28	31.48	25.8	2.26	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:59	9.67	8.16	31.74	26.17	3.37	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	8:59	9.7	8.14	31.58	26.02	3.47	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR03	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.15	8:58	9.67	8.11	31.55	26.1	2.62	3
WSR03	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.15	8:58	9.52	8.15	31.63	26.16	2.52	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Flood	Bottom	7.3	8:57	9.59	8.17	31.49	26.08	2.41	3
WSR03	20220602	Cloudy	Moderate	Mid-Flood	Bottom	7.3	8:57	9.52	8.11	31.61	26.1	2.21	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:13	9.21	8.17	31.73	25.78	3.89	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:13	9.05	8.12	31.95	25.68	3.38	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Flood	Middle	3.75	9:12	9.1	8.11	31.79	25.62	3.55	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Flood	Middle	3.75	9:12	9.26	8.17	31.75	25.72	3.34	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Flood	Bottom	6.5	9:11	9.05	8.18	31.67	25.7	2.92	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Flood	Bottom	6.5	9:11	9.25	8.15	31.93	25.7	3.35	3
WSR16	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	10:18	8.92	8.14	32.05	25.88	2.76	2.5
WSR16	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	10:18	9.14	8.13	31.95	25.78	3.03	2.5
WSR16	20220602	Cloudy	Moderate	Mid-Flood	Middle	8.55	10:17	9.01	8.15	32.1	25.86	2.58	2.5
WSR16	20220602	Cloudy	Moderate	Mid-Flood	Middle	8.55	10:17	9.07	8.14	31.87	25.82	2.77	3
WSR16	20220602	Cloudy	Moderate	Mid-Flood	Bottom	16.1	10:16	9.04	8.14	31.9	25.74	2.23	2.5
WSR16	20220602	Cloudy	Moderate	Mid-Flood	Bottom	16.1	10:16	9.06	8.14	32	25.76	2.64	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:27	9.51	8.21	31.79	26.39	3.21	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:27	9.55	8.2	31.73	26.32	3.29	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Flood	Middle	3.85	9:26	9.56	8.22	31.8	26.21	3.47	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Flood	Middle	3.85	9:26	9.45	8.21	31.87	26.34	3.71	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Flood	Bottom	6.7	9:25	9.61	8.23	31.82	26.35	2.98	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Flood	Bottom	6.7	9:25	9.4	8.21	31.79	26.36	2.85	4
WSR36	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:40	8.91	8.22	32.28	26.04	3.69	3
WSR36	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:40	9.12	8.24	32.27	26.13	4	2.5
WSR36	20220602	Cloudy	Moderate	Mid-Flood	Middle	3.55	9:40	8.87	8.23	32.35	26.08	3.62	2.5
WSR36	20220602	Cloudy	Moderate	Mid-Flood	Middle	3.55	9:40	8.93	8.31	32.35	26.04	3.87	3
WSR36	20220602	Cloudy	Moderate	Mid-Flood	Bottom	6.1	9:39	9.04	8.26	32.35	26.25	2.89	2.5
WSR36	20220602	Cloudy	Moderate	Mid-Flood	Bottom	6.1	9:39	9	8.31	32.47	26.17	3.1	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR37	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:56	9.38	8.12	31.51	25.86	3.27	2.5
WSR37	20220602	Cloudy	Moderate	Mid-Flood	Surface	1	9:56	9.41	8.19	31.58	25.96	3.38	2.5
WSR37	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.2	9:55	9.22	8.16	31.54	25.8	2.39	2.5
WSR37	20220602	Cloudy	Moderate	Mid-Flood	Middle	4.2	9:55	9.41	8.15	31.6	25.92	2.51	2.5
WSR37	20220602	Cloudy	Moderate	Mid-Flood	Bottom	7.4	9:54	9.32	8.13	31.67	25.91	2.18	2.5
WSR37	20220602	Cloudy	Moderate	Mid-Flood	Bottom	7.4	9:54	9.29	8.16	31.67	25.88	2.42	4
CE	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	10:41	9.22	8.16	31.24	25.68	4.24	2.5
CE	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	10:41	9.22	8.22	31.32	25.79	4.13	2.5
CE	20220604	Cloudy	Moderate	Mid-Flood	Middle	12.35	10:40	9.43	8.17	31.38	25.8	4.56	2.5
CE	20220604	Cloudy	Moderate	Mid-Flood	Middle	12.35	10:40	9.12	8.23	31.33	25.81	4.58	2.5
CE	20220604	Cloudy	Moderate	Mid-Flood	Bottom	23.7	10:39	9.3	8.21	31.38	25.66	4.8	2.5
CE	20220604	Cloudy	Moderate	Mid-Flood	Bottom	23.7	10:39	9.07	8.18	31.2	25.79	5	2.5
CF	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	9.22	8.16	31.39	25.25	4.8	2.5
CF	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	9.15	8.15	31.53	25.4	4.72	2.5
CF	20220604	Cloudy	Moderate	Mid-Flood	Middle	10.05	8:01	9.43	8.16	31.56	25.16	5.14	2.5
CF	20220604	Cloudy	Moderate	Mid-Flood	Middle	10.05	8:01	9.47	8.17	31.58	25.38	4.93	2.5
CF	20220604	Cloudy	Moderate	Mid-Flood	Bottom	19.1	8:00	9.16	8.16	31.41	25.18	5.29	2.5
CF	20220604	Cloudy	Moderate	Mid-Flood	Bottom	19.1	8:00	9.26	8.16	31.6	25.33	5.34	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:26	8.84	8.16	31.2	25.39	4.55	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:26	8.83	8.21	31.25	25.3	4.03	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.6	8:25	8.87	8.2	31.14	25.33	3.97	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.6	8:25	9.03	8.15	31.3	25.31	4.03	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Flood	Bottom	8.2	8:24	8.7	8.2	31.22	25.44	4	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Flood	Bottom	8.2	8:24	8.75	8.15	31.43	25.51	3.48	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:44	9.09	8.22	32.18	25.44	4.31	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:44	9.25	8.26	32.09	25.35	4	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.85	8:43	9.26	8.23	31.98	25.31	3.38	3
WSR02	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.85	8:43	9.14	8.16	31.93	25.44	3.52	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR02	20220604	Cloudy	Moderate	Mid-Flood	Bottom	8.7	8:42	8.83	8.16	31.98	25.38	3.6	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Flood	Bottom	8.7	8:42	9.11	8.15	31.96	25.42	3.79	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:58	9.38	8.16	31.44	25.31	3.62	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	8:58	9.24	8.15	31.45	25.2	3.75	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.2	8:57	9.16	8.15	31.24	25.21	3.04	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.2	8:57	9.03	8.13	31.33	25.26	3.47	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Flood	Bottom	7.4	8:56	9.58	8.15	31.49	25.26	2.82	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Flood	Bottom	7.4	8:56	9.19	8.17	31.43	25.35	3.23	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:12	8.76	8.22	31.68	25.23	4.79	3
WSR04	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:12	8.62	8.25	31.88	25.24	4.75	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Flood	Middle	3.7	9:11	8.74	8.26	31.77	25.42	4.06	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Flood	Middle	3.7	9:11	8.58	8.29	31.71	25.39	4.42	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Flood	Bottom	6.4	9:10	9	8.31	31.9	25.34	4.28	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Flood	Bottom	6.4	9:10	8.75	8.29	31.76	25.22	4.21	2.5
WSR16	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	10:18	9.09	8.18	31.22	25.68	3.68	2.5
WSR16	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	10:18	9.65	8.17	31.42	25.78	3.38	3
WSR16	20220604	Cloudy	Moderate	Mid-Flood	Middle	7.85	10:17	9.42	8.17	31.18	25.79	3.46	2.5
WSR16	20220604	Cloudy	Moderate	Mid-Flood	Middle	7.85	10:17	9.6	8.16	31.28	25.68	3.61	2.5
WSR16	20220604	Cloudy	Moderate	Mid-Flood	Bottom	14.7	10:16	9.27	8.18	31.2	25.75	3.59	3
WSR16	20220604	Cloudy	Moderate	Mid-Flood	Bottom	14.7	10:16	9.43	8.12	31.25	25.64	3.18	3
WSR33	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:27	9.61	8.14	31.28	25.37	3.07	3
WSR33	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:27	9.11	8.18	31.26	25.14	3.67	3
WSR33	20220604	Cloudy	Moderate	Mid-Flood	Middle	3.7	9:26	9.35	8.12	31.27	25.26	3.25	2.5
WSR33	20220604	Cloudy	Moderate	Mid-Flood	Middle	3.7	9:26	9.14	8.19	31.16	25.21	3.57	2.5
WSR33	20220604	Cloudy	Moderate	Mid-Flood	Bottom	6.4	9:25	9.14	8.13	31.24	25.22	2.87	2.5
WSR33	20220604	Cloudy	Moderate	Mid-Flood	Bottom	6.4	9:25	9.57	8.13	31.29	25.17	3.08	3
WSR36	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:40	8.67	8.23	31.28	25.29	3.57	2.5
WSR36	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:40	9.21	8.3	31.37	25.18	3.15	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR36	20220604	Cloudy	Moderate	Mid-Flood	Middle	3.6	9:40	8.56	8.27	31.28	25.2	3.41	3
WSR36	20220604	Cloudy	Moderate	Mid-Flood	Middle	3.6	9:40	9.15	8.26	31.41	25.14	2.97	2.5
WSR36	20220604	Cloudy	Moderate	Mid-Flood	Bottom	6.2	9:39	8.75	8.19	31.35	25.24	2.7	2.5
WSR36	20220604	Cloudy	Moderate	Mid-Flood	Bottom	6.2	9:39	8.77	8.22	31.25	25.32	3.14	3
WSR37	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:56	8.64	8.29	31.75	25.65	3.97	4
WSR37	20220604	Cloudy	Moderate	Mid-Flood	Surface	1	9:56	8.63	8.25	31.71	25.63	3.89	4
WSR37	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.1	9:55	8.93	8.31	31.8	25.73	3.35	2.5
WSR37	20220604	Cloudy	Moderate	Mid-Flood	Middle	4.1	9:55	9	8.27	31.64	25.7	3.41	2.5
WSR37	20220604	Cloudy	Moderate	Mid-Flood	Bottom	7.2	9:54	8.95	8.31	31.56	25.72	3.91	2.5
WSR37	20220604	Cloudy	Moderate	Mid-Flood	Bottom	7.2	9:54	8.72	8.25	31.78	25.66	3.82	2.5
CE	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	11:40	8.98	8.17	30.94	26.68	3.17	4
CE	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	11:40	9.01	8.19	30.91	26.48	2.99	3
CE	20220607	Cloudy	Moderate	Mid-Flood	Middle	10.25	11:39	8.93	8.19	30.83	26.59	3.44	3
CE	20220607	Cloudy	Moderate	Mid-Flood	Middle	10.25	11:39	8.9	8.18	30.81	26.47	3.33	4
CE	20220607	Cloudy	Moderate	Mid-Flood	Bottom	19.5	11:38	9.02	8.17	30.76	26.53	3.6	4
CE	20220607	Cloudy	Moderate	Mid-Flood	Bottom	19.5	11:38	9.02	8.18	30.76	26.48	3.79	3
CF	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:00	9.16	8.17	31.2	26.51	3.69	5
CF	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:00	9.33	8.16	31.33	26.47	3.55	3
CF	20220607	Cloudy	Moderate	Mid-Flood	Middle	10.6	8:59	9.21	8.18	31.35	26.59	4.06	3
CF	20220607	Cloudy	Moderate	Mid-Flood	Middle	10.6	8:59	9.3	8.2	31.27	26.47	3.99	3
CF	20220607	Cloudy	Moderate	Mid-Flood	Bottom	20.2	8:58	9.13	8.19	31.33	26.48	4.53	3
CF	20220607	Cloudy	Moderate	Mid-Flood	Bottom	20.2	8:58	9.22	8.2	31.33	26.72	4.24	4
WSR01	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:24	9.02	8.32	30.9	26.68	3.93	4
WSR01	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:24	8.88	8.29	30.81	26.66	3.96	3
WSR01	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.3	9:23	9	8.33	30.91	26.45	2.97	3
WSR01	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.3	9:23	8.87	8.32	30.89	26.53	3.49	3
WSR01	20220607	Cloudy	Moderate	Mid-Flood	Bottom	7.6	9:22	9.05	8.36	30.91	26.6	2.87	4
WSR01	20220607	Cloudy	Moderate	Mid-Flood	Bottom	7.6	9:22	9	8.27	30.76	26.68	2.84	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR02	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:43	8.92	8.3	31.61	26.91	2.45	4
WSR02	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:43	9	8.33	31.42	26.89	2.31	3
WSR02	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.9	9:42	9.02	8.32	31.69	26.98	2.66	3
WSR02	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.9	9:42	8.92	8.35	31.5	26.89	2.36	5
WSR02	20220607	Cloudy	Moderate	Mid-Flood	Bottom	8.8	9:41	9.11	8.29	31.41	26.94	2.68	9
WSR02	20220607	Cloudy	Moderate	Mid-Flood	Bottom	8.8	9:41	9.09	8.36	31.59	26.84	2.54	8
WSR03	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:57	8.27	8.24	31.49	26.61	3.56	3
WSR03	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	9:57	8.31	8.21	31.45	26.66	3.32	4
WSR03	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.15	9:56	8.23	8.28	31.28	26.65	2.63	5
WSR03	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.15	9:56	8.38	8.25	31.28	26.55	3.12	5
WSR03	20220607	Cloudy	Moderate	Mid-Flood	Bottom	7.3	9:55	8.23	8.2	31.31	26.61	2.94	4
WSR03	20220607	Cloudy	Moderate	Mid-Flood	Bottom	7.3	9:55	8.3	8.2	31.37	26.57	2.95	3
WSR04	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:11	8.56	8.33	31.43	26.73	3.06	8
WSR04	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:11	8.54	8.25	31.55	26.97	3.33	9
WSR04	20220607	Cloudy	Moderate	Mid-Flood	Middle	3.85	10:10	8.67	8.35	31.51	26.93	3.46	5
WSR04	20220607	Cloudy	Moderate	Mid-Flood	Middle	3.85	10:10	8.49	8.24	31.57	26.74	3.13	5
WSR04	20220607	Cloudy	Moderate	Mid-Flood	Bottom	6.7	10:09	8.58	8.32	31.47	26.92	3.04	5
WSR04	20220607	Cloudy	Moderate	Mid-Flood	Bottom	6.7	10:09	8.61	8.32	31.65	26.86	3.23	8
WSR16	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	11:17	9.13	8.35	30.74	26.91	3.31	4
WSR16	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	11:17	9.04	8.33	30.73	26.95	2.98	3
WSR16	20220607	Cloudy	Moderate	Mid-Flood	Middle	7.6	11:16	9.1	8.33	30.51	26.93	2.79	4
WSR16	20220607	Cloudy	Moderate	Mid-Flood	Middle	7.6	11:16	9.13	8.35	30.68	26.97	2.84	4
WSR16	20220607	Cloudy	Moderate	Mid-Flood	Bottom	14.2	11:15	9.11	8.26	30.66	26.88	2.47	4
WSR16	20220607	Cloudy	Moderate	Mid-Flood	Bottom	14.2	11:15	8.96	8.34	30.56	26.99	2.83	4
WSR33	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:26	8.95	8.3	30.82	26.39	3.5	5
WSR33	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:26	8.76	8.27	30.84	26.46	3.57	4
WSR33	20220607	Cloudy	Moderate	Mid-Flood	Middle	3.6	10:25	8.88	8.31	30.8	26.28	3.29	6
WSR33	20220607	Cloudy	Moderate	Mid-Flood	Middle	3.6	10:25	8.82	8.33	30.89	26.34	3.25	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR33	20220607	Cloudy	Moderate	Mid-Flood	Bottom	6.2	10:24	8.9	8.28	30.99	26.49	2.97	5
WSR33	20220607	Cloudy	Moderate	Mid-Flood	Bottom	6.2	10:24	8.94	8.24	31.07	26.4	3.15	5
WSR36	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:40	8.44	8.19	30.86	26.84	4.01	4
WSR36	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:40	8.39	8.16	30.77	26.89	3.54	4
WSR36	20220607	Cloudy	Moderate	Mid-Flood	Middle	3.25	10:40	8.39	8.2	30.85	26.88	3.33	5
WSR36	20220607	Cloudy	Moderate	Mid-Flood	Middle	3.25	10:40	8.38	8.2	30.98	26.91	3.25	4
WSR36	20220607	Cloudy	Moderate	Mid-Flood	Bottom	5.5	10:39	8.38	8.18	30.98	26.8	3.43	5
WSR36	20220607	Cloudy	Moderate	Mid-Flood	Bottom	5.5	10:39	8.29	8.16	30.81	26.84	3.54	5
WSR37	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:55	8.34	8.17	31	27.04	3.29	6
WSR37	20220607	Cloudy	Moderate	Mid-Flood	Surface	1	10:55	8.33	8.22	31.23	26.86	3.56	6
WSR37	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.2	10:54	8.41	8.21	31.2	27.04	2.75	5
WSR37	20220607	Cloudy	Moderate	Mid-Flood	Middle	4.2	10:54	8.37	8.22	31.11	26.84	3.03	4
WSR37	20220607	Cloudy	Moderate	Mid-Flood	Bottom	7.4	10:53	8.51	8.18	30.99	27	3.11	3
WSR37	20220607	Cloudy	Moderate	Mid-Flood	Bottom	7.4	10:53	8.47	8.17	31.18	26.92	3.01	4
CE	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	17:14	9.22	8.25	32.66	26.89	3.03	3
CE	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	17:14	9.15	8.18	32.79	26.76	3.14	3
CE	20220611	Cloudy	Moderate	Mid-Flood	Middle	12.1	17:13	9.09	8.18	32.71	26.81	3.19	2.5
CE	20220611	Cloudy	Moderate	Mid-Flood	Middle	12.1	17:13	9.32	8.2	32.71	26.78	3.26	3
CE	20220611	Cloudy	Moderate	Mid-Flood	Bottom	23.2	17:12	9.27	8.2	32.68	26.78	3.2	3
CE	20220611	Cloudy	Moderate	Mid-Flood	Bottom	23.2	17:12	9.24	8.23	32.73	26.96	3.04	4
CF	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	14:30	9.06	8.23	32.34	26.45	3.57	3
CF	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	14:30	9.24	8.22	32.54	26.28	3.69	3
CF	20220611	Cloudy	Moderate	Mid-Flood	Middle	10.85	14:29	9.2	8.21	32.25	26.26	3.76	3
CF	20220611	Cloudy	Moderate	Mid-Flood	Middle	10.85	14:29	9.01	8.28	32.47	26.24	3.62	4
CF	20220611	Cloudy	Moderate	Mid-Flood	Bottom	20.7	14:28	9.07	8.21	32.28	26.25	3.78	4
CF	20220611	Cloudy	Moderate	Mid-Flood	Bottom	20.7	14:28	9.22	8.24	32.44	26.29	3.99	4
WSR01	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	14:53	8.77	8.15	32.94	26.93	2.83	3
WSR01	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	14:53	8.8	8.22	32.91	26.75	2.68	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR01	20220611	Cloudy	Moderate	Mid-Flood	Middle	4.25	14:52	8.66	8.17	33.01	26.95	2.14	3
WSR01	20220611	Cloudy	Moderate	Mid-Flood	Middle	4.25	14:52	8.74	8.23	32.9	26.85	2.19	3
WSR01	20220611	Cloudy	Moderate	Mid-Flood	Bottom	7.5	14:51	8.9	8.18	32.97	26.94	2.22	2.5
WSR01	20220611	Cloudy	Moderate	Mid-Flood	Bottom	7.5	14:51	8.68	8.2	32.88	26.92	2.26	3
WSR02	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:11	9.14	8.19	32.57	26.77	2.12	3
WSR02	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:11	9.12	8.21	32.71	26.71	2.26	3
WSR02	20220611	Cloudy	Moderate	Mid-Flood	Middle	4.9	15:10	8.98	8.21	32.87	26.93	2.14	4
WSR02	20220611	Cloudy	Moderate	Mid-Flood	Middle	4.9	15:10	8.95	8.2	32.78	26.76	2.01	4
WSR02	20220611	Cloudy	Moderate	Mid-Flood	Bottom	8.8	15:09	9.18	8.22	32.65	26.73	2.24	3
WSR02	20220611	Cloudy	Moderate	Mid-Flood	Bottom	8.8	15:09	9.02	8.24	32.71	26.68	2.11	4
WSR03	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:24	8.74	8.29	32.19	26.51	2.36	4
WSR03	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:24	8.76	8.31	32.27	26.3	2.61	3
WSR03	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.95	15:23	8.6	8.34	32.25	26.44	1.99	4
WSR03	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.95	15:23	8.71	8.3	32.36	26.51	2.21	4
WSR03	20220611	Cloudy	Moderate	Mid-Flood	Bottom	6.9	15:22	8.6	8.31	32.4	26.34	2.16	3
WSR03	20220611	Cloudy	Moderate	Mid-Flood	Bottom	6.9	15:22	8.77	8.33	32.23	26.53	2.21	4
WSR04	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:39	8.31	8.29	32.51	26.28	3.11	6
WSR04	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:39	8.5	8.3	32.44	26.12	3.3	5
WSR04	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.65	15:38	8.4	8.27	32.27	26.39	2.93	4
WSR04	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.65	15:38	8.46	8.25	32.49	26.26	2.69	4
WSR04	20220611	Cloudy	Moderate	Mid-Flood	Bottom	6.3	15:37	8.43	8.27	32.36	26.19	2.2	3
WSR04	20220611	Cloudy	Moderate	Mid-Flood	Bottom	6.3	15:37	8.47	8.3	32.55	26.26	2.5	4
WSR16	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	16:49	9.15	8.37	32.2	26.55	3.11	4
WSR16	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	16:49	8.99	8.34	32.32	26.65	3.15	5
WSR16	20220611	Cloudy	Moderate	Mid-Flood	Middle	8.6	16:48	9.11	8.32	32.35	26.56	2.07	5
WSR16	20220611	Cloudy	Moderate	Mid-Flood	Middle	8.6	16:48	9.14	8.32	32.11	26.7	2.38	3
WSR16	20220611	Cloudy	Moderate	Mid-Flood	Bottom	16.2	16:47	9.07	8.32	32.24	26.64	2.44	5
WSR16	20220611	Cloudy	Moderate	Mid-Flood	Bottom	16.2	16:47	9.08	8.33	32.22	26.63	2.24	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR33	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:55	8.86	8.36	32.44	26.49	2.18	4
WSR33	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	15:55	8.86	8.33	32.49	26.41	2.26	5
WSR33	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.8	15:54	8.92	8.34	32.34	26.53	2.08	5
WSR33	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.8	15:54	8.91	8.37	32.53	26.36	2.05	5
WSR33	20220611	Cloudy	Moderate	Mid-Flood	Bottom	6.6	15:53	8.78	8.37	32.28	26.54	2.19	4
WSR33	20220611	Cloudy	Moderate	Mid-Flood	Bottom	6.6	15:53	8.66	8.36	32.53	26.28	2.24	4
WSR36	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	16:10	9.44	8.28	32.38	26.43	2.56	4
WSR36	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	16:10	9.43	8.34	32.5	26.39	2.99	2.5
WSR36	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.25	16:10	9.39	8.3	32.54	26.54	2.39	4
WSR36	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.25	16:10	9.4	8.34	32.42	26.31	2.25	5
WSR36	20220611	Cloudy	Moderate	Mid-Flood	Bottom	5.5	16:09	9.48	8.3	32.49	26.44	2.43	4
WSR36	20220611	Cloudy	Moderate	Mid-Flood	Bottom	5.5	16:09	9.24	8.3	32.37	26.54	2.24	4
WSR37	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	16:26	8.51	8.32	32.91	26.67	2.65	6
WSR37	20220611	Cloudy	Moderate	Mid-Flood	Surface	1	16:26	8.48	8.35	32.74	26.58	2.78	4
WSR37	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.3	16:26	8.9	8.33	33.01	26.56	2.65	5
WSR37	20220611	Cloudy	Moderate	Mid-Flood	Middle	3.3	16:26	8.88	8.34	32.95	26.55	2.66	4
WSR37	20220611	Cloudy	Moderate	Mid-Flood	Bottom	7.6	16:25	8.59	8.37	33.02	26.57	2.37	4
WSR37	20220611	Cloudy	Moderate	Mid-Flood	Bottom	7.6	16:25	8.61	8.35	32.99	26.55	2.25	5
CE	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	17:43	9.35	8.39	31.57	27.09	2.64	3
CE	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	17:43	9.41	8.33	31.58	27.26	2.7	5
CE	20220613	Cloudy	Moderate	Mid-Flood	Middle	10.25	17:42	9.26	8.29	31.31	27.03	2.87	6
CE	20220613	Cloudy	Moderate	Mid-Flood	Middle	10.25	17:42	9.48	8.37	31.31	27.04	2.7	3
CE	20220613	Cloudy	Moderate	Mid-Flood	Bottom	19.5	17:41	9.37	8.36	31.24	27.17	2.94	3
CE	20220613	Cloudy	Moderate	Mid-Flood	Bottom	19.5	17:41	9.3	8.31	31.36	27.24	3.04	5
CF	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:01	8.56	8.21	31.95	27.13	3.25	10
CF	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:01	8.55	8.25	31.88	27.29	3.05	8
CF	20220613	Cloudy	Moderate	Mid-Flood	Middle	10.1	15:00	8.41	8.25	32.1	27.14	3.15	3
CF	20220613	Cloudy	Moderate	Mid-Flood	Middle	10.1	15:00	8.42	8.24	32.2	27.28	3.24	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CF	20220613	Cloudy	Moderate	Mid-Flood	Bottom	19.2	14:59	8.53	8.22	31.84	27.3	3.71	5
CF	20220613	Cloudy	Moderate	Mid-Flood	Bottom	19.2	14:59	8.39	8.21	32.09	27.12	3.55	7
WSR01	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:24	8.81	8.26	31.16	26.75	2.41	3
WSR01	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:24	8.85	8.22	31.05	26.8	2.6	4
WSR01	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.3	15:23	8.86	8.2	31.38	26.75	2.59	3
WSR01	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.3	15:23	8.79	8.21	31.38	26.72	2.3	6
WSR01	20220613	Cloudy	Moderate	Mid-Flood	Bottom	7.6	15:22	8.78	8.22	31.23	26.95	2.24	4
WSR01	20220613	Cloudy	Moderate	Mid-Flood	Bottom	7.6	15:22	8.98	8.2	31.31	26.95	2.19	7
WSR02	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:42	8.75	8.36	31.26	27.28	2.74	7
WSR02	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:42	8.66	8.3	31.24	27.34	2.35	6
WSR02	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.8	15:41	8.49	8.38	31.28	27.38	2.59	5
WSR02	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.8	15:41	8.54	8.29	30.99	27.22	2.31	5
WSR02	20220613	Cloudy	Moderate	Mid-Flood	Bottom	8.6	15:40	8.68	8.3	31.2	27.23	2.41	4
WSR02	20220613	Cloudy	Moderate	Mid-Flood	Bottom	8.6	15:40	8.59	8.38	30.99	27.47	2.09	4
WSR03	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:57	8.57	8.21	32.11	26.86	2.39	3
WSR03	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	15:57	8.61	8.23	32.2	26.92	2.11	4
WSR03	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.25	15:56	8.67	8.26	32.12	26.88	2.06	4
WSR03	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.25	15:56	8.62	8.24	32.03	26.87	2.14	3
WSR03	20220613	Cloudy	Moderate	Mid-Flood	Bottom	7.5	15:55	8.73	8.26	32.19	26.97	2.24	3
WSR03	20220613	Cloudy	Moderate	Mid-Flood	Bottom	7.5	15:55	8.7	8.24	32.03	27.08	2.23	4
WSR04	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:11	8.69	8.33	31.58	27.32	2.37	2.5
WSR04	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:11	8.74	8.33	31.74	27.51	2.25	4
WSR04	20220613	Cloudy	Moderate	Mid-Flood	Middle	3.4	16:10	8.49	8.3	31.77	27.31	2.36	5
WSR04	20220613	Cloudy	Moderate	Mid-Flood	Middle	3.4	16:10	8.57	8.39	31.74	27.43	2.61	6
WSR04	20220613	Cloudy	Moderate	Mid-Flood	Bottom	5.8	16:09	8.73	8.34	31.86	27.31	2.27	6
WSR04	20220613	Cloudy	Moderate	Mid-Flood	Bottom	5.8	16:09	8.67	8.37	31.84	27.55	2.33	4
WSR16	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	17:20	9.05	8.32	31.91	27.11	2.73	2.5
WSR16	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	17:20	9.08	8.33	31.86	27.13	3.02	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR16	20220613	Cloudy	Moderate	Mid-Flood	Middle	8.1	17:19	8.91	8.29	32.02	27.11	2.51	6
WSR16	20220613	Cloudy	Moderate	Mid-Flood	Middle	8.1	17:19	9.13	8.32	32.04	27.22	2.35	8
WSR16	20220613	Cloudy	Moderate	Mid-Flood	Bottom	15.2	17:18	9.01	8.24	31.82	27.19	2.2	7
WSR16	20220613	Cloudy	Moderate	Mid-Flood	Bottom	15.2	17:18	8.96	8.28	31.97	27.25	2.61	8
WSR33	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:26	9.26	8.34	31.4	27.2	2.11	7
WSR33	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:26	9.1	8.27	31.1	27.28	1.99	8
WSR33	20220613	Cloudy	Moderate	Mid-Flood	Middle	3.5	16:25	9.1	8.31	31.19	27.18	2.28	6
WSR33	20220613	Cloudy	Moderate	Mid-Flood	Middle	3.5	16:25	9.13	8.3	31.28	27.2	2.09	4
WSR33	20220613	Cloudy	Moderate	Mid-Flood	Bottom	6	16:24	9.08	8.37	31.2	27.04	2.39	35
WSR33	20220613	Cloudy	Moderate	Mid-Flood	Bottom	6	16:24	9.11	8.26	31.5	27.3	2.04	34
WSR36	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:40	8.67	8.33	31.78	26.75	2.3	8
WSR36	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:40	8.51	8.28	31.67	26.94	2.39	5
WSR36	20220613	Cloudy	Moderate	Mid-Flood	Middle	3.5	16:40	8.57	8.34	31.66	26.72	2.15	24
WSR36	20220613	Cloudy	Moderate	Mid-Flood	Middle	3.5	16:40	8.73	8.3	32.01	26.87	2.45	25
WSR36	20220613	Cloudy	Moderate	Mid-Flood	Bottom	6	16:39	8.63	8.32	31.97	26.91	2.24	3
WSR36	20220613	Cloudy	Moderate	Mid-Flood	Bottom	6	16:39	8.76	8.26	31.74	26.92	2.54	5
WSR37	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:57	9.05	8.25	31.9	27.43	2.63	4
WSR37	20220613	Cloudy	Moderate	Mid-Flood	Surface	1	16:57	8.9	8.23	31.69	27.44	2.21	6
WSR37	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.05	16:56	8.95	8.24	31.81	27.58	2.09	4
WSR37	20220613	Cloudy	Moderate	Mid-Flood	Middle	4.05	16:56	9.02	8.21	32.01	27.5	2.46	4
WSR37	20220613	Cloudy	Moderate	Mid-Flood	Bottom	7.1	16:55	9.02	8.28	31.99	27.49	2.16	4
WSR37	20220613	Cloudy	Moderate	Mid-Flood	Bottom	7.1	16:55	8.86	8.22	31.71	27.42	2.21	3
CE	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	19:25	8.96	8.18	32.2	27.3	2.91	2.5
CE	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	19:25	9.01	8.17	32.25	27.33	3.32	2.5
CE	20220615	Cloudy	Moderate	Mid-Flood	Middle	10.15	19:24	8.95	8.26	32.03	27.33	3.12	2.5
CE	20220615	Cloudy	Moderate	Mid-Flood	Middle	10.15	19:24	9.03	8.21	32.1	27.37	3	3
CE	20220615	Cloudy	Moderate	Mid-Flood	Bottom	19.3	19:23	9.04	8.17	32.3	27.31	3.27	3
CE	20220615	Cloudy	Moderate	Mid-Flood	Bottom	19.3	19:23	9.02	8.26	32.22	27.32	3.29	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CF	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	16:46	8.12	8.21	31.69	27.55	3.45	4
CF	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	16:46	8.15	8.25	31.8	27.47	3.29	3
CF	20220615	Cloudy	Moderate	Mid-Flood	Middle	9.8	16:45	8.07	8.15	31.79	27.55	3.78	3
CF	20220615	Cloudy	Moderate	Mid-Flood	Middle	9.8	16:45	8.07	8.21	31.67	27.46	3.65	2.5
CF	20220615	Cloudy	Moderate	Mid-Flood	Bottom	18.6	16:44	8.08	8.14	31.86	27.46	3.87	2.5
CF	20220615	Cloudy	Moderate	Mid-Flood	Bottom	18.6	16:44	8.13	8.22	31.94	27.59	4.07	2.5
WSR01	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:10	8.24	8.24	31.78	27.41	3.37	2.5
WSR01	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:10	8.18	8.18	31.59	27.37	3	3
WSR01	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.45	17:09	8.14	8.16	31.73	27.4	3.16	2.5
WSR01	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.45	17:09	8.11	8.18	31.5	27.39	3.39	2.5
WSR01	20220615	Cloudy	Moderate	Mid-Flood	Bottom	7.9	17:08	8.14	8.14	31.43	27.36	2.72	3
WSR01	20220615	Cloudy	Moderate	Mid-Flood	Bottom	7.9	17:08	8.11	8.2	31.6	27.43	2.46	2.5
WSR02	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:28	8.82	8.19	31.85	26.91	2.3	2.5
WSR02	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:28	8.84	8.19	31.87	27.01	2.16	2.5
WSR02	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.9	17:27	8.78	8.13	32.01	27.03	2.33	3
WSR02	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.9	17:27	8.77	8.14	31.76	27.04	2.18	2.5
WSR02	20220615	Cloudy	Moderate	Mid-Flood	Bottom	8.8	17:26	8.8	8.2	32.08	27.04	2.77	2.5
WSR02	20220615	Cloudy	Moderate	Mid-Flood	Bottom	8.8	17:26	8.72	8.2	31.83	26.98	2.65	3
WSR03	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:42	9.01	8.23	31.5	27.45	3.35	2.5
WSR03	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:42	9.15	8.21	31.5	27.42	3.11	3
WSR03	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.2	17:41	9.17	8.24	31.68	27.43	3.06	3
WSR03	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.2	17:41	9.06	8.18	31.38	27.43	2.75	2.5
WSR03	20220615	Cloudy	Moderate	Mid-Flood	Bottom	7.4	17:40	9.15	8.19	31.8	27.41	2.77	4
WSR03	20220615	Cloudy	Moderate	Mid-Flood	Bottom	7.4	17:40	9.04	8.15	31.67	27.55	2.87	3
WSR04	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:55	8.41	8.28	32.24	26.96	3.26	2.5
WSR04	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	17:55	8.49	8.29	31.88	27.01	2.75	2.5
WSR04	20220615	Cloudy	Moderate	Mid-Flood	Middle	3.35	17:54	8.51	8.24	32.26	27.06	2.52	2.5
WSR04	20220615	Cloudy	Moderate	Mid-Flood	Middle	3.35	17:54	8.4	8.18	32.07	26.96	2.48	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR04	20220615	Cloudy	Moderate	Mid-Flood	Bottom	5.7	17:53	8.52	8.25	32.18	27.05	2.27	2.5
WSR04	20220615	Cloudy	Moderate	Mid-Flood	Bottom	5.7	17:53	8.43	8.19	31.91	27.08	2.63	2.5
WSR16	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	19:02	9.01	8.39	31.9	27.01	2.96	3
WSR16	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	19:02	9.08	8.38	32.17	27.03	2.91	2.5
WSR16	20220615	Cloudy	Moderate	Mid-Flood	Middle	7.7	19:01	9.1	8.42	32.05	27.08	2.3	2.5
WSR16	20220615	Cloudy	Moderate	Mid-Flood	Middle	7.7	19:01	9.09	8.43	32.18	27.11	2.55	2.5
WSR16	20220615	Cloudy	Moderate	Mid-Flood	Bottom	14.4	19:00	9.04	8.36	31.92	27.04	2.54	2.5
WSR16	20220615	Cloudy	Moderate	Mid-Flood	Bottom	14.4	19:00	9.11	8.33	32.09	27.03	2.75	4
WSR33	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	18:09	8.54	8.39	31.63	27.28	2.92	3
WSR33	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	18:09	8.54	8.39	31.61	27.25	3.46	3
WSR33	20220615	Cloudy	Moderate	Mid-Flood	Middle	3.75	18:08	8.54	8.42	31.67	27.35	2.94	4
WSR33	20220615	Cloudy	Moderate	Mid-Flood	Middle	3.75	18:08	8.39	8.37	31.82	27.33	3.13	3
WSR33	20220615	Cloudy	Moderate	Mid-Flood	Bottom	6.5	18:07	8.39	8.43	31.8	27.29	2.8	3
WSR33	20220615	Cloudy	Moderate	Mid-Flood	Bottom	6.5	18:07	8.4	8.36	31.88	27.28	2.97	3
WSR36	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	18:23	8.39	8.26	32.37	27.47	2.66	2.5
WSR36	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	18:23	8.35	8.28	32.58	27.48	2.63	3
WSR36	20220615	Cloudy	Moderate	Mid-Flood	Middle	3.7	18:23	8.4	8.28	32.35	27.48	2.93	3
WSR36	20220615	Cloudy	Moderate	Mid-Flood	Middle	3.7	18:23	8.32	8.29	32.74	27.4	2.54	4
WSR36	20220615	Cloudy	Moderate	Mid-Flood	Bottom	6.4	18:22	8.4	8.32	32.49	27.51	2.62	3
WSR36	20220615	Cloudy	Moderate	Mid-Flood	Bottom	6.4	18:22	8.29	8.26	32.38	27.5	2.62	3
WSR37	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	18:38	8.39	8.08	31.82	27.11	2.96	4
WSR37	20220615	Cloudy	Moderate	Mid-Flood	Surface	1	18:38	8.38	8.13	32.03	27.16	2.74	3
WSR37	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.25	18:37	8.54	8.09	32.1	27.11	2.43	4
WSR37	20220615	Cloudy	Moderate	Mid-Flood	Middle	4.25	18:37	8.51	8.17	31.84	27.18	2.9	3
WSR37	20220615	Cloudy	Moderate	Mid-Flood	Bottom	7.5	18:36	8.48	8.13	32.11	27.11	2.76	3
WSR37	20220615	Cloudy	Moderate	Mid-Flood	Bottom	7.5	18:36	8.51	8.1	32.11	27.16	2.49	2.5
CE	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	10:41	9.75	8.26	30.82	26.59	3.13	2.5
CE	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	10:41	9.67	8.24	30.44	26.71	3.2	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CE	20220616	Cloudy	Moderate	Mid-Flood	Middle	10.1	10:40	9.63	8.2	30.64	26.7	3.38	3
CE	20220616	Cloudy	Moderate	Mid-Flood	Middle	10.1	10:40	9.62	8.26	30.45	26.67	3.22	3
CE	20220616	Cloudy	Moderate	Mid-Flood	Bottom	19.2	10:39	9.35	8.19	30.57	26.61	3.62	3
CE	20220616	Cloudy	Moderate	Mid-Flood	Bottom	19.2	10:39	9.67	8.24	30.15	26.62	3.57	3
CF	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	9.52	8.23	30.37	26.12	3.33	2.5
CF	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	9.41	8.24	30.3	26.24	3.28	4
CF	20220616	Cloudy	Moderate	Mid-Flood	Middle	10.65	8:01	9.3	8.28	30	26.14	3.79	3
CF	20220616	Cloudy	Moderate	Mid-Flood	Middle	10.65	8:01	9.42	8.24	30.52	26.1	3.68	3
CF	20220616	Cloudy	Moderate	Mid-Flood	Bottom	20.3	8:00	9.41	8.25	30.47	26.24	4.04	2.5
CF	20220616	Cloudy	Moderate	Mid-Flood	Bottom	20.3	8:00	9.46	8.24	30.06	26.09	3.83	3
WSR01	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:25	9.63	8.22	30.1	26.07	2.89	4
WSR01	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:25	9.66	8.21	30.23	26.03	2.54	4
WSR01	20220616	Cloudy	Moderate	Mid-Flood	Middle	4.7	8:24	9.48	8.29	30.43	26.17	2.58	4
WSR01	20220616	Cloudy	Moderate	Mid-Flood	Middle	4.7	8:24	9.6	8.23	30.7	25.96	2.49	4
WSR01	20220616	Cloudy	Moderate	Mid-Flood	Bottom	8.4	8:23	9.51	8.27	30.83	25.96	2.26	6
WSR01	20220616	Cloudy	Moderate	Mid-Flood	Bottom	8.4	8:23	9.56	8.21	30.57	26.1	2.62	7
WSR02	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:43	9.63	8.25	30.51	26.84	1.92	2.5
WSR02	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:43	9.47	8.26	30.89	26.66	2.15	3
WSR02	20220616	Cloudy	Moderate	Mid-Flood	Middle	4.85	8:42	9.52	8.25	30.95	26.7	2.27	3
WSR02	20220616	Cloudy	Moderate	Mid-Flood	Middle	4.85	8:42	9.59	8.26	30.43	26.74	2.19	4
WSR02	20220616	Cloudy	Moderate	Mid-Flood	Bottom	8.7	8:41	9.51	8.22	30.77	26.66	2.35	3
WSR02	20220616	Cloudy	Moderate	Mid-Flood	Bottom	8.7	8:41	9.44	8.22	30.94	26.65	2.25	4
WSR03	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:57	9.63	8.32	29.43	26.22	2.81	4
WSR03	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	8:57	9.6	8.24	29.71	26.31	3.21	5
WSR03	20220616	Cloudy	Moderate	Mid-Flood	Middle	4	8:56	9.7	8.24	29.76	26.33	2.8	3
WSR03	20220616	Cloudy	Moderate	Mid-Flood	Middle	4	8:56	9.68	8.28	29.9	26.29	2.56	3
WSR03	20220616	Cloudy	Moderate	Mid-Flood	Bottom	7	8:55	9.76	8.33	29.71	26.29	2.76	3
WSR03	20220616	Cloudy	Moderate	Mid-Flood	Bottom	7	8:55	9.6	8.32	30.08	26.23	2.33	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR04	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:11	9.89	8.27	30.02	26.5	2.68	3
WSR04	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:11	9.88	8.3	30.58	26.38	3.04	4
WSR04	20220616	Cloudy	Moderate	Mid-Flood	Middle	3.65	9:10	10.01	8.3	30.16	26.44	2.54	3
WSR04	20220616	Cloudy	Moderate	Mid-Flood	Middle	3.65	9:10	9.99	8.32	30.44	26.54	2.34	5
WSR04	20220616	Cloudy	Moderate	Mid-Flood	Bottom	6.3	9:09	9.89	8.29	30.77	26.57	2.73	3
WSR04	20220616	Cloudy	Moderate	Mid-Flood	Bottom	6.3	9:09	9.88	8.32	30.25	26.56	2.29	3
WSR16	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	10:18	9.63	8.22	30.69	26.6	2.67	4
WSR16	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	10:18	9.66	8.2	31.16	26.49	2.56	5
WSR16	20220616	Cloudy	Moderate	Mid-Flood	Middle	8.65	10:17	9.8	8.19	30.98	26.57	2.31	4
WSR16	20220616	Cloudy	Moderate	Mid-Flood	Middle	8.65	10:17	9.78	8.21	31.14	26.5	2.43	4
WSR16	20220616	Cloudy	Moderate	Mid-Flood	Bottom	16.3	10:16	9.84	8.38	30.91	26.63	2.24	3
WSR16	20220616	Cloudy	Moderate	Mid-Flood	Bottom	16.3	10:16	9.71	8.21	30.63	26.45	2.42	3
WSR33	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:26	9.64	8.33	30.7	26.08	2.46	5
WSR33	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:26	9.65	8.28	30.6	26.13	2.6	6
WSR33	20220616	Cloudy	Moderate	Mid-Flood	Middle	3.75	9:25	9.61	8.36	30.45	26.23	2.46	4
WSR33	20220616	Cloudy	Moderate	Mid-Flood	Middle	3.75	9:25	9.7	8.3	30.28	26.06	2.28	5
WSR33	20220616	Cloudy	Moderate	Mid-Flood	Bottom	6.5	9:24	9.83	8.37	30.42	26.16	2.28	4
WSR33	20220616	Cloudy	Moderate	Mid-Flood	Bottom	6.5	9:24	9.73	8.37	30.86	26.22	2.31	4
WSR36	20220616	Cloudy	Moderate	Mid-Flood	Middle	3.25	9:39	9.68	8.24	29.9	26.89	2.56	5
WSR36	20220616	Cloudy	Moderate	Mid-Flood	Middle	3.25	9:39	9.62	8.23	30.24	26.84	2.47	5
WSR36	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:39	9.72	8.33	29.96	26.74	2.37	4
WSR36	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:39	9.76	8.3	30.09	26.83	2.28	3
WSR36	20220616	Cloudy	Moderate	Mid-Flood	Bottom	5.5	9:38	9.64	8.25	29.86	26.73	2.23	5
WSR36	20220616	Cloudy	Moderate	Mid-Flood	Bottom	5.5	9:38	9.75	8.24	30.54	26.78	2.18	3
WSR37	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:54	9.8	8.18	30.64	26.54	2.39	5
WSR37	20220616	Cloudy	Moderate	Mid-Flood	Surface	1	9:54	9.73	8.33	30.37	26.43	2.19	5
WSR37	20220616	Cloudy	Moderate	Mid-Flood	Middle	4	9:53	9.87	8.24	30.69	26.48	2.6	5
WSR37	20220616	Cloudy	Moderate	Mid-Flood	Middle	4	9:53	9.88	8.24	30.47	26.53	2.64	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR37	20220616	Cloudy	Moderate	Mid-Flood	Bottom	7	9:52	9.79	8.19	30.43	26.57	2.19	5
WSR37	20220616	Cloudy	Moderate	Mid-Flood	Bottom	7	9:52	9.9	8.23	30.74	26.58	2.41	5
CE	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	11:02	8.63	8.31	30.61	27.1	5.65	3
CE	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	11:02	8.78	8.34	30.67	27.06	5.21	5
CE	20220620	Cloudy	Moderate	Mid-Flood	Middle	10.75	11:01	8.91	8.33	30.68	27.11	5.77	3
CE	20220620	Cloudy	Moderate	Mid-Flood	Middle	10.75	11:01	8.89	8.3	30.73	27.17	5.64	3
CE	20220620	Cloudy	Moderate	Mid-Flood	Bottom	20.5	11:00	8.88	8.32	30.47	27.23	5.92	5
CE	20220620	Cloudy	Moderate	Mid-Flood	Bottom	20.5	11:00	8.91	8.35	30.78	27.16	6.15	4
CF	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	8:24	8.99	8.21	29.64	27.49	5.82	5
CF	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	8:24	8.8	8.24	29.96	27.49	6.19	4
CF	20220620	Cloudy	Moderate	Mid-Flood	Middle	10.4	8:23	8.78	8.19	29.85	27.33	6.36	5
CF	20220620	Cloudy	Moderate	Mid-Flood	Middle	10.4	8:23	8.54	8.2	29.96	27.5	6.29	3
CF	20220620	Cloudy	Moderate	Mid-Flood	Bottom	19.8	8:22	8.81	8.2	29.64	27.35	6.63	4
CF	20220620	Cloudy	Moderate	Mid-Flood	Bottom	19.8	8:22	8.84	8.27	29.69	27.45	6.52	4
WSR01	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	8:47	9.05	8.24	30.07	27.44	5.25	5
WSR01	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	8:47	9.34	8.24	30.3	27.38	5.29	5
WSR01	20220620	Cloudy	Moderate	Mid-Flood	Middle	4.7	8:46	8.96	8.28	29.96	27.34	4.95	4
WSR01	20220620	Cloudy	Moderate	Mid-Flood	Middle	4.7	8:46	9.52	8.23	30.02	27.33	4.55	4
WSR01	20220620	Cloudy	Moderate	Mid-Flood	Bottom	8.4	8:45	9.38	8.25	30.01	27.32	4.59	3
WSR01	20220620	Cloudy	Moderate	Mid-Flood	Bottom	8.4	8:45	9.34	8.24	30.19	27.54	4.2	4
WSR02	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:06	9.47	8.27	30.2	27.24	2.53	5
WSR02	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:06	9.75	8.3	30.4	27.37	2.33	4
WSR02	20220620	Cloudy	Moderate	Mid-Flood	Middle	4.75	9:05	9.6	8.29	30.27	27.5	2.68	4
WSR02	20220620	Cloudy	Moderate	Mid-Flood	Middle	4.75	9:05	9.4	8.31	30.32	27.25	2.87	3
WSR02	20220620	Cloudy	Moderate	Mid-Flood	Bottom	8.5	9:04	9.49	8.29	30.33	27.29	3.31	5
WSR02	20220620	Cloudy	Moderate	Mid-Flood	Bottom	8.5	9:04	9.56	8.27	30.22	27.5	3.22	5
WSR03	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:20	8.87	8.4	30.38	26.93	5.5	4
WSR03	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:20	9.08	8.37	30.6	26.9	5.6	5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR03	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.75	9:19	8.83	8.34	30.35	26.93	5.28	5
WSR03	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.75	9:19	8.72	8.38	30.26	26.75	5.38	5
WSR03	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.5	9:18	9.05	8.38	30.47	26.81	5.15	3
WSR03	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.5	9:18	8.74	8.35	30.34	26.85	5.21	5
WSR04	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:33	8.91	8.26	30.64	27.1	5.38	5
WSR04	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:33	8.88	8.27	30.71	27.05	4.99	5
WSR04	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.65	9:32	8.76	8.2	30.64	26.93	5.2	5
WSR04	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.65	9:32	8.9	8.24	31.01	27.17	4.81	3
WSR04	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.3	9:31	8.92	8.19	30.98	27.08	5.19	5
WSR04	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.3	9:31	8.72	8.24	30.76	27.02	4.46	4
WSR16	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	10:38	9.34	8.23	30.52	27.12	5.21	5
WSR16	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	10:38	9.32	8.22	30.67	27.06	5.77	4
WSR16	20220620	Cloudy	Moderate	Mid-Flood	Middle	8.55	10:37	9.14	8.26	30.54	27.16	4.99	4
WSR16	20220620	Cloudy	Moderate	Mid-Flood	Middle	8.55	10:37	9.07	8.22	30.59	27.15	5.29	5
WSR16	20220620	Cloudy	Moderate	Mid-Flood	Bottom	16.1	10:36	8.86	8.22	30.4	27.12	5.24	4
WSR16	20220620	Cloudy	Moderate	Mid-Flood	Bottom	16.1	10:36	9.35	8.23	30.78	27.01	4.66	5
WSR33	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:47	9.71	8.34	29.78	27.44	4.82	3
WSR33	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	9:47	9.46	8.35	29.94	27.49	5.23	3
WSR33	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.55	9:46	9.35	8.4	30.01	27.53	4.19	2.5
WSR33	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.55	9:46	9.68	8.34	29.76	27.42	4.62	3
WSR33	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.1	9:45	9.61	8.38	29.88	27.32	3.93	3
WSR33	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.1	9:45	9.65	8.37	30.03	27.47	3.77	5
WSR36	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	10:01	8.55	8.25	30.28	26.9	4.77	3
WSR36	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	10:01	8.92	8.25	30.38	26.73	4.62	3
WSR36	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.55	10:01	8.88	8.26	30.23	26.72	4.62	3
WSR36	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.55	10:01	8.71	8.22	30.48	26.85	4.32	4
WSR36	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.1	10:00	8.96	8.23	30.47	26.83	4.64	4
WSR36	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.1	10:00	9.08	8.22	30.42	26.77	4.07	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR37	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	10:17	9.5	8.22	30.59	27.14	4.78	4
WSR37	20220620	Cloudy	Moderate	Mid-Flood	Surface	1	10:17	9.19	8.24	30.73	27.24	5.09	4
WSR37	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.8	10:16	9.5	8.26	30.72	27.23	4.69	3
WSR37	20220620	Cloudy	Moderate	Mid-Flood	Middle	3.8	10:16	9.54	8.23	30.88	27.32	4.66	4
WSR37	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.6	10:15	9.16	8.25	30.64	27.1	4.53	5
WSR37	20220620	Cloudy	Moderate	Mid-Flood	Bottom	6.6	10:15	9.57	8.24	30.86	27.19	4.13	3
CE	20220622	Sunny	Moderate	Mid-Flood	Surface	1	13:46	9.31	8.26	30.95	27.43	4.28	4
CE	20220622	Sunny	Moderate	Mid-Flood	Surface	1	13:46	9.38	8.23	31.11	27.43	4.48	4
CE	20220622	Sunny	Moderate	Mid-Flood	Middle	11.95	13:45	9.31	8.23	30.9	27.41	4.71	5
CE	20220622	Sunny	Moderate	Mid-Flood	Middle	11.95	13:45	9.16	8.2	31.26	27.45	4.63	5
CE	20220622	Sunny	Moderate	Mid-Flood	Bottom	22.9	13:44	9.2	8.22	31.03	27.39	5.16	4
CE	20220622	Sunny	Moderate	Mid-Flood	Bottom	22.9	13:44	9.26	8.24	31.19	27.34	4.86	4
CF	20220622	Sunny	Moderate	Mid-Flood	Surface	1	11:05	9.63	8.38	30.71	27.72	5.34	4
CF	20220622	Sunny	Moderate	Mid-Flood	Surface	1	11:05	9.62	8.34	30.91	27.76	5.23	4
CF	20220622	Sunny	Moderate	Mid-Flood	Middle	9.85	11:04	9.65	8.36	30.77	27.8	5.63	5
CF	20220622	Sunny	Moderate	Mid-Flood	Middle	9.85	11:04	9.61	8.38	30.95	27.87	5.68	7
CF	20220622	Sunny	Moderate	Mid-Flood	Bottom	18.7	11:03	9.65	8.39	30.94	27.79	5.92	8
CF	20220622	Sunny	Moderate	Mid-Flood	Bottom	18.7	11:03	9.61	8.4	30.63	27.77	6.1	5
WSR01	20220622	Sunny	Moderate	Mid-Flood	Surface	1	11:28	9.89	8.16	30.77	27.87	4.73	5
WSR01	20220622	Sunny	Moderate	Mid-Flood	Surface	1	11:28	9.85	8.11	31.12	27.88	4.55	4
WSR01	20220622	Sunny	Moderate	Mid-Flood	Middle	4.65	11:27	9.95	8.1	31.02	27.84	4.03	3
WSR01	20220622	Sunny	Moderate	Mid-Flood	Middle	4.65	11:27	9.77	8.17	31.03	28.03	4.17	4
WSR01	20220622	Sunny	Moderate	Mid-Flood	Bottom	8.3	11:26	9.75	8.18	30.81	27.98	3.69	6
WSR01	20220622	Sunny	Moderate	Mid-Flood	Bottom	8.3	11:26	9.87	8.14	31.03	28.02	4.32	5
WSR02	20220622	Sunny	Moderate	Mid-Flood	Surface	1	11:47	9.35	8.2	31.82	27.92	2.74	5
WSR02	20220622	Sunny	Moderate	Mid-Flood	Surface	1	11:47	9.4	8.2	31.53	27.98	3	5
WSR02	20220622	Sunny	Moderate	Mid-Flood	Middle	4.75	11:46	9.52	8.25	31.78	27.96	2.84	5
WSR02	20220622	Sunny	Moderate	Mid-Flood	Middle	4.75	11:46	9.51	8.21	31.53	27.8	2.95	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR02	20220622	Sunny	Moderate	Mid-Flood	Bottom	8.5	11:45	9.39	8.22	31.8	27.84	3.18	4
WSR02	20220622	Sunny	Moderate	Mid-Flood	Bottom	8.5	11:45	9.42	8.18	31.72	27.94	3.23	4
WSR03	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:02	9.76	8.09	31.47	27.54	4.26	3
WSR03	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:02	9.89	8.08	31.37	27.71	4.21	3
WSR03	20220622	Sunny	Moderate	Mid-Flood	Middle	3.9	12:01	9.83	8.15	31.41	27.61	4.2	4
WSR03	20220622	Sunny	Moderate	Mid-Flood	Middle	3.9	12:01	9.75	8.1	31.53	27.71	4.07	3
WSR03	20220622	Sunny	Moderate	Mid-Flood	Bottom	6.8	12:00	9.97	8.14	31.26	27.7	3.66	4
WSR03	20220622	Sunny	Moderate	Mid-Flood	Bottom	6.8	12:00	9.95	8.12	31.22	27.54	4.04	3
WSR04	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:16	9.35	8.34	31.8	27.57	4.53	4
WSR04	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:16	9.3	8.35	31.97	27.66	4.15	3
WSR04	20220622	Sunny	Moderate	Mid-Flood	Middle	3.8	12:15	9.24	8.33	31.79	27.51	3.99	4
WSR04	20220622	Sunny	Moderate	Mid-Flood	Middle	3.8	12:15	9.4	8.31	31.99	27.61	3.73	4
WSR04	20220622	Sunny	Moderate	Mid-Flood	Bottom	6.6	12:14	9.38	8.33	31.65	27.62	3.42	4
WSR04	20220622	Sunny	Moderate	Mid-Flood	Bottom	6.6	12:14	9.37	8.33	31.94	27.56	4	4
WSR16	20220622	Sunny	Moderate	Mid-Flood	Surface	1	13:23	8.99	8.3	31.63	27.51	4.61	4
WSR16	20220622	Sunny	Moderate	Mid-Flood	Surface	1	13:23	9.02	8.37	31.74	27.47	4.67	3
WSR16	20220622	Sunny	Moderate	Mid-Flood	Middle	7.65	13:22	8.9	8.34	31.94	27.5	4.42	4
WSR16	20220622	Sunny	Moderate	Mid-Flood	Middle	7.65	13:22	9.07	8.34	31.78	27.63	4.4	4
WSR16	20220622	Sunny	Moderate	Mid-Flood	Bottom	14.3	13:21	9.01	8.37	31.91	27.6	4.04	4
WSR16	20220622	Sunny	Moderate	Mid-Flood	Bottom	14.3	13:21	9.07	8.34	31.79	27.62	3.86	4
WSR33	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:30	9.89	8.34	31.52	28.07	4.47	5
WSR33	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:30	10.01	8.29	31.52	27.91	4.06	5
WSR33	20220622	Sunny	Moderate	Mid-Flood	Middle	3.5	12:29	9.9	8.3	31.65	27.9	4.44	5
WSR33	20220622	Sunny	Moderate	Mid-Flood	Middle	3.5	12:29	10.06	8.29	31.55	27.91	4	5
WSR33	20220622	Sunny	Moderate	Mid-Flood	Bottom	6	12:28	9.85	8.31	31.46	27.99	3.95	5
WSR33	20220622	Sunny	Moderate	Mid-Flood	Bottom	6	12:28	9.85	8.35	31.7	27.99	3.44	4
WSR36	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:44	10.03	8.09	30.95	27.44	4.12	5
WSR36	20220622	Sunny	Moderate	Mid-Flood	Surface	1	12:44	9.95	8.09	30.86	27.34	4.27	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR36	20220622	Sunny	Moderate	Mid-Flood	Middle	3.5	12:44	9.87	8.07	30.91	27.43	3.84	5
WSR36	20220622	Sunny	Moderate	Mid-Flood	Middle	3.5	12:44	9.91	8.12	30.92	27.41	3.46	4
WSR36	20220622	Sunny	Moderate	Mid-Flood	Bottom	6	12:43	10.03	8.11	31.14	27.52	3.37	5
WSR36	20220622	Sunny	Moderate	Mid-Flood	Bottom	6	12:43	9.85	8.05	30.86	27.46	3.73	7
WSR37	20220622	Sunny	Moderate	Mid-Flood	Surface	1	13:00	9	8.32	31.17	27.7	4.1	6
WSR37	20220622	Sunny	Moderate	Mid-Flood	Surface	1	13:00	9.18	8.34	31.23	27.81	4.13	5
WSR37	20220622	Sunny	Moderate	Mid-Flood	Middle	4.05	12:59	9.2	8.35	31.24	27.65	3.56	5
WSR37	20220622	Sunny	Moderate	Mid-Flood	Middle	4.05	12:59	9.14	8.29	31.34	27.82	3.72	5
WSR37	20220622	Sunny	Moderate	Mid-Flood	Bottom	7.1	12:58	9.14	8.33	31.1	27.81	3.88	4
WSR37	20220622	Sunny	Moderate	Mid-Flood	Bottom	7.1	12:58	9.14	8.33	31.16	27.81	3.32	6
CE	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	16:34	9.43	8.19	31.51	26.87	4.71	3
CE	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	16:34	9.35	8.18	31.3	26.68	4.51	3
CE	20220624	Cloudy	Moderate	Mid-Flood	Middle	10.5	16:33	9.25	8.16	31.27	26.86	4.66	2.5
CE	20220624	Cloudy	Moderate	Mid-Flood	Middle	10.5	16:33	9.3	8.16	31.3	26.81	4.78	4
CE	20220624	Cloudy	Moderate	Mid-Flood	Bottom	20	16:32	9.42	8.16	31.11	26.79	4.97	3
CE	20220624	Cloudy	Moderate	Mid-Flood	Bottom	20	16:32	9.26	8.16	31.29	26.7	5.13	3
CF	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	13:53	8.47	8.24	30.5	26.61	5.23	4
CF	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	13:53	8.32	8.29	30.87	26.69	5.36	5
CF	20220624	Cloudy	Moderate	Mid-Flood	Middle	10.65	13:52	8.4	8.3	30.71	26.49	5.41	4
CF	20220624	Cloudy	Moderate	Mid-Flood	Middle	10.65	13:52	8.36	8.24	30.65	26.52	5.44	4
CF	20220624	Cloudy	Moderate	Mid-Flood	Bottom	20.3	13:51	8.31	8.28	30.85	26.63	5.65	3
CF	20220624	Cloudy	Moderate	Mid-Flood	Bottom	20.3	13:51	8.38	8.24	30.84	26.54	5.91	4
WSR01	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	14:16	9.12	8.23	30.63	27.04	4.89	5
WSR01	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	14:16	9.2	8.23	30.7	27.01	4.67	4
WSR01	20220624	Cloudy	Moderate	Mid-Flood	Middle	4.3	14:15	9.1	8.26	30.73	27.12	4.09	4
WSR01	20220624	Cloudy	Moderate	Mid-Flood	Middle	4.3	14:15	9.01	8.24	30.48	27.1	4.07	4
WSR01	20220624	Cloudy	Moderate	Mid-Flood	Bottom	7.6	14:14	9.09	8.27	30.79	27.03	4.32	4
WSR01	20220624	Cloudy	Moderate	Mid-Flood	Bottom	7.6	14:14	9.06	8.23	30.74	27.19	4.28	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR02	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	14:36	9.29	8.2	30.92	27.13	4.34	4
WSR02	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	14:36	9.37	8.24	30.83	27.02	3.97	4
WSR02	20220624	Cloudy	Moderate	Mid-Flood	Middle	4.55	14:35	9.2	8.17	30.79	27	3.53	3
WSR02	20220624	Cloudy	Moderate	Mid-Flood	Middle	4.55	14:35	9.22	8.22	30.98	27.13	3.57	3
WSR02	20220624	Cloudy	Moderate	Mid-Flood	Bottom	8.1	14:34	9.26	8.22	30.89	27.09	3.72	3
WSR02	20220624	Cloudy	Moderate	Mid-Flood	Bottom	8.1	14:34	9.36	8.2	30.66	27.02	3.73	2.5
WSR03	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	14:50	9.16	8.21	31.08	26.67	4.22	3
WSR03	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	14:50	9.25	8.24	31.16	26.73	4.54	3
WSR03	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.9	14:49	9.23	8.29	31.07	26.71	3.97	4
WSR03	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.9	14:49	9.1	8.3	31.28	26.59	4.64	4
WSR03	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.8	14:48	9.2	8.21	31.15	26.56	4.45	3
WSR03	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.8	14:48	9.23	8.25	31.08	26.6	4.53	3
WSR04	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:05	9.42	8.27	30.79	27.24	4.72	4
WSR04	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:05	9.29	8.25	30.58	27.24	4.72	4
WSR04	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.8	15:04	9.46	8.27	30.74	27.17	4.35	2.5
WSR04	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.8	15:04	9.52	8.23	30.79	27.23	4.95	4
WSR04	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.6	15:03	9.43	8.22	30.76	27.23	4.33	3
WSR04	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.6	15:03	9.31	8.25	30.71	27.22	3.96	2.5
WSR16	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	16:11	8.63	8.2	30.26	27.39	4.87	4
WSR16	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	16:11	8.61	8.19	30.67	27.36	4.53	2.5
WSR16	20220624	Cloudy	Moderate	Mid-Flood	Middle	8.15	16:10	8.61	8.16	30.5	27.39	4.11	3
WSR16	20220624	Cloudy	Moderate	Mid-Flood	Middle	8.15	16:10	8.76	8.19	30.59	27.24	3.84	3
WSR16	20220624	Cloudy	Moderate	Mid-Flood	Bottom	15.3	16:09	8.69	8.2	30.51	27.23	4.06	4
WSR16	20220624	Cloudy	Moderate	Mid-Flood	Bottom	15.3	16:09	8.61	8.2	30.29	27.33	4.23	3
WSR33	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:19	9.03	8.23	30.23	26.97	3.93	4
WSR33	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:19	8.99	8.19	30.48	26.89	4.25	3
WSR33	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.85	15:18	8.97	8.21	30.34	26.93	4.1	5
WSR33	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.85	15:18	8.94	8.24	30.12	26.93	3.78	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR33	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.7	15:17	9.03	8.17	30.45	26.92	3.43	4
WSR33	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.7	15:17	8.92	8.23	30.24	26.95	3.62	5
WSR36	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:33	9.19	8.1	31.15	27.05	4.35	5
WSR36	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:33	9.16	8.1	31.25	26.99	3.91	4
WSR36	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.8	15:33	9.24	8.15	31.3	27.07	3.99	4
WSR36	20220624	Cloudy	Moderate	Mid-Flood	Middle	3.8	15:33	9.34	8.1	31.14	27.1	4.03	3
WSR36	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.6	15:32	9.24	8.09	31.37	27.07	3.93	4
WSR36	20220624	Cloudy	Moderate	Mid-Flood	Bottom	6.6	15:32	9.24	8.14	31.54	27.03	3.9	4
WSR37	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:49	8.83	8.13	31.12	27.32	5.17	5
WSR37	20220624	Cloudy	Moderate	Mid-Flood	Surface	1	15:49	8.73	8.15	31.37	27.22	4.7	5
WSR37	20220624	Cloudy	Moderate	Mid-Flood	Middle	4.1	15:48	8.84	8.14	31.47	27.19	4.46	3
WSR37	20220624	Cloudy	Moderate	Mid-Flood	Middle	4.1	15:48	8.86	8.19	31.11	27.14	4.81	2.5
WSR37	20220624	Cloudy	Moderate	Mid-Flood	Bottom	7.2	15:47	8.88	8.17	31.18	27.2	4.59	2.5
WSR37	20220624	Cloudy	Moderate	Mid-Flood	Bottom	7.2	15:47	8.91	8.12	31.28	27.16	4.27	3
CE	20220628	Sunny	Moderate	Mid-Flood	Surface	1	18:45	8.9	8.22	31.12	28.27	3.6	4
CE	20220628	Sunny	Moderate	Mid-Flood	Surface	1	18:45	8.93	8.2	31.47	28.21	3.55	2.5
CE	20220628	Sunny	Moderate	Mid-Flood	Middle	10.2	18:44	8.83	8.2	31.14	28.22	3.88	4
CE	20220628	Sunny	Moderate	Mid-Flood	Middle	10.2	18:44	8.97	8.13	31.2	28.15	3.91	3
CE	20220628	Sunny	Moderate	Mid-Flood	Bottom	19.4	18:43	9.03	8.16	31.29	28.3	4.1	5
CE	20220628	Sunny	Moderate	Mid-Flood	Bottom	19.4	18:43	8.98	8.19	31.3	28.27	4.06	6
CF	20220628	Sunny	Moderate	Mid-Flood	Surface	1	15:54	9.15	8.37	31.11	27.77	3.84	5
CF	20220628	Sunny	Moderate	Mid-Flood	Surface	1	15:54	9.23	8.39	30.86	27.91	3.95	5
CF	20220628	Sunny	Moderate	Mid-Flood	Middle	10.15	15:53	9.25	8.33	31.27	27.95	4.16	3
CF	20220628	Sunny	Moderate	Mid-Flood	Middle	10.15	15:53	9.27	8.38	30.8	27.85	4.03	5
CF	20220628	Sunny	Moderate	Mid-Flood	Bottom	19.3	15:52	9.11	8.29	31.19	27.87	4.41	3
CF	20220628	Sunny	Moderate	Mid-Flood	Bottom	19.3	15:52	9.24	8.37	30.75	27.89	4.36	5
WSR01	20220628	Sunny	Moderate	Mid-Flood	Surface	1	16:18	8.91	8.26	31.77	28	3.36	4
WSR01	20220628	Sunny	Moderate	Mid-Flood	Surface	1	16:18	8.96	8.27	31.68	27.99	2.93	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR01	20220628	Sunny	Moderate	Mid-Flood	Middle	4.25	16:17	9.07	8.28	31.25	27.96	3.23	4
WSR01	20220628	Sunny	Moderate	Mid-Flood	Middle	4.25	16:17	9.1	8.27	31.37	27.91	3.2	5
WSR01	20220628	Sunny	Moderate	Mid-Flood	Bottom	7.5	16:16	9.08	8.31	31.59	27.96	2.49	5
WSR01	20220628	Sunny	Moderate	Mid-Flood	Bottom	7.5	16:16	9.02	8.29	31.54	27.85	2.69	3
WSR02	20220628	Sunny	Moderate	Mid-Flood	Surface	1	16:37	8.27	8.29	31.38	27.78	2.09	6
WSR02	20220628	Sunny	Moderate	Mid-Flood	Surface	1	16:37	8.44	8.25	30.94	27.76	2.02	4
WSR02	20220628	Sunny	Moderate	Mid-Flood	Middle	4.65	16:36	8.29	8.32	31.14	27.71	2.17	4
WSR02	20220628	Sunny	Moderate	Mid-Flood	Middle	4.65	16:36	8.37	8.31	31.14	27.84	2.06	4
WSR02	20220628	Sunny	Moderate	Mid-Flood	Bottom	8.3	16:35	8.36	8.3	31.4	27.78	2.48	3
WSR02	20220628	Sunny	Moderate	Mid-Flood	Bottom	8.3	16:35	8.3	8.25	31.06	27.71	2.53	5
WSR03	20220628	Sunny	Moderate	Mid-Flood	Surface	1	16:53	8.77	8.33	31.35	27.63	2.58	3
WSR03	20220628	Sunny	Moderate	Mid-Flood	Surface	1	16:53	8.69	8.35	31.18	27.7	2.92	4
WSR03	20220628	Sunny	Moderate	Mid-Flood	Middle	4.05	16:52	8.63	8.36	31.17	27.72	2.2	4
WSR03	20220628	Sunny	Moderate	Mid-Flood	Middle	4.05	16:52	8.61	8.35	31.22	27.77	2.51	4
WSR03	20220628	Sunny	Moderate	Mid-Flood	Bottom	7.1	16:51	8.77	8.32	30.99	27.6	1.93	3
WSR03	20220628	Sunny	Moderate	Mid-Flood	Bottom	7.1	16:51	8.65	8.29	31.43	27.61	2.15	4
WSR04	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:07	8.35	8.35	30.23	27.74	3.31	4
WSR04	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:07	8.31	8.39	30.47	27.68	3.18	4
WSR04	20220628	Sunny	Moderate	Mid-Flood	Middle	3.45	17:06	8.48	8.37	30.46	27.7	2.72	4
WSR04	20220628	Sunny	Moderate	Mid-Flood	Middle	3.45	17:06	8.31	8.34	30.47	27.67	2.61	4
WSR04	20220628	Sunny	Moderate	Mid-Flood	Bottom	5.9	17:05	8.49	8.37	30.35	27.58	2.46	4
WSR04	20220628	Sunny	Moderate	Mid-Flood	Bottom	5.9	17:05	8.36	8.39	30.63	27.61	2.54	5
WSR16	20220628	Sunny	Moderate	Mid-Flood	Surface	1	18:19	8.27	8.27	31.24	28.16	3.49	4
WSR16	20220628	Sunny	Moderate	Mid-Flood	Surface	1	18:19	8.11	8.22	31.05	28.24	3.28	4
WSR16	20220628	Sunny	Moderate	Mid-Flood	Middle	8.2	18:18	8.13	8.27	31.15	28.14	3.12	4
WSR16	20220628	Sunny	Moderate	Mid-Flood	Middle	8.2	18:18	8.15	8.32	30.89	28.23	3.17	4
WSR16	20220628	Sunny	Moderate	Mid-Flood	Bottom	15.4	18:17	8.19	8.27	31.33	28.24	2.85	4
WSR16	20220628	Sunny	Moderate	Mid-Flood	Bottom	15.4	18:17	8.18	8.25	31.05	28.3	2.5	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR33	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:24	9.21	8.37	30.7	27.88	2.97	5
WSR33	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:24	9.05	8.31	30.59	27.88	2.8	5
WSR33	20220628	Sunny	Moderate	Mid-Flood	Middle	3.55	17:23	9.16	8.33	30.64	28.05	2.99	3
WSR33	20220628	Sunny	Moderate	Mid-Flood	Middle	3.55	17:23	9.06	8.34	30.78	28.05	2.85	5
WSR33	20220628	Sunny	Moderate	Mid-Flood	Bottom	6.1	17:22	9.1	8.31	30.96	27.96	2.49	5
WSR33	20220628	Sunny	Moderate	Mid-Flood	Bottom	6.1	17:22	9.14	8.3	30.54	27.98	2.29	4
WSR36	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:38	8.5	8.27	30.53	27.85	3.1	5
WSR36	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:38	8.51	8.2	30.46	27.99	2.64	3
WSR36	20220628	Sunny	Moderate	Mid-Flood	Middle	3.65	17:38	8.52	8.22	30.7	27.93	2.71	4
WSR36	20220628	Sunny	Moderate	Mid-Flood	Middle	3.65	17:38	8.36	8.2	30.5	27.99	2.32	4
WSR36	20220628	Sunny	Moderate	Mid-Flood	Bottom	6.3	17:37	8.35	8.23	30.44	28.03	2.04	5
WSR36	20220628	Sunny	Moderate	Mid-Flood	Bottom	6.3	17:37	8.4	8.22	30.67	27.92	2.39	4
WSR37	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:56	8.86	8.18	31	27.9	3.33	5
WSR37	20220628	Sunny	Moderate	Mid-Flood	Surface	1	17:56	8.82	8.14	31.13	27.9	2.88	7
WSR37	20220628	Sunny	Moderate	Mid-Flood	Middle	4.1	17:55	8.96	8.15	30.68	27.81	3.34	5
WSR37	20220628	Sunny	Moderate	Mid-Flood	Middle	4.1	17:55	8.87	8.22	30.64	27.82	2.97	4
WSR37	20220628	Sunny	Moderate	Mid-Flood	Bottom	7.2	17:54	8.95	8.23	30.69	27.93	3.02	5
WSR37	20220628	Sunny	Moderate	Mid-Flood	Bottom	7.2	17:54	9.03	8.24	30.63	27.94	2.9	3
CE	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	10:31	8.32	8.26	31.06	28.42	3.4	2.5
CE	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	10:31	8.25	8.28	30.98	28.53	3.14	2.5
CE	20220630	Cloudy	Moderate	Mid-Flood	Middle	12	10:30	8.16	8.26	31.18	28.52	3.23	2.5
CE	20220630	Cloudy	Moderate	Mid-Flood	Middle	12	10:30	8.3	8.28	30.98	28.5	3.54	2.5
CE	20220630	Cloudy	Moderate	Mid-Flood	Bottom	23	10:29	8.29	8.22	31.11	28.53	3.63	3
CE	20220630	Cloudy	Moderate	Mid-Flood	Bottom	23	10:29	8.27	8.25	30.92	28.4	3.77	3
CF	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	8.5	8.29	30.32	28.03	3.91	4
CF	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:02	8.54	8.27	30.31	28.06	3.85	3
CF	20220630	Cloudy	Moderate	Mid-Flood	Middle	9.9	8:01	8.46	8.31	30.58	28.17	3.85	4
CF	20220630	Cloudy	Moderate	Mid-Flood	Middle	9.9	8:01	8.32	8.27	30.46	28.07	3.99	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CF	20220630	Cloudy	Moderate	Mid-Flood	Bottom	18.8	8:00	8.36	8.28	30.51	28.21	4.29	4
CF	20220630	Cloudy	Moderate	Mid-Flood	Bottom	18.8	8:00	8.37	8.28	30.56	28.09	4.11	4
WSR01	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:23	8.74	8.15	31.36	28.45	2.64	3
WSR01	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:23	8.76	8.13	31.19	28.23	2.74	2.5
WSR01	20220630	Cloudy	Moderate	Mid-Flood	Middle	4.25	8:22	8.68	8.1	31.24	28.44	2.25	2.5
WSR01	20220630	Cloudy	Moderate	Mid-Flood	Middle	4.25	8:22	8.73	8.1	31.38	28.41	2.2	3
WSR01	20220630	Cloudy	Moderate	Mid-Flood	Bottom	7.5	8:21	8.63	8.14	31.21	28.27	2.44	3
WSR01	20220630	Cloudy	Moderate	Mid-Flood	Bottom	7.5	8:21	8.74	8.15	31.33	28.4	2.75	3
WSR02	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:41	8.16	8.37	30.96	28.36	2.17	4
WSR02	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:41	8.25	8.37	30.82	28.52	2.01	2.5
WSR02	20220630	Cloudy	Moderate	Mid-Flood	Middle	4.5	8:40	8.3	8.34	30.99	28.37	2.19	3
WSR02	20220630	Cloudy	Moderate	Mid-Flood	Middle	4.5	8:40	8.31	8.35	30.95	28.53	1.95	2.5
WSR02	20220630	Cloudy	Moderate	Mid-Flood	Bottom	8	8:39	8.22	8.3	30.69	28.51	2.05	2.5
WSR02	20220630	Cloudy	Moderate	Mid-Flood	Bottom	8	8:39	8.36	8.3	30.68	28.46	2.39	3
WSR03	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:52	8.93	8.2	31.01	27.93	2.57	2.5
WSR03	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	8:52	8.78	8.2	30.96	28.02	2.2	2.5
WSR03	20220630	Cloudy	Moderate	Mid-Flood	Middle	4.2	8:51	8.91	8.24	31.19	28.03	2.21	3
WSR03	20220630	Cloudy	Moderate	Mid-Flood	Middle	4.2	8:51	8.86	8.19	31.22	27.91	1.9	4
WSR03	20220630	Cloudy	Moderate	Mid-Flood	Bottom	7.4	8:50	8.79	8.17	31.1	27.99	1.88	3
WSR03	20220630	Cloudy	Moderate	Mid-Flood	Bottom	7.4	8:50	8.81	8.2	30.97	27.93	1.94	3
WSR04	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:05	8.69	8.22	30.96	28.61	2.94	2.5
WSR04	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:05	8.77	8.2	31.13	28.54	2.87	3
WSR04	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.5	9:04	8.73	8.23	30.92	28.6	3.3	2.5
WSR04	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.5	9:04	8.71	8.22	30.85	28.66	3.13	3
WSR04	20220630	Cloudy	Moderate	Mid-Flood	Bottom	6	9:03	8.73	8.25	30.94	28.49	2.87	2.5
WSR04	20220630	Cloudy	Moderate	Mid-Flood	Bottom	6	9:03	8.69	8.23	31.12	28.64	3.03	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	10:09	8.9	8.28	31.07	28.26	2.44	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	10:09	8.88	8.27	31.12	28.23	2.53	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR16	20220630	Cloudy	Moderate	Mid-Flood	Middle	7.8	10:08	8.99	8.27	31.3	28.21	2.79	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Flood	Middle	7.8	10:08	9.01	8.24	31.24	28.14	2.51	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Flood	Bottom	14.6	10:07	8.97	8.26	31.13	28.22	1.87	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Flood	Bottom	14.6	10:07	9.02	8.25	31.32	28.12	1.97	3
WSR33	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:19	8.59	8.17	30.98	28.68	2.4	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:19	8.47	8.11	30.96	28.63	2.3	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.85	9:18	8.62	8.16	30.84	28.77	2.38	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.85	9:18	8.56	8.16	31.04	28.8	2.71	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Flood	Bottom	6.7	9:17	8.51	8.14	30.94	28.65	2.89	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Flood	Bottom	6.7	9:17	8.57	8.15	31.04	28.7	2.78	3
WSR36	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:32	8.48	8.26	31.52	27.96	2.43	3
WSR36	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:32	8.42	8.28	31.31	27.94	2.32	2.5
WSR36	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.2	9:32	8.53	8.28	31.49	27.86	2.58	2.5
WSR36	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.2	9:32	8.51	8.21	31.55	28.03	2.47	2.5
WSR36	20220630	Cloudy	Moderate	Mid-Flood	Bottom	5.4	9:31	8.56	8.27	31.46	27.96	2.42	2.5
WSR36	20220630	Cloudy	Moderate	Mid-Flood	Bottom	5.4	9:31	8.55	8.28	31.54	27.88	2.12	3
WSR37	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:47	8.43	8.16	30.36	28.58	1.86	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Flood	Surface	1	9:47	8.37	8.15	30.38	28.48	2.07	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.9	9:46	8.37	8.17	30.58	28.42	2.43	3
WSR37	20220630	Cloudy	Moderate	Mid-Flood	Middle	3.9	9:46	8.32	8.13	30.6	28.55	2.34	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Flood	Bottom	6.8	9:45	8.44	8.15	30.54	28.42	2.08	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Flood	Bottom	6.8	9:45	8.32	8.12	30.66	28.5	2.07	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CE	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	12:17	9.39	8.15	32.48	26.25	3.88	2.5
CE	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	12:17	9.34	8.21	32.49	26.18	3.7	2.5
CE	20220602	Cloudy	Moderate	Mid-Ebb	Middle	10.85	12:16	9.3	8.16	32.45	26.09	3.95	2.5
CE	20220602	Cloudy	Moderate	Mid-Ebb	Middle	10.85	12:16	9.34	8.19	32.35	26.14	3.92	2.5
CE	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	20.7	12:15	9.39	8.13	32.45	26.25	4.31	2.5
CE	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	20.7	12:15	9.24	8.2	32.56	26.22	4.16	2.5
CF	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	14:56	9.54	8.25	32.61	26.44	3.12	2.5
CF	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	14:56	9.46	8.22	32.63	26.44	3	2.5
CF	20220602	Cloudy	Moderate	Mid-Ebb	Middle	10	14:55	9.57	8.26	32.38	26.46	3.36	3
CF	20220602	Cloudy	Moderate	Mid-Ebb	Middle	10	14:55	9.44	8.18	32.55	26.35	3.5	2.5
CF	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	19	14:54	9.61	8.19	32.57	26.48	3.84	2.5
CF	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	19	14:54	9.36	8.27	32.38	26.52	3.85	3
WSR01	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	14:32	8.71	8.19	32.39	26.4	3.49	2.5
WSR01	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	14:32	8.48	8.16	32.43	26.4	2.97	2.5
WSR01	20220602	Cloudy	Moderate	Mid-Ebb	Middle	4.35	14:31	8.58	8.16	32.47	26.34	2.79	2.5
WSR01	20220602	Cloudy	Moderate	Mid-Ebb	Middle	4.35	14:31	8.74	8.11	32.29	26.36	3.03	2.5
WSR01	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	7.7	14:30	8.67	8.19	32.46	26.32	2.64	2.5
WSR01	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	7.7	14:30	8.72	8.11	32.56	26.38	2.45	4
WSR02	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	14:13	8.53	8.13	32.07	26.43	1.94	2.5
WSR02	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	14:13	8.65	8.14	31.94	26.55	1.81	2.5
WSR02	20220602	Cloudy	Moderate	Mid-Ebb	Middle	4.9	14:12	8.55	8.12	31.84	26.47	2.09	2.5
WSR02	20220602	Cloudy	Moderate	Mid-Ebb	Middle	4.9	14:12	8.69	8.13	32.04	26.47	2	2.5
WSR02	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	14:11	8.62	8.1	32.11	26.46	2.22	3
WSR02	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	14:11	8.64	8.12	31.86	26.5	2.18	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:57	9	8.1	31.83	26.33	3.84	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:57	9	8.12	31.91	26.44	3.43	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.7	13:56	9.2	8.12	31.85	26.39	3.22	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.7	13:56	9.03	8.19	32.08	26.41	3.4	2.5
WSR03	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	13:55	9.29	8.17	32.05	26.32	2.58	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR03	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	13:55	9.27	8.17	31.87	26.48	3.04	3
WSR04	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:44	9.1	8.25	31.96	25.93	2.91	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:44	9.09	8.26	32.02	25.81	2.67	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.75	13:43	9.15	8.17	32.02	25.85	2.46	3
WSR04	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.75	13:43	9.15	8.23	32.11	25.87	2.28	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.5	13:42	9.06	8.17	32.06	25.91	2.28	2.5
WSR04	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.5	13:42	9.19	8.21	32.09	25.87	2.54	3
WSR16	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	12:40	8.54	8.17	31.99	25.74	2.84	3
WSR16	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	12:40	8.51	8.11	31.8	25.72	3	3
WSR16	20220602	Cloudy	Moderate	Mid-Ebb	Middle	8.25	12:39	8.63	8.14	32	25.78	3.1	4
WSR16	20220602	Cloudy	Moderate	Mid-Ebb	Middle	8.25	12:39	8.55	8.14	31.81	25.89	2.64	3
WSR16	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	15.5	12:38	8.63	8.15	31.97	25.83	3.1	3
WSR16	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	15.5	12:38	8.53	8.14	31.8	25.72	2.74	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:30	9.1	8.22	31.82	25.91	3.57	4
WSR33	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:30	9.08	8.21	31.85	25.9	3.36	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.55	13:29	9.18	8.18	31.75	25.95	2.95	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.55	13:29	9.05	8.14	31.78	25.94	2.86	2.5
WSR33	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	13:28	8.99	8.22	31.74	25.9	3.47	3
WSR33	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	13:28	9.04	8.21	31.86	25.9	3.17	2.5
WSR36	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:16	8.74	8.25	31.98	26.4	4.06	2.5
WSR36	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:16	8.73	8.23	32.03	26.45	3.53	3
WSR36	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.85	13:16	8.74	8.24	32.01	26.46	3.79	3
WSR36	20220602	Cloudy	Moderate	Mid-Ebb	Middle	3.85	13:16	8.82	8.26	31.8	26.36	3.65	2.5
WSR36	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	13:15	8.7	8.3	31.89	26.36	3.48	2.5
WSR36	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	13:15	8.74	8.25	31.82	26.41	3.13	2.5
WSR37	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:02	8.63	8.21	32.43	26.22	3.57	4
WSR37	20220602	Cloudy	Moderate	Mid-Ebb	Surface	1	13:02	8.81	8.26	32.29	26.26	3.88	4
WSR37	20220602	Cloudy	Moderate	Mid-Ebb	Middle	4.45	13:01	8.8	8.24	32.33	26.26	3.57	3
WSR37	20220602	Cloudy	Moderate	Mid-Ebb	Middle	4.45	13:01	8.83	8.2	32.28	26.31	3.17	2.5
WSR37	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	7.9	13:00	8.55	8.27	32.5	26.33	2.85	3
WSR37	20220602	Cloudy	Moderate	Mid-Ebb	Bottom	7.9	13:00	8.76	8.24	32.47	26.38	2.75	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CE	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	12:56	9.26	8.13	31.67	25.31	5.02	3
CE	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	12:56	9.54	8.15	31.72	25.37	4.85	2.5
CE	20220604	Cloudy	Moderate	Mid-Ebb	Middle	11.2	12:55	9.68	8.14	31.65	25.21	5.44	2.5
CE	20220604	Cloudy	Moderate	Mid-Ebb	Middle	11.2	12:55	9.58	8.15	31.67	25.36	5.29	3
CE	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	21.4	12:54	9.68	8.13	31.68	25.27	5.72	3
CE	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	21.4	12:54	9.75	8.16	31.77	25.3	5.65	2.5
CF	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	15:30	8.63	8.25	32.31	25.47	4.46	3
CF	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	15:30	8.43	8.32	32.26	25.44	4.29	5
CF	20220604	Cloudy	Moderate	Mid-Ebb	Middle	9.7	15:29	8.47	8.24	32.24	25.52	4.66	2.5
CF	20220604	Cloudy	Moderate	Mid-Ebb	Middle	9.7	15:29	8.73	8.29	32.16	25.59	4.56	3
CF	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	18.4	15:28	8.66	8.29	32.32	25.45	4.82	2.5
CF	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	18.4	15:28	8.43	8.3	32.41	25.46	4.73	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	15:07	8.5	8.29	32.24	25.84	4.03	3
WSR01	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	15:07	8.49	8.27	32.41	25.9	4.7	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Ebb	Middle	4.25	15:06	8.76	8.32	32.26	25.88	4.21	3
WSR01	20220604	Cloudy	Moderate	Mid-Ebb	Middle	4.25	15:06	8.71	8.28	32.33	26	4.15	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	15:05	8.55	8.32	32.37	25.93	4.05	2.5
WSR01	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	15:05	8.66	8.3	32.4	25.87	3.45	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:50	8.98	8.19	32.01	25.84	2.53	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:50	9.15	8.18	31.98	25.85	2.43	3
WSR02	20220604	Cloudy	Moderate	Mid-Ebb	Middle	4.75	14:49	8.73	8.24	31.93	25.8	2.87	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Ebb	Middle	4.75	14:49	8.78	8.17	32.05	25.88	2.77	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	14:48	9.11	8.23	32.07	25.89	3.02	2.5
WSR02	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	14:48	9.08	8.15	31.95	25.79	2.93	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:34	9.11	8.17	31.24	25.34	4.46	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:34	9.41	8.2	31.33	25.3	4.03	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Ebb	Middle	4	14:33	8.96	8.23	31.16	25.24	4.11	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Ebb	Middle	4	14:33	9.02	8.21	31.27	25.26	3.81	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	7	14:32	9.23	8.25	31.18	25.38	3.7	2.5
WSR03	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	7	14:32	9.21	8.24	31.13	25.28	3.88	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:22	8.71	8.19	32.08	25.91	4.61	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR04	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:22	8.37	8.16	31.93	25.92	4.46	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.5	14:21	8.53	8.21	32.05	25.81	3.87	3
WSR04	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.5	14:21	8.72	8.15	32.14	25.9	4.27	2.5
WSR04	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	6	14:20	8.49	8.17	32	25.87	4.09	3
WSR04	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	6	14:20	8.66	8.19	32.05	25.85	3.63	5
WSR16	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	13:19	9.29	8.3	32.07	25.95	5.12	2.5
WSR16	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	13:19	9.41	8.24	31.85	25.84	4.48	2.5
WSR16	20220604	Cloudy	Moderate	Mid-Ebb	Middle	7.9	13:18	9.2	8.31	32.07	25.8	4.15	4
WSR16	20220604	Cloudy	Moderate	Mid-Ebb	Middle	7.9	13:18	9.17	8.32	31.93	25.81	4.33	2.5
WSR16	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	14.8	13:17	9.29	8.26	32.02	25.91	3.86	5
WSR16	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	14.8	13:17	9.52	8.28	32.01	25.81	4.35	3
WSR33	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:07	9.43	8.17	32.4	26.11	3.66	3
WSR33	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	14:07	9.19	8.18	32.37	26.03	4	3
WSR33	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.55	14:06	9.33	8.15	32.22	25.98	3.85	3
WSR33	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.55	14:06	9.03	8.14	32.2	26.01	3.47	2.5
WSR33	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	14:05	9.47	8.16	32.3	25.93	3.61	3
WSR33	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	14:05	9.12	8.15	32.34	25.98	3.07	4
WSR36	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	13:53	8.82	8.16	31.45	25.97	4.2	2.5
WSR36	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	13:53	8.8	8.18	31.35	26.07	3.75	2.5
WSR36	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.4	13:53	8.92	8.18	31.35	25.92	3.78	4
WSR36	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.4	13:53	8.78	8.21	31.58	25.97	4.11	3
WSR36	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	5.8	13:52	8.81	8.22	31.44	25.89	3.28	2.5
WSR36	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	5.8	13:52	8.94	8.22	31.42	26.01	3.59	3
WSR37	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	13:40	8.4	8.27	31.28	25.92	4.87	3
WSR37	20220604	Cloudy	Moderate	Mid-Ebb	Surface	1	13:40	8.67	8.28	31.37	26.04	4.71	4
WSR37	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.9	13:39	8.63	8.3	31.27	26.01	4.19	4
WSR37	20220604	Cloudy	Moderate	Mid-Ebb	Middle	3.9	13:39	8.37	8.3	31.19	25.97	4.53	3
WSR37	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	13:38	8.36	8.27	31.34	25.95	4.33	3
WSR37	20220604	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	13:38	8.38	8.26	31.36	25.92	4.17	4
CE	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	15:42	8.18	8.2	30.57	26.48	4.01	4
CE	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	15:42	8.2	8.19	30.75	26.44	3.91	6

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CE	20220607	Cloudy	Moderate	Mid-Ebb	Middle	11.95	15:41	8.19	8.18	30.69	26.52	3.94	4
CE	20220607	Cloudy	Moderate	Mid-Ebb	Middle	11.95	15:41	8.1	8.19	30.7	26.52	4.15	4
CE	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	22.9	15:40	8.3	8.2	30.64	26.46	4.28	4
CE	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	22.9	15:40	8.1	8.18	30.69	26.49	4.39	5
CF	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	18:16	8.67	8.17	31.48	26.63	3.68	3
CF	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	18:16	8.83	8.2	31.58	26.44	3.69	4
CF	20220607	Cloudy	Moderate	Mid-Ebb	Middle	10.35	18:15	8.72	8.18	31.5	26.56	3.95	2.5
CF	20220607	Cloudy	Moderate	Mid-Ebb	Middle	10.35	18:15	8.74	8.18	31.58	26.53	3.86	4
CF	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	19.7	18:14	8.77	8.2	31.46	26.44	4.11	4
CF	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	19.7	18:14	8.71	8.19	31.51	26.54	4.12	6
WSR01	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:52	8.16	8.24	31.53	26.38	2.43	5
WSR01	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:52	8.14	8.18	31.57	26.57	2.63	4
WSR01	20220607	Cloudy	Moderate	Mid-Ebb	Middle	4.15	17:51	8.16	8.2	31.43	26.55	2.41	4
WSR01	20220607	Cloudy	Moderate	Mid-Ebb	Middle	4.15	17:51	8.07	8.25	31.6	26.48	2.57	7
WSR01	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	7.3	17:50	8.09	8.18	31.58	26.47	2.7	4
WSR01	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	7.3	17:50	8.15	8.26	31.62	26.51	2.68	6
WSR02	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:33	8.39	8.33	30.68	26.33	1.93	5
WSR02	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:33	8.37	8.24	30.81	26.43	1.88	4
WSR02	20220607	Cloudy	Moderate	Mid-Ebb	Middle	4.9	17:32	8.57	8.34	30.65	26.33	2.09	4
WSR02	20220607	Cloudy	Moderate	Mid-Ebb	Middle	4.9	17:32	8.5	8.26	30.61	26.27	2.03	4
WSR02	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	17:31	8.59	8.31	30.79	26.27	2.25	4
WSR02	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	17:31	8.51	8.29	30.6	26.26	2.19	4
WSR03	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:18	8.62	8.22	30.91	26.9	3.55	6
WSR03	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:18	8.67	8.29	30.87	26.86	3.56	5
WSR03	20220607	Cloudy	Moderate	Mid-Ebb	Middle	4.25	17:17	8.6	8.23	30.91	26.95	3.1	5
WSR03	20220607	Cloudy	Moderate	Mid-Ebb	Middle	4.25	17:17	8.64	8.3	30.86	26.84	3.61	4
WSR03	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	17:16	8.5	8.26	30.84	26.85	3.31	6
WSR03	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	17:16	8.66	8.29	30.99	26.81	3.11	3
WSR04	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:06	9.05	8.32	31.43	26.39	3.09	18
WSR04	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	17:06	9.12	8.26	31.33	26.4	3.46	16
WSR04	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.7	17:05	9.08	8.32	31.54	26.29	3.66	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR04	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.7	17:05	8.99	8.35	31.57	26.22	3.52	5
WSR04	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	17:04	9.13	8.3	31.5	26.19	3.12	9
WSR04	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	17:04	8.96	8.29	31.4	26.3	3.19	6
WSR16	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	16:04	8.67	8.19	30.69	26.66	3.42	6
WSR16	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	16:04	8.53	8.18	30.66	26.77	3.77	3
WSR16	20220607	Cloudy	Moderate	Mid-Ebb	Middle	7.55	16:03	8.65	8.19	30.69	26.81	3.22	8
WSR16	20220607	Cloudy	Moderate	Mid-Ebb	Middle	7.55	16:03	8.63	8.17	30.5	26.84	3.43	6
WSR16	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	14.1	16:02	8.69	8.17	30.72	26.72	3.04	5
WSR16	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	14.1	16:02	8.62	8.18	30.67	26.73	2.67	4
WSR33	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	16:53	8.19	8.17	31.3	26.63	3.23	4
WSR33	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	16:53	8.2	8.2	31.23	26.82	2.92	4
WSR33	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.55	16:52	8.21	8.2	31.34	26.66	2.99	4
WSR33	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.55	16:52	8.13	8.17	31.35	26.71	3.1	4
WSR33	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	16:51	8.12	8.2	31.41	26.66	2.67	5
WSR33	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	16:51	8.19	8.2	31.39	26.75	2.68	6
WSR36	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	0:00	8.2	8.18	31.34	26.81	3.44	5
WSR36	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	16:39	8.21	8.21	31.24	26.89	3.8	4
WSR36	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.3	16:39	8.1	8.24	31.3	26.9	3.43	5
WSR36	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.3	16:39	8.16	8.19	31.2	26.8	3.78	5
WSR36	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	5.6	16:38	8.21	8.25	31.3	26.99	3.3	5
WSR36	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	5.6	16:38	8.08	8.17	31.22	26.88	3.6	4
WSR37	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	16:26	8.41	8.17	31.72	26.61	3.98	4
WSR37	20220607	Cloudy	Moderate	Mid-Ebb	Surface	1	16:26	8.57	8.18	31.68	26.83	3.96	4
WSR37	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.8	16:25	8.51	8.19	31.54	26.79	3.22	4
WSR37	20220607	Cloudy	Moderate	Mid-Ebb	Middle	3.8	16:25	8.62	8.19	31.6	26.79	3.2	4
WSR37	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	16:24	8.51	8.19	31.73	26.68	3.22	5
WSR37	20220607	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	16:24	8.61	8.18	31.64	26.8	3.56	5
CE	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	8:02	8.56	8.28	32.52	27.48	3.67	10
CE	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	8:02	8.68	8.29	32.72	27.55	3.58	8
CE	20220609	Cloudy	Moderate	Mid-Ebb	Middle	11.9	8:01	8.66	8.3	32.72	27.44	3.89	8
CE	20220609	Cloudy	Moderate	Mid-Ebb	Middle	11.9	8:01	8.64	8.24	32.69	27.53	3.74	7

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CE	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	22.8	8:00	8.6	8.25	32.59	27.3	3.91	6
CE	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	22.8	8:00	8.66	8.26	32.68	27.49	4.25	6
CF	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	10:42	8.68	8.17	31.97	27.02	3.32	5
CF	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	10:42	8.67	8.15	31.97	27.14	3.29	5
CF	20220609	Cloudy	Moderate	Mid-Ebb	Middle	9.75	10:41	8.74	8.22	31.76	27.04	3.65	6
CF	20220609	Cloudy	Moderate	Mid-Ebb	Middle	9.75	10:41	8.73	8.16	31.96	26.94	3.45	3
CF	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	18.5	10:40	8.56	8.22	31.84	26.96	3.78	4
CF	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	18.5	10:40	8.74	8.17	31.66	27.07	3.69	5
WSR01	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	10:18	8.71	8.28	31.8	27.1	3.66	4
WSR01	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	10:18	8.65	8.26	31.94	27.08	3.28	4
WSR01	20220609	Cloudy	Moderate	Mid-Ebb	Middle	4.3	10:17	8.76	8.23	31.66	27.03	3.35	9
WSR01	20220609	Cloudy	Moderate	Mid-Ebb	Middle	4.3	10:17	8.6	8.31	31.72	27.13	2.91	7
WSR01	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	7.6	10:16	8.66	8.3	31.96	26.97	3.23	7
WSR01	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	7.6	10:16	8.64	8.28	31.67	26.99	2.93	4
WSR02	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:59	8.48	8.21	32.61	27.4	2.04	5
WSR02	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:59	8.4	8.18	32.58	27.58	1.98	5
WSR02	20220609	Cloudy	Moderate	Mid-Ebb	Middle	4.75	9:58	8.4	8.25	32.52	27.57	2.15	2.5
WSR02	20220609	Cloudy	Moderate	Mid-Ebb	Middle	4.75	9:58	8.48	8.21	32.68	27.48	2.12	3
WSR02	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	9:57	8.4	8.22	32.67	27.56	2.3	3
WSR02	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	9:57	8.33	8.23	32.44	27.45	2.19	2.5
WSR03	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:42	9.47	8.18	31.97	27.43	3.28	3
WSR03	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:42	9.35	8.19	31.73	27.37	3.52	3
WSR03	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.8	9:41	9.35	8.23	31.75	27.25	3.17	3
WSR03	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.8	9:41	9.39	8.23	31.75	27.44	3.36	2.5
WSR03	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	9:40	9.52	8.23	31.8	27.2	2.82	2.5
WSR03	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	9:40	9.46	8.18	31.62	27.3	3.04	2.5
WSR04	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:30	9.43	8.19	32.61	27.49	3.19	4
WSR04	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:30	9.4	8.2	32.67	27.66	2.96	4
WSR04	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.65	9:29	9.43	8.2	32.63	27.7	2.72	2.5
WSR04	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.65	9:29	9.41	8.2	32.52	27.49	2.74	2.5
WSR04	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.3	9:28	9.33	8.21	32.53	27.56	2.97	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR04	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.3	9:28	9.42	8.21	32.78	27.6	3.06	2.5
WSR16	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	8:24	9.01	8.23	31.98	27.22	3.08	3
WSR16	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	8:24	9.08	8.2	31.84	27.06	3.47	2.5
WSR16	20220609	Cloudy	Moderate	Mid-Ebb	Middle	8	8:23	8.93	8.28	31.63	27.06	3.4	2.5
WSR16	20220609	Cloudy	Moderate	Mid-Ebb	Middle	8	8:23	9.02	8.25	31.89	27.23	3.09	2.5
WSR16	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	15	8:22	9.04	8.26	31.9	27.09	3.08	2.5
WSR16	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	15	8:22	8.99	8.22	31.83	27.11	3.08	2.5
WSR33	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:16	8.7	8.26	31.82	26.92	3.26	2.5
WSR33	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:16	8.74	8.3	31.9	26.9	3.57	2.5
WSR33	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.8	9:15	8.75	8.27	31.75	26.86	2.85	2.5
WSR33	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.8	9:15	8.69	8.3	31.9	26.87	3.2	2.5
WSR33	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	9:14	8.62	8.27	31.84	26.83	2.98	2.5
WSR33	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	9:14	8.66	8.32	31.8	26.86	3.09	2.5
WSR36	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:01	9.28	8.28	32.39	26.88	3.1	2.5
WSR36	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	9:01	9.3	8.27	32.5	26.91	3.03	2.5
WSR36	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.7	9:01	9.34	8.31	32.45	27	3.19	2.5
WSR36	20220609	Cloudy	Moderate	Mid-Ebb	Middle	3.7	9:01	9.18	8.28	32.64	26.91	3.31	2.5
WSR36	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	9:00	9.2	8.28	32.49	27	3.17	2.5
WSR36	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	9:00	9.26	8.26	32.54	26.92	2.83	2.5
WSR37	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	8:47	8.89	8.18	32.18	26.76	3.6	2.5
WSR37	20220609	Cloudy	Moderate	Mid-Ebb	Surface	1	8:47	8.94	8.23	32.03	26.79	3.26	2.5
WSR37	20220609	Cloudy	Moderate	Mid-Ebb	Middle	4.05	8:46	8.9	8.17	32.33	26.81	3.18	2.5
WSR37	20220609	Cloudy	Moderate	Mid-Ebb	Middle	4.05	8:46	8.94	8.2	32.34	26.75	2.89	2.5
WSR37	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	7.1	8:45	8.97	8.22	32.34	26.75	2.77	2.5
WSR37	20220609	Cloudy	Moderate	Mid-Ebb	Bottom	7.1	8:45	8.97	8.19	32.12	26.8	2.74	4
CE	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	8:06	9.34	8.4	33.1	26.84	3.54	5
CE	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	8:06	9.14	8.38	33.02	26.85	3.68	3
CE	20220611	Cloudy	Moderate	Mid-Ebb	Middle	11.4	8:05	9.3	8.37	32.93	26.89	3.58	3
CE	20220611	Cloudy	Moderate	Mid-Ebb	Middle	11.4	8:05	9.16	8.38	32.84	26.92	3.67	3
CE	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	21.8	8:04	9.24	8.37	33.09	26.91	3.91	3
CE	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	21.8	8:04	9.21	8.39	32.84	26.95	4.07	5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CF	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	10:44	8.68	8.22	32.93	26.27	2.98	5
CF	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	10:44	8.76	8.25	32.86	26.29	3.27	4
CF	20220611	Cloudy	Moderate	Mid-Ebb	Middle	9.95	10:43	8.68	8.28	32.61	26.35	3.19	3
CF	20220611	Cloudy	Moderate	Mid-Ebb	Middle	9.95	10:43	8.57	8.24	32.66	26.26	3.01	2.5
CF	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	18.9	10:42	8.6	8.21	32.98	26.27	3.48	4
CF	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	18.9	10:42	8.63	8.19	32.8	26.3	3.35	4
WSR01	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	10:21	8.56	8.17	32.38	26.35	3.06	3
WSR01	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	10:21	8.52	8.16	32.56	26.24	2.84	3
WSR01	20220611	Cloudy	Moderate	Mid-Ebb	Middle	4.75	10:20	8.51	8.18	32.4	26.31	2.64	3
WSR01	20220611	Cloudy	Moderate	Mid-Ebb	Middle	4.75	10:20	8.75	8.25	32.49	26.4	2.93	3
WSR01	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	10:19	8.61	8.21	32.27	26.26	2.34	3
WSR01	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	10:19	8.49	8.17	32.57	26.25	2.1	3
WSR02	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	10:02	9.37	8.08	32.87	26.41	2.35	3
WSR02	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	10:02	9.42	8.08	32.54	26.3	2.75	3
WSR02	20220611	Cloudy	Moderate	Mid-Ebb	Middle	4.55	10:01	9.4	8.11	32.94	26.4	2.69	4
WSR02	20220611	Cloudy	Moderate	Mid-Ebb	Middle	4.55	10:01	9.36	8.15	32.84	26.36	2.77	3
WSR02	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	8.1	10:00	9.39	8.08	32.69	26.36	2.71	3
WSR02	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	8.1	10:00	9.21	8.11	32.86	26.25	2.6	4
WSR03	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:47	9.27	8.14	32.25	26.65	2.97	5
WSR03	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:47	9.38	8.15	32.27	26.52	3.17	4
WSR03	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.9	9:46	9.46	8.15	32.29	26.54	2.3	17
WSR03	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.9	9:46	9.5	8.13	32.32	26.49	2.29	18
WSR03	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	9:45	9.35	8.06	32.23	26.59	2.67	4
WSR03	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	9:45	9.28	8.13	32.03	26.47	2.6	4
WSR04	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:34	8.4	8.37	32.83	26.56	2.14	11
WSR04	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:34	8.29	8.28	32.91	26.59	2.12	9
WSR04	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.8	9:33	8.32	8.35	32.76	26.68	2.53	4
WSR04	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.8	9:33	8.46	8.33	32.72	26.52	2.71	3
WSR04	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	9:32	8.24	8.3	32.83	26.66	2.7	3
WSR04	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	9:32	8.27	8.37	32.72	26.63	2.69	6
WSR16	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	8:30	8.87	8.08	32.48	26.22	2.88	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR16	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	8:30	8.89	8.09	32.57	26.21	2.69	4
WSR16	20220611	Cloudy	Moderate	Mid-Ebb	Middle	8.45	8:29	8.67	8.07	32.59	26.1	2.68	4
WSR16	20220611	Cloudy	Moderate	Mid-Ebb	Middle	8.45	8:29	8.89	8.15	32.19	26.1	2.36	4
WSR16	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	15.9	8:28	8.67	8.07	32.54	26.11	2.26	3
WSR16	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	15.9	8:28	8.64	8.15	32.49	26.21	2.21	3
WSR33	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:20	9.14	8.26	32.24	26.15	2.59	4
WSR33	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:20	9.03	8.22	32.25	26.09	2.98	3
WSR33	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.6	9:19	9.1	8.21	32.32	26.19	2.84	4
WSR33	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.6	9:19	8.95	8.27	32.11	26.22	2.94	4
WSR33	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	9:18	9.11	8.3	32.22	26.26	2.36	3
WSR33	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	9:18	9.14	8.27	32.12	26.1	2.65	4
WSR36	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:06	8.25	8.25	32.61	26.79	3.01	3
WSR36	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	9:06	8.36	8.17	32.52	26.82	2.51	3
WSR36	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.3	9:06	8.35	8.24	32.51	26.76	2.85	3
WSR36	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.3	9:06	8.32	8.21	32.75	26.66	2.86	6
WSR36	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	5.6	9:05	8.36	8.19	32.6	26.78	2.73	3
WSR36	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	5.6	9:05	8.35	8.18	32.57	26.78	2.37	4
WSR37	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	8:52	8.9	8.09	32.56	26.16	2.16	4
WSR37	20220611	Cloudy	Moderate	Mid-Ebb	Surface	1	8:52	8.82	8.1	32.31	26.07	2.12	4
WSR37	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.3	8:52	8.84	8.13	32.33	26.15	2.11	4
WSR37	20220611	Cloudy	Moderate	Mid-Ebb	Middle	3.3	8:51	8.86	8.12	32.36	26.1	2.08	5
WSR37	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	8:51	8.91	8.11	32.23	26.22	2.27	4
WSR37	20220611	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	8:51	8.75	8.09	32.24	26.2	2.36	4
CE	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	9:24	8.27	8.34	30.94	26.79	3.51	3
CE	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	9:24	8.24	8.29	31.05	26.82	3.48	4
CE	20220613	Cloudy	Moderate	Mid-Ebb	Middle	10.6	9:23	8.31	8.31	30.96	26.81	3.77	3
CE	20220613	Cloudy	Moderate	Mid-Ebb	Middle	10.6	9:23	8.27	8.36	31.04	27.03	3.7	3
CE	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	20.2	9:22	8.37	8.31	31.01	26.8	3.97	3
CE	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	20.2	9:22	8.27	8.32	30.96	27.02	4.13	4
CF	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	12:02	8.71	8.36	30.89	27.07	2.68	4
CF	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	12:02	8.65	8.38	30.85	26.97	2.51	6

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CF	20220613	Cloudy	Moderate	Mid-Ebb	Middle	10.75	12:01	8.52	8.36	30.8	26.91	2.98	4
CF	20220613	Cloudy	Moderate	Mid-Ebb	Middle	10.75	12:01	8.51	8.3	30.83	26.78	2.88	3
CF	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	20.5	12:00	8.53	8.32	30.83	26.88	3.35	3
CF	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	20.5	12:00	8.69	8.36	30.79	26.82	3.21	4
WSR01	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	11:39	8.52	8.24	31.27	27	2.74	3
WSR01	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	11:39	8.37	8.2	31.1	26.99	2.49	4
WSR01	20220613	Cloudy	Moderate	Mid-Ebb	Middle	4.4	11:38	8.55	8.17	31.07	27.22	2.63	4
WSR01	20220613	Cloudy	Moderate	Mid-Ebb	Middle	4.4	11:38	8.48	8.21	31.06	26.99	2.9	4
WSR01	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	7.8	11:37	8.4	8.24	31.08	27.03	3.06	3
WSR01	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	7.8	11:37	8.47	8.19	31.19	27.23	3.26	3
WSR02	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	11:20	9.17	8.32	30.78	26.87	3.01	3
WSR02	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	11:20	9.12	8.32	30.76	26.75	2.77	3
WSR02	20220613	Cloudy	Moderate	Mid-Ebb	Middle	4.6	11:19	9.19	8.32	30.76	26.91	2.35	3
WSR02	20220613	Cloudy	Moderate	Mid-Ebb	Middle	4.6	11:19	9.1	8.26	30.76	27.02	2.27	4
WSR02	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	8.2	11:18	9.2	8.34	31.06	26.87	2.38	4
WSR02	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	8.2	11:18	9.07	8.36	30.93	26.89	2.11	3
WSR03	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	11:03	8.25	8.22	31.45	27.34	2.78	5
WSR03	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	11:03	8.35	8.19	31.46	27.2	2.69	7
WSR03	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.75	11:02	8.31	8.23	31.29	27.13	3.12	4
WSR03	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.75	11:02	8.34	8.25	31.49	27.25	2.68	5
WSR03	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.5	11:01	8.25	8.24	31.48	27.21	2.51	2.5
WSR03	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.5	11:01	8.28	8.25	31.36	27.32	2.15	3
WSR04	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:51	8.52	8.18	31.57	27.25	2.63	4
WSR04	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:51	8.54	8.23	31.53	27.13	2.27	5
WSR04	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.55	10:50	8.47	8.21	31.46	27	2.34	6
WSR04	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.55	10:50	8.6	8.17	31.66	27.06	2.47	5
WSR04	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	10:49	8.59	8.2	31.54	26.97	2.35	4
WSR04	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	10:49	8.58	8.21	31.59	27.16	2.4	6
WSR16	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	9:47	8.75	8.3	31.35	27.05	2.68	5
WSR16	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	9:47	8.74	8.29	31.47	27.29	2.8	5
WSR16	20220613	Cloudy	Moderate	Mid-Ebb	Middle	8.1	9:46	8.88	8.29	31.48	27.17	2.7	6

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR16	20220613	Cloudy	Moderate	Mid-Ebb	Middle	8.1	9:46	8.79	8.23	31.35	27.24	2.59	4
WSR16	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	15.2	9:45	8.85	8.26	31.48	27.23	2.31	7
WSR16	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	15.2	9:45	8.73	8.27	31.28	27.3	2.36	7
WSR33	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:37	9.22	8.23	30.76	26.48	2.21	5
WSR33	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:37	9.2	8.22	30.97	26.62	2.55	3
WSR33	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.55	10:36	9.13	8.29	30.92	26.6	2	8
WSR33	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.55	10:36	9.15	8.24	30.8	26.7	2.38	6
WSR33	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	10:35	9.29	8.21	30.96	26.65	2.8	11
WSR33	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	10:35	9.27	8.21	30.96	26.54	2.48	13
WSR36	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:23	8.7	8.3	30.84	27.25	2.99	5
WSR36	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:23	8.74	8.26	30.78	27.34	2.74	8
WSR36	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.65	10:23	8.8	8.21	30.75	27.22	2.3	17
WSR36	20220613	Cloudy	Moderate	Mid-Ebb	Middle	3.65	10:23	8.69	8.3	30.92	27.15	2.45	16
WSR36	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.3	10:22	8.85	8.22	30.84	27.28	2.66	7
WSR36	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	6.3	10:22	8.74	8.2	30.81	27.27	2.28	6
WSR37	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:09	8.29	8.26	30.96	26.86	2.36	6
WSR37	20220613	Cloudy	Moderate	Mid-Ebb	Surface	1	10:09	8.33	8.31	31.09	26.79	2.47	5
WSR37	20220613	Cloudy	Moderate	Mid-Ebb	Middle	4.25	10:08	8.33	8.24	31.02	26.68	2.49	5
WSR37	20220613	Cloudy	Moderate	Mid-Ebb	Middle	4.25	10:08	8.29	8.23	30.96	26.85	2.64	7
WSR37	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	10:07	8.42	8.26	31.02	26.84	2.26	7
WSR37	20220613	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	10:07	8.39	8.27	31.02	26.77	2.48	6
CE	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:00	8.23	8.22	31.53	26.73	4.1	2.5
CE	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:00	8.34	8.2	31.71	26.68	4.37	2.5
CE	20220615	Cloudy	Moderate	Mid-Ebb	Middle	11.05	10:59	8.23	8.23	31.78	26.68	4.79	3
CE	20220615	Cloudy	Moderate	Mid-Ebb	Middle	11.05	10:59	8.21	8.25	31.67	26.62	4.63	2.5
CE	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	21.1	10:58	8.3	8.14	31.61	26.69	4.95	3
CE	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	21.1	10:58	8.24	8.24	31.78	26.61	5.15	3
CF	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	13:37	8.21	8.21	31.91	27.33	3.6	4
CF	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	13:37	8.22	8.22	31.71	27.14	3.55	3
CF	20220615	Cloudy	Moderate	Mid-Ebb	Middle	10.2	13:36	8.21	8.21	31.81	27.11	3.87	3
CF	20220615	Cloudy	Moderate	Mid-Ebb	Middle	10.2	13:36	8.25	8.22	31.53	27.09	3.96	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
CF	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	19.4	13:35	8.26	8.14	31.6	27.1	4.33	2.5
CF	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	19.4	13:35	8.27	8.21	31.64	27.23	4.19	3
WSR01	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	13:14	8.22	8.25	31.76	26.5	2.99	3
WSR01	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	13:14	8.22	8.16	31.57	26.56	2.83	3
WSR01	20220615	Cloudy	Moderate	Mid-Ebb	Middle	4.25	13:13	8.21	8.25	31.57	26.6	2.96	3
WSR01	20220615	Cloudy	Moderate	Mid-Ebb	Middle	4.25	13:13	8.2	8.25	31.87	26.57	3.31	2.5
WSR01	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	13:12	8.21	8.25	31.79	26.39	2.37	3
WSR01	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	7.5	13:12	8.23	8.24	31.89	26.58	2.83	3
WSR02	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:56	8.18	8.17	31.92	27.11	2	2.5
WSR02	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:56	8.33	8.13	31.83	27.29	1.95	3
WSR02	20220615	Cloudy	Moderate	Mid-Ebb	Middle	4.75	12:55	8.18	8.25	31.69	27.2	2.34	2.5
WSR02	20220615	Cloudy	Moderate	Mid-Ebb	Middle	4.75	12:55	8.34	8.22	31.83	27.13	2.35	3
WSR02	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	12:54	8.23	8.22	31.64	27.23	2.6	4
WSR02	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	8.5	12:54	8.25	8.18	31.92	27.23	2.64	2.5
WSR03	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:40	8.19	8.17	31.72	26.68	2.8	3
WSR03	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:40	8.24	8.24	31.57	26.71	2.79	3
WSR03	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.95	12:39	8.25	8.18	31.92	26.63	2.6	3
WSR03	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.95	12:39	8.22	8.18	31.81	26.71	2.55	3
WSR03	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	6.9	12:38	8.2	8.18	31.67	26.68	2.65	3
WSR03	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	6.9	12:38	8.25	8.22	31.67	26.65	2.32	3
WSR04	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:27	8.21	8.21	31.98	27.04	3.33	4
WSR04	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:27	8.24	8.22	31.9	27.18	3.14	3
WSR04	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.55	12:26	8.31	8.17	31.81	26.98	2.96	3
WSR04	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.55	12:26	8.19	8.2	31.72	27	2.89	4
WSR04	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	12:25	8.21	8.17	31.53	27.01	3.12	4
WSR04	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	6.1	12:25	8.18	8.25	31.71	27.15	2.85	3
WSR16	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:22	8.2	8.21	31.98	26.6	3.2	4
WSR16	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:22	8.21	8.13	31.93	26.72	3.48	7
WSR16	20220615	Cloudy	Moderate	Mid-Ebb	Middle	8	11:21	8.23	8.25	31.95	26.64	3.37	16
WSR16	20220615	Cloudy	Moderate	Mid-Ebb	Middle	8	11:21	8.18	8.24	31.79	26.73	2.84	16
WSR16	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	15	11:20	8.28	8.23	31.57	26.69	2.52	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR16	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	15	11:20	8.28	8.18	31.75	26.64	3	3
WSR33	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:12	8.26	8.21	31.87	27.2	2.91	2.5
WSR33	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	12:12	8.23	8.2	31.81	27.13	3.11	3
WSR33	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.65	12:11	8.21	8.24	31.82	27.27	2.48	3
WSR33	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.65	12:11	8.19	8.21	31.57	27.13	2.69	3
WSR33	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	6.3	12:10	8.27	8.16	31.96	27.2	2.11	3
WSR33	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	6.3	12:10	8.26	8.2	31.53	27.26	2.15	3
WSR36	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:58	8.2	8.15	31.98	26.61	3.33	3
WSR36	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:58	8.28	8.13	31.85	26.65	3.22	2.5
WSR36	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.05	11:58	8.25	8.18	31.92	26.7	3.42	3
WSR36	20220615	Cloudy	Moderate	Mid-Ebb	Middle	3.05	11:58	8.3	8.19	31.7	26.69	2.89	3
WSR36	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	5.1	11:57	8.22	8.14	31.65	26.77	2.77	3
WSR36	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	5.1	11:57	8.24	8.16	31.97	26.61	3.1	3
WSR37	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:43	8.24	8.17	31.64	26.38	3.17	3
WSR37	20220615	Cloudy	Moderate	Mid-Ebb	Surface	1	11:43	8.33	8.15	31.87	26.4	3.28	2.5
WSR37	20220615	Cloudy	Moderate	Mid-Ebb	Middle	4.35	11:42	8.28	8.16	31.8	26.54	3.02	2.5
WSR37	20220615	Cloudy	Moderate	Mid-Ebb	Middle	4.35	11:42	8.32	8.22	31.63	26.38	3.15	3
WSR37	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	7.7	11:41	8.19	8.13	31.64	26.59	2.62	3
WSR37	20220615	Cloudy	Moderate	Mid-Ebb	Bottom	7.7	11:41	8.32	8.2	31.56	26.57	2.55	3
CE	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	12:50	9.61	8.29	30.09	26.47	3.26	5
CE	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	12:50	9.56	8.31	29.74	26.64	3.31	5
CE	20220616	Cloudy	Moderate	Mid-Ebb	Middle	10	12:49	9.56	8.29	30.01	26.42	3.24	5
CE	20220616	Cloudy	Moderate	Mid-Ebb	Middle	10	12:49	9.75	8.26	29.73	26.54	3.14	6
CE	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	19	12:48	9.47	8.34	30.02	26.64	3.61	6
CE	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	19	12:48	9.75	8.25	29.59	26.55	3.42	5
CF	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	15:26	9.78	8.3	30.53	26.78	2.59	5
CF	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	15:26	9.68	8.33	30.86	26.76	2.65	5
CF	20220616	Cloudy	Moderate	Mid-Ebb	Middle	10.3	15:25	9.78	8.33	30.73	26.62	2.62	4
CF	20220616	Cloudy	Moderate	Mid-Ebb	Middle	10.3	15:25	9.71	8.24	30.33	26.81	2.71	5
CF	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	19.6	15:24	9.68	8.33	30.84	26.79	2.98	4
CF	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	19.6	15:24	9.77	8.25	30.67	26.58	2.87	7

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR01	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	15:02	9.26	8.23	30.24	26.82	2.48	14
WSR01	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	15:02	9.09	8.27	29.97	26.85	2.3	13
WSR01	20220616	Cloudy	Moderate	Mid-Ebb	Middle	4.2	15:01	9.17	8.25	30.08	26.86	2.2	4
WSR01	20220616	Cloudy	Moderate	Mid-Ebb	Middle	4.2	15:01	9.26	8.32	30.3	26.84	2.34	4
WSR01	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	15:00	9.22	8.25	29.77	27.03	2.48	6
WSR01	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	15:00	9.17	8.25	30.33	27.02	2.53	5
WSR02	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:44	10.17	8.22	30.18	26.37	2.3	4
WSR02	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:44	10.13	8.25	29.96	26.52	2.6	3
WSR02	20220616	Cloudy	Moderate	Mid-Ebb	Middle	4.55	14:43	10.05	8.3	29.9	26.42	2.16	2.5
WSR02	20220616	Cloudy	Moderate	Mid-Ebb	Middle	4.55	14:43	9.99	8.27	29.95	26.52	2.02	2.5
WSR02	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	8.1	14:42	10.13	8.31	30.18	26.44	2.06	3
WSR02	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	8.1	14:42	10.01	8.22	29.6	26.42	2.27	2.5
WSR03	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:29	9.1	8.28	30.86	26.57	2.08	3
WSR03	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:29	8.97	8.28	30.73	26.66	2.15	3
WSR03	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.85	14:28	8.98	8.25	30.8	26.53	2.18	3
WSR03	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.85	14:28	9.1	8.31	30.91	26.68	2.03	2.5
WSR03	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	14:27	9	8.27	30.64	26.69	2.73	3
WSR03	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	14:27	9.09	8.31	30.43	26.58	2.63	3
WSR04	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:17	9.4	8.26	30.81	26.29	2.33	2.5
WSR04	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:17	9.42	8.3	30.27	26.32	2.52	2.5
WSR04	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.85	14:16	9.44	8.32	30.4	26.26	2.28	2.5
WSR04	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.85	14:16	9.49	8.34	30.3	26.49	2.34	3
WSR04	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	14:15	9.5	8.3	30.35	26.48	2.03	3
WSR04	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	14:15	9.36	8.31	30.73	26.26	2.34	3
WSR16	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	13:12	9.29	8.32	30.44	26.23	2.12	4
WSR16	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	13:12	9.32	8.3	30.91	26.26	2.18	3
WSR16	20220616	Cloudy	Moderate	Mid-Ebb	Middle	8.4	13:11	9.32	8.22	30.42	26.1	2.58	3
WSR16	20220616	Cloudy	Moderate	Mid-Ebb	Middle	8.4	13:11	9.28	8.27	30.66	26.12	2.3	3
WSR16	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	15.8	13:10	9.26	8.32	30.65	26.2	2.4	3
WSR16	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	15.8	13:10	9.15	8.33	30.42	26.21	2.14	3
WSR33	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:02	9.93	8.23	30.71	26.93	2.59	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR33	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	14:02	10.11	8.2	30.41	26.89	2.2	5
WSR33	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.7	14:01	10.08	8.14	30.61	26.82	2.04	2.5
WSR33	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.7	14:01	9.99	8.21	30.82	26.87	2.4	2.5
WSR33	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	14:00	9.91	8.15	30.11	26.77	2.31	6
WSR33	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	14:00	10.1	8.2	30.47	26.89	2.29	7
WSR36	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	13:46	9.84	8.27	29.42	26.64	2.79	3
WSR36	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	13:46	9.81	8.34	29.46	26.71	2.37	3
WSR36	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.05	13:46	9.85	8.31	30.13	26.54	2.03	2.5
WSR36	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.05	13:46	9.86	8.26	29.81	26.6	2.09	2.5
WSR36	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	5.1	13:45	9.74	8.25	29.41	26.58	2.24	3
WSR36	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	5.1	13:45	9.85	8.33	29.41	26.61	2.13	2.5
WSR37	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	13:33	9.68	8.3	30.5	26.85	2.47	3
WSR37	20220616	Cloudy	Moderate	Mid-Ebb	Surface	1	13:33	9.84	8.29	30.42	26.95	2.43	3
WSR37	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.85	13:32	9.81	8.33	30.29	26.91	2.12	2.5
WSR37	20220616	Cloudy	Moderate	Mid-Ebb	Middle	3.85	13:32	9.74	8.26	30.02	26.96	2.48	2.5
WSR37	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	13:31	9.82	8.32	30.77	26.77	2.24	3
WSR37	20220616	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	13:31	9.68	8.24	30.36	26.9	2.09	3
CE	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	15:34	9.67	8.21	30.37	27.21	4.91	4
CE	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	15:34	9.48	8.22	30.27	27.11	5.06	4
CE	20220620	Cloudy	Moderate	Mid-Ebb	Middle	11.1	15:33	9.53	8.24	30.17	27.05	5.39	3
CE	20220620	Cloudy	Moderate	Mid-Ebb	Middle	11.1	15:33	9.42	8.2	30.07	27.18	5.16	4
CE	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	21.2	15:32	9.41	8.21	30.33	27.14	5.77	3
CE	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	21.2	15:32	9.39	8.25	30.31	27.05	5.76	4
CF	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	18:10	9.44	8.24	30.63	27.33	4.08	5
CF	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	18:10	9.54	8.24	30.78	27.39	3.87	4
CF	20220620	Cloudy	Moderate	Mid-Ebb	Middle	9.8	18:09	9.74	8.21	30.67	27.44	4.42	3
CF	20220620	Cloudy	Moderate	Mid-Ebb	Middle	9.8	18:09	9.75	8.24	30.82	27.34	4.29	5
CF	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	18.6	18:08	9.41	8.22	30.69	27.53	4.37	3
CF	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	18.6	18:08	9.55	8.23	30.68	27.53	4.45	3
WSR01	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:47	8.67	8.45	30.64	27.33	4.25	4
WSR01	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:47	9.08	8.39	30.57	27.56	4.63	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR01	20220620	Cloudy	Moderate	Mid-Ebb	Middle	4.3	17:46	9.11	8.38	30.61	27.35	4.43	3
WSR01	20220620	Cloudy	Moderate	Mid-Ebb	Middle	4.3	17:46	9.08	8.42	30.59	27.52	4.24	3
WSR01	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	7.6	17:45	8.98	8.43	30.49	27.48	3.55	3
WSR01	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	7.6	17:45	8.7	8.39	30.46	27.43	4.12	4
WSR02	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:28	8.78	8.23	29.92	26.98	2.16	3
WSR02	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:28	9.03	8.27	30.03	27.08	2.04	3
WSR02	20220620	Cloudy	Moderate	Mid-Ebb	Middle	4.8	17:27	9.09	8.21	29.87	27.03	2.28	4
WSR02	20220620	Cloudy	Moderate	Mid-Ebb	Middle	4.8	17:27	8.93	8.25	30.09	27.1	2.13	4
WSR02	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	8.6	17:26	8.92	8.24	29.86	27.06	2.69	4
WSR02	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	8.6	17:26	9.1	8.22	29.88	27.01	2.8	4
WSR03	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:13	9.57	8.27	30.32	27.34	4.46	5
WSR03	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:13	9.48	8.24	30.65	27.44	3.9	4
WSR03	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.85	17:12	9.62	8.21	30.61	27.4	4.34	3
WSR03	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.85	17:12	9.7	8.23	30.53	27.34	4.07	4
WSR03	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	17:11	9.49	8.22	30.62	27.42	3.93	4
WSR03	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	6.7	17:11	9.61	8.21	30.39	27.24	4.04	4
WSR04	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:00	8.38	8.25	30.87	27.14	4.38	4
WSR04	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	17:00	8.73	8.23	30.6	27.26	4.01	5
WSR04	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.45	16:59	8.34	8.24	30.61	27.19	3.69	4
WSR04	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.45	16:59	8.52	8.24	30.79	27.28	3.72	4
WSR04	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	5.9	16:58	8.38	8.27	30.87	27.22	3.54	3
WSR04	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	5.9	16:58	8.59	8.27	30.84	27.21	3.78	5
WSR16	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	15:56	9.43	8.34	30.51	27.42	5.11	3
WSR16	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	15:56	9.47	8.41	30.46	27.28	4.92	4
WSR16	20220620	Cloudy	Moderate	Mid-Ebb	Middle	8.45	15:55	9.72	8.36	30.58	27.41	4.15	3
WSR16	20220620	Cloudy	Moderate	Mid-Ebb	Middle	8.45	15:55	9.42	8.34	30.47	27.28	4.93	4
WSR16	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	15.9	15:54	9.64	8.38	30.47	27.39	4.39	3
WSR16	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	15.9	15:54	9.43	8.37	30.71	27.34	4.42	3
WSR33	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	16:46	9.51	8.42	30.73	27.16	4.52	3
WSR33	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	16:46	9.29	8.35	30.68	27.24	4.65	4
WSR33	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.8	16:45	9.46	8.41	30.83	27.24	4.27	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR33	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.8	16:45	9.55	8.37	30.98	27.12	4.1	4
WSR33	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	16:44	9.35	8.4	31.02	27.08	3.57	3
WSR33	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	16:44	9.55	8.36	30.81	27.06	3.57	3
WSR36	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	16:31	8.85	8.27	30.24	27.05	4.33	3
WSR36	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	16:31	8.63	8.25	30.17	27.13	4.28	4
WSR36	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.6	16:31	8.81	8.27	30.32	27	4.03	4
WSR36	20220620	Cloudy	Moderate	Mid-Ebb	Middle	3.6	16:31	8.8	8.28	30.2	26.97	4.09	4
WSR36	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	16:30	8.61	8.29	30.22	27.06	4.08	3
WSR36	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	16:30	8.67	8.22	30.18	27.07	3.53	3
WSR37	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	16:18	9.06	8.23	30.77	27.21	4.2	4
WSR37	20220620	Cloudy	Moderate	Mid-Ebb	Surface	1	16:18	8.67	8.25	30.68	27.25	4.48	5
WSR37	20220620	Cloudy	Moderate	Mid-Ebb	Middle	4.1	16:17	8.91	8.26	30.79	27.34	4.03	4
WSR37	20220620	Cloudy	Moderate	Mid-Ebb	Middle	4.1	16:17	8.91	8.2	30.58	27.19	3.62	4
WSR37	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	7.2	16:16	8.98	8.21	30.58	27.31	3.96	3
WSR37	20220620	Cloudy	Moderate	Mid-Ebb	Bottom	7.2	16:16	8.77	8.26	30.93	27.32	3.35	3
CE	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	16:29	9.88	8.37	30.87	27.4	4.49	3
CE	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	16:29	9.83	8.36	31.04	27.38	4.67	4
CE	20220622	Sunny	Moderate	Mid-Ebb	Middle	10.5	16:28	9.84	8.34	30.85	27.36	4.73	3
CE	20220622	Sunny	Moderate	Mid-Ebb	Middle	10.5	16:28	9.89	8.38	31.08	27.5	4.77	2.5
CE	20220622	Sunny	Moderate	Mid-Ebb	Bottom	20	16:27	9.72	8.35	30.84	27.43	4.9	3
CE	20220622	Sunny	Moderate	Mid-Ebb	Bottom	20	16:27	9.73	8.32	30.87	27.56	4.82	4
CF	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	19:02	9.57	8.38	31.32	27.85	3.84	3
CF	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	19:02	9.6	8.35	31.25	27.87	3.76	5
CF	20220622	Sunny	Moderate	Mid-Ebb	Middle	10.6	19:01	9.56	8.37	31.16	27.84	3.98	4
CF	20220622	Sunny	Moderate	Mid-Ebb	Middle	10.6	19:01	9.58	8.37	31.03	27.78	4.04	4
CF	20220622	Sunny	Moderate	Mid-Ebb	Bottom	20.2	19:00	9.7	8.36	31.21	27.73	4.36	3
CF	20220622	Sunny	Moderate	Mid-Ebb	Bottom	20.2	19:00	9.55	8.41	31.2	27.68	4.16	4
WSR01	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	18:37	9.7	8.29	31.01	27.55	3.12	4
WSR01	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	18:37	9.67	8.33	31.04	27.58	2.82	3
WSR01	20220622	Sunny	Moderate	Mid-Ebb	Middle	4.15	18:36	9.68	8.36	31.11	27.54	2.88	4
WSR01	20220622	Sunny	Moderate	Mid-Ebb	Middle	4.15	18:36	9.62	8.31	31.02	27.6	3.18	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR01	20220622	Sunny	Moderate	Mid-Ebb	Bottom	7.3	18:35	9.61	8.29	30.78	27.71	2.98	3
WSR01	20220622	Sunny	Moderate	Mid-Ebb	Bottom	7.3	18:35	9.58	8.31	30.75	27.67	2.77	4
WSR02	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	18:20	9.86	8.34	31.34	26.99	2.44	4
WSR02	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	18:20	9.81	8.33	31.38	27.03	2.38	4
WSR02	20220622	Sunny	Moderate	Mid-Ebb	Middle	4.55	18:19	9.89	8.32	31.4	26.94	2.89	4
WSR02	20220622	Sunny	Moderate	Mid-Ebb	Middle	4.55	18:19	9.92	8.38	31.46	27.06	2.49	6
WSR02	20220622	Sunny	Moderate	Mid-Ebb	Bottom	8.1	18:18	9.82	8.38	31.55	27.09	2.91	4
WSR02	20220622	Sunny	Moderate	Mid-Ebb	Bottom	8.1	18:18	9.88	8.36	31.28	27.06	2.59	5
WSR03	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	18:06	9.13	8.31	31.65	27.22	2.96	4
WSR03	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	18:06	9.19	8.33	31.34	27.27	2.77	5
WSR03	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.8	18:05	9.18	8.33	31.64	27.14	3.71	4
WSR03	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.8	18:05	9.12	8.29	31.46	27.22	3.34	3
WSR03	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.6	18:04	9.14	8.31	31.55	27.12	3.97	5
WSR03	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.6	18:04	9.23	8.3	31.37	27.08	3.74	3
WSR04	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:53	9.12	8.3	30.72	27.42	3.1	2.5
WSR04	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:53	9.05	8.37	30.68	27.39	3.34	2.5
WSR04	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.85	17:52	8.99	8.31	30.86	27.37	3.08	4
WSR04	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.85	17:52	8.92	8.33	30.93	27.43	3.29	4
WSR04	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.7	17:51	9.08	8.37	30.79	27.35	2.87	4
WSR04	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.7	17:51	9.05	8.37	30.71	27.34	3.34	3
WSR16	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	16:50	9.48	8.13	30.72	27.37	4.33	5
WSR16	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	16:50	9.49	8.1	30.45	27.26	4.17	3
WSR16	20220622	Sunny	Moderate	Mid-Ebb	Middle	8.15	16:49	9.35	8.16	30.52	27.39	3.59	4
WSR16	20220622	Sunny	Moderate	Mid-Ebb	Middle	8.15	16:49	9.32	8.13	30.59	27.27	3.7	3
WSR16	20220622	Sunny	Moderate	Mid-Ebb	Bottom	15.3	16:48	9.39	8.16	30.44	27.38	3.41	5
WSR16	20220622	Sunny	Moderate	Mid-Ebb	Bottom	15.3	16:48	9.52	8.12	30.57	27.4	3.37	4
WSR33	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:40	10.13	8.2	31.24	27.61	2.85	4
WSR33	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:40	10.07	8.25	31.18	27.6	3.04	5
WSR33	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.8	17:39	10.02	8.2	31.27	27.64	3.17	4
WSR33	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.8	17:39	10.07	8.27	31.5	27.5	3.01	4
WSR33	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.6	17:38	10.03	8.26	31.28	27.5	2.65	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR33	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.6	17:38	10.08	8.26	31.28	27.6	2.59	6
WSR36	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:25	9.5	8.25	31.39	27.19	3.18	5
WSR36	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:25	9.69	8.26	31.43	27.16	3.33	5
WSR36	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.05	17:25	9.56	8.27	31.21	27.33	2.61	5
WSR36	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.05	17:25	9.56	8.24	31.37	27.23	2.64	3
WSR36	20220622	Sunny	Moderate	Mid-Ebb	Bottom	5.1	17:24	9.6	8.29	31.46	27.29	2.8	4
WSR36	20220622	Sunny	Moderate	Mid-Ebb	Bottom	5.1	17:24	9.48	8.27	31.48	27.18	3.04	5
WSR37	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:11	9.25	8.34	30.72	27.21	3.29	4
WSR37	20220622	Sunny	Moderate	Mid-Ebb	Surface	1	17:11	9.27	8.3	30.61	27.27	3.78	5
WSR37	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.8	17:10	9.47	8.33	30.64	27.35	3.24	4
WSR37	20220622	Sunny	Moderate	Mid-Ebb	Middle	3.8	17:10	9.41	8.29	30.55	27.18	3.34	3
WSR37	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.6	17:09	9.29	8.31	30.55	27.31	3.24	4
WSR37	20220622	Sunny	Moderate	Mid-Ebb	Bottom	6.6	17:09	9.37	8.29	30.68	27.18	3.32	6
CE	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	8:02	8.83	8.31	31.41	26.95	5.65	2.5
CE	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	8:02	8.88	8.33	31.31	26.7	5.81	2.5
CE	20220624	Cloudy	Moderate	Mid-Ebb	Middle	10.6	8:01	8.96	8.32	31.46	26.78	6.16	3
CE	20220624	Cloudy	Moderate	Mid-Ebb	Middle	10.6	8:01	8.86	8.26	31.2	26.87	5.9	3
CE	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	20.2	8:00	8.91	8.29	31.39	26.85	6.47	3
CE	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	20.2	8:00	8.9	8.34	31.34	26.81	6.38	3
CF	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	10:45	9.15	8.17	31.1	26.6	4.99	4
CF	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	10:45	9.08	8.23	31.39	26.64	5.22	5
CF	20220624	Cloudy	Moderate	Mid-Ebb	Middle	10.05	10:44	9.17	8.24	31.19	26.57	5.33	4
CF	20220624	Cloudy	Moderate	Mid-Ebb	Middle	10.05	10:44	9.21	8.24	31.1	26.47	5.24	4
CF	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	19.1	10:43	9.14	8.23	31.03	26.5	5.51	4
CF	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	19.1	10:43	9.03	8.24	30.98	26.57	5.86	4
WSR01	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	10:18	8.95	8.27	31.29	26.95	5.13	4
WSR01	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	10:18	8.89	8.28	31.04	26.79	4.92	3
WSR01	20220624	Cloudy	Moderate	Mid-Ebb	Middle	4.3	10:17	8.87	8.28	31.23	26.96	5	3
WSR01	20220624	Cloudy	Moderate	Mid-Ebb	Middle	4.3	10:17	8.85	8.3	31.43	26.92	4.54	5
WSR01	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	7.6	10:16	8.79	8.21	31.05	26.8	4.36	4
WSR01	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	7.6	10:16	8.85	8.21	31.37	26.75	4.33	4

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR02	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:59	9.51	8.21	30.39	27.33	4.76	4
WSR02	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:59	9.43	8.16	30.21	27.33	4.44	3
WSR02	20220624	Cloudy	Moderate	Mid-Ebb	Middle	4.9	9:58	9.34	8.19	30.54	27.25	4.72	3
WSR02	20220624	Cloudy	Moderate	Mid-Ebb	Middle	4.9	9:58	9.39	8.23	30.27	27.34	4.77	3
WSR02	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	9:57	9.5	8.14	30.37	27.12	4.12	4
WSR02	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	8.8	9:57	9.41	8.19	30.5	27.3	4.26	4
WSR03	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:42	9.16	8.23	31.11	26.89	4.61	3
WSR03	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:42	9.09	8.16	31.29	26.84	4.62	3
WSR03	20220624	Cloudy	Moderate	Mid-Ebb	Middle	4	9:41	9.18	8.19	31.14	26.82	4.18	3
WSR03	20220624	Cloudy	Moderate	Mid-Ebb	Middle	4	9:41	9.28	8.19	31.25	26.82	4.25	3
WSR03	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	7	9:40	9.22	8.15	31.49	26.89	4.15	3
WSR03	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	7	9:40	9.17	8.15	31.43	26.82	4.43	4
WSR04	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:30	8.69	8.3	31.14	26.98	5.18	3
WSR04	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:30	8.77	8.32	31.17	26.87	4.99	4
WSR04	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.6	9:29	8.82	8.27	31.08	27.05	5.12	3
WSR04	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.6	9:29	8.89	8.32	30.89	26.87	4.38	3
WSR04	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	9:28	8.85	8.33	30.96	26.95	4.78	4
WSR04	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	9:28	8.75	8.32	31.11	27.01	4.72	4
WSR16	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	8:25	9.52	8.25	31.63	26.94	4.16	4
WSR16	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	8:25	9.39	8.27	31.64	26.91	4.21	3
WSR16	20220624	Cloudy	Moderate	Mid-Ebb	Middle	8.4	8:24	9.59	8.23	31.34	27.08	3.88	4
WSR16	20220624	Cloudy	Moderate	Mid-Ebb	Middle	8.4	8:24	9.42	8.28	31.67	27.05	4.4	3
WSR16	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	15.8	8:23	9.39	8.26	31.37	27.01	4.32	3
WSR16	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	15.8	8:23	9.49	8.28	31.46	27	3.86	3
WSR33	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:16	9.3	8.27	30.72	27.09	5.06	4
WSR33	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:16	9.35	8.25	30.63	26.97	4.75	3
WSR33	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.6	9:15	9.22	8.33	30.91	27.12	4.49	2.5
WSR33	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.6	9:15	9.25	8.32	30.91	26.99	4.39	3
WSR33	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	9:14	9.36	8.27	30.58	27.05	4.2	4
WSR33	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	9:14	9.36	8.29	30.8	26.9	4.6	4
WSR36	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:01	9.56	8.26	30.99	26.86	4.49	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR36	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	9:01	9.45	8.24	30.83	26.7	4.9	2.5
WSR36	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.7	9:01	9.34	8.27	30.74	26.69	4.29	2.5
WSR36	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.7	9:01	9.5	8.26	31.05	26.82	4.72	3
WSR36	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	9:00	9.35	8.27	30.85	26.81	4.51	3
WSR36	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.4	9:00	9.45	8.29	30.97	26.82	4.62	3
WSR37	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	8:47	8.83	8.15	31.41	26.94	3.98	2.5
WSR37	20220624	Cloudy	Moderate	Mid-Ebb	Surface	1	8:47	8.86	8.12	31.53	26.98	4.34	2.5
WSR37	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.95	8:46	8.75	8.18	31.54	26.82	4.21	2.5
WSR37	20220624	Cloudy	Moderate	Mid-Ebb	Middle	3.95	8:46	8.85	8.19	31.18	26.85	3.69	2.5
WSR37	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.9	8:45	8.99	8.15	31.14	27.03	3.41	2.5
WSR37	20220624	Cloudy	Moderate	Mid-Ebb	Bottom	6.9	8:45	8.92	8.17	31.48	26.84	3.46	4
CE	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	9:29	8.06	8.12	30.95	28.11	4.17	4
CE	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	9:29	8.09	8.1	30.87	27.95	4.09	4
CE	20220628	Sunny	Moderate	Mid-Ebb	Middle	11.95	9:28	8.12	8.11	30.88	28.08	4.45	4
CE	20220628	Sunny	Moderate	Mid-Ebb	Middle	11.95	9:28	8.09	8.15	31.09	28.01	4.31	4
CE	20220628	Sunny	Moderate	Mid-Ebb	Bottom	22.9	9:27	7.97	8.15	30.91	27.83	4.86	3
CE	20220628	Sunny	Moderate	Mid-Ebb	Bottom	22.9	9:27	8.06	8.17	30.95	27.94	4.75	4
CF	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	12:28	8.93	8.26	30.8	27.78	3.46	5
CF	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	12:28	8.89	8.26	30.82	27.97	3.67	4
CF	20220628	Sunny	Moderate	Mid-Ebb	Middle	10.8	12:27	9.04	8.21	30.84	28.08	3.97	4
CF	20220628	Sunny	Moderate	Mid-Ebb	Middle	10.8	12:27	8.91	8.21	30.7	27.93	3.87	4
CF	20220628	Sunny	Moderate	Mid-Ebb	Bottom	20.6	12:26	8.85	8.23	30.75	28.07	3.95	5
CF	20220628	Sunny	Moderate	Mid-Ebb	Bottom	20.6	12:26	9.06	8.24	30.68	27.83	4.04	6
WSR01	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	12:02	8.38	8.09	31.42	28.56	3.41	5
WSR01	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	12:02	8.31	8.08	31.49	28.25	3.26	5
WSR01	20220628	Sunny	Moderate	Mid-Ebb	Middle	4.6	12:01	8.43	8.05	31.38	28.48	2.93	5
WSR01	20220628	Sunny	Moderate	Mid-Ebb	Middle	4.6	12:01	8.3	8.07	31.44	28.3	3.41	4
WSR01	20220628	Sunny	Moderate	Mid-Ebb	Bottom	8.2	12:00	8.45	8.06	31.26	28.47	2.51	2.5
WSR01	20220628	Sunny	Moderate	Mid-Ebb	Bottom	8.2	12:00	8.42	8.14	31.38	28.55	2.88	4
WSR02	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	11:41	8.49	8.14	30.94	28.52	2.27	4
WSR02	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	11:41	8.31	8.18	30.69	28.55	2.04	5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR02	20220628	Sunny	Moderate	Mid-Ebb	Middle	4.55	11:40	8.32	8.16	30.7	28.35	2.23	5
WSR02	20220628	Sunny	Moderate	Mid-Ebb	Middle	4.55	11:40	8.41	8.16	30.9	28.44	2.08	5
WSR02	20220628	Sunny	Moderate	Mid-Ebb	Bottom	8.1	11:39	8.3	8.2	30.93	28.39	2.41	7
WSR02	20220628	Sunny	Moderate	Mid-Ebb	Bottom	8.1	11:39	8.28	8.14	30.93	28.4	2.33	5
WSR03	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	11:23	8.06	8.12	31.38	28.55	2.85	4
WSR03	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	11:23	8.13	8.21	31.34	28.44	2.89	4
WSR03	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.75	11:22	8.06	8.19	31.27	28.42	2.81	3
WSR03	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.75	11:22	8.04	8.16	31.43	28.34	2.93	5
WSR03	20220628	Sunny	Moderate	Mid-Ebb	Bottom	6.5	11:21	8.2	8.13	31.52	28.3	2.13	3
WSR03	20220628	Sunny	Moderate	Mid-Ebb	Bottom	6.5	11:21	8.02	8.17	31.35	28.39	2.1	5
WSR04	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	11:08	8.08	8.07	31.9	28.04	2.95	5
WSR04	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	11:08	8.21	8.11	31.72	28	2.86	4
WSR04	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.8	11:07	8.16	8.07	31.83	28.1	3.24	4
WSR04	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.8	11:07	8.2	8.07	31.87	28.31	2.75	5
WSR04	20220628	Sunny	Moderate	Mid-Ebb	Bottom	6.6	11:06	8.24	8.07	31.91	28.19	3.04	5
WSR04	20220628	Sunny	Moderate	Mid-Ebb	Bottom	6.6	11:06	8.23	8.1	31.92	28.08	2.96	5
WSR16	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	9:54	8.85	8.02	31.14	27.96	3.28	5
WSR16	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	9:54	8.88	8.1	31.09	27.78	3.31	4
WSR16	20220628	Sunny	Moderate	Mid-Ebb	Middle	8.25	9:53	9.05	8.11	31.16	27.78	2.45	5
WSR16	20220628	Sunny	Moderate	Mid-Ebb	Middle	8.25	9:53	8.9	8.06	31.16	27.85	2.49	4
WSR16	20220628	Sunny	Moderate	Mid-Ebb	Bottom	15.5	9:52	9.01	8.08	31.21	28.03	2.76	4
WSR16	20220628	Sunny	Moderate	Mid-Ebb	Bottom	15.5	9:52	8.98	8.08	31.04	27.99	2.89	5
WSR33	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	10:51	8.92	8.37	31.64	28.13	2.54	4
WSR33	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	10:51	9.02	8.33	31.78	28.19	2.83	4
WSR33	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.65	10:50	8.9	8.32	31.64	28.03	2.4	5
WSR33	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.65	10:50	8.96	8.38	31.56	28.24	2.76	4
WSR33	20220628	Sunny	Moderate	Mid-Ebb	Bottom	6.3	10:49	8.94	8.35	31.76	28.22	2.3	7
WSR33	20220628	Sunny	Moderate	Mid-Ebb	Bottom	6.3	10:49	8.98	8.37	31.65	28.09	2.34	6
WSR36	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	10:34	8.49	8.18	31.76	28.56	3.8	4
WSR36	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	10:34	8.56	8.13	31.55	28.48	3.54	5
WSR36	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.05	10:34	8.44	8.11	31.64	28.4	3.15	5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR36	20220628	Sunny	Moderate	Mid-Ebb	Middle	3.05	10:34	8.44	8.16	31.65	28.38	3.34	5
WSR36	20220628	Sunny	Moderate	Mid-Ebb	Bottom	5.1	10:33	8.56	8.19	31.77	28.46	3	5
WSR36	20220628	Sunny	Moderate	Mid-Ebb	Bottom	5.1	10:33	8.4	8.18	31.69	28.35	3.21	5
WSR37	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	10:18	8.29	8.19	30.94	27.84	3.76	4
WSR37	20220628	Sunny	Moderate	Mid-Ebb	Surface	1	10:18	8.3	8.2	31.06	27.76	3.47	6
WSR37	20220628	Sunny	Moderate	Mid-Ebb	Middle	4.25	10:17	8.3	8.18	31.06	27.71	3.4	5
WSR37	20220628	Sunny	Moderate	Mid-Ebb	Middle	4.25	10:17	8.25	8.11	31	27.94	3.06	4
WSR37	20220628	Sunny	Moderate	Mid-Ebb	Bottom	7.5	10:16	8.31	8.12	31.02	27.96	3.2	3
WSR37	20220628	Sunny	Moderate	Mid-Ebb	Bottom	7.5	10:16	8.31	8.19	30.96	27.85	3.11	4
CE	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	11:26	8.99	8.03	30.67	28.89	3.41	2.5
CE	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	11:26	8.88	8.08	30.73	29	3.28	4
CE	20220630	Cloudy	Moderate	Mid-Ebb	Middle	11	11:25	8.91	8.03	30.66	29.08	3.65	2.5
CE	20220630	Cloudy	Moderate	Mid-Ebb	Middle	11	11:25	8.95	8.09	30.73	28.86	3.57	2.5
CE	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	21	11:24	8.89	8.02	30.85	28.95	3.87	2.5
CE	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	21	11:24	8.83	8.03	30.91	28.98	3.73	2.5
CF	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	14:14	8.57	8.07	31.28	28.89	2.9	2.5
CF	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	14:14	8.56	8.05	31.04	28.78	2.69	3
CF	20220630	Cloudy	Moderate	Mid-Ebb	Middle	10.7	14:13	8.72	8.06	31.4	28.9	2.73	2.5
CF	20220630	Cloudy	Moderate	Mid-Ebb	Middle	10.7	14:13	8.68	8.04	31.33	28.91	2.81	2.5
CF	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	20.4	14:12	8.56	8.07	31.36	28.96	3.07	2.5
CF	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	20.4	14:12	8.72	8.09	31.07	28.85	2.98	3
WSR01	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:50	8.46	8.07	30.16	28.4	2.37	3
WSR01	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:50	8.43	8.11	30.09	28.5	2	3
WSR01	20220630	Cloudy	Moderate	Mid-Ebb	Middle	4.2	13:49	8.45	8.08	30.25	28.54	2.06	3
WSR01	20220630	Cloudy	Moderate	Mid-Ebb	Middle	4.2	13:49	8.5	8.09	30.24	28.57	1.97	2.5
WSR01	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	13:48	8.44	8.13	30.14	28.46	2.24	2.5
WSR01	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	7.4	13:48	8.46	8.07	30.05	28.58	1.96	2.5
WSR02	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:30	8.35	8.13	30.98	28.33	2.58	2.5
WSR02	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:30	8.4	8.14	30.94	28.32	2.24	2.5
WSR02	20220630	Cloudy	Moderate	Mid-Ebb	Middle	4.65	13:29	8.42	8.15	31.08	28.52	2.91	2.5
WSR02	20220630	Cloudy	Moderate	Mid-Ebb	Middle	4.65	13:29	8.36	8.11	30.78	28.36	2.68	3

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR02	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	8.3	13:28	8.45	8.11	31	28.31	2.79	3
WSR02	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	8.3	13:28	8.51	8.14	30.85	28.5	2.35	3
WSR03	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:15	8.56	8.17	30.88	28.82	2.56	3
WSR03	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:15	8.58	8.17	30.57	28.64	2.7	3
WSR03	20220630	Cloudy	Moderate	Mid-Ebb	Middle	4.1	13:14	8.55	8.14	30.6	28.7	2.03	3
WSR03	20220630	Cloudy	Moderate	Mid-Ebb	Middle	4.1	13:14	8.52	8.13	30.9	28.6	2.43	3
WSR03	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	7.2	13:13	8.47	8.16	30.84	28.59	2.39	3
WSR03	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	7.2	13:13	8.51	8.18	30.69	28.77	2.39	3
WSR04	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:02	8.92	8.05	30.43	28.81	2.87	3
WSR04	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	13:02	8.9	8.06	30.4	28.89	2.8	3
WSR04	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.9	13:01	8.84	8	30.58	28.94	2.3	3
WSR04	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.9	13:01	8.95	8.03	30.73	28.94	2.06	2.5
WSR04	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	13:00	8.97	8.05	30.55	29.05	2.38	2.5
WSR04	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	6.8	13:00	8.9	8	30.48	28.95	2.33	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	11:50	8.78	8.15	30.45	28.65	2.56	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	11:50	8.73	8.11	30.2	28.67	2.21	3
WSR16	20220630	Cloudy	Moderate	Mid-Ebb	Middle	8.35	11:49	8.92	8.17	30.53	28.51	1.9	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Ebb	Middle	8.35	11:49	8.77	8.11	30.49	28.63	2.18	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	15.7	11:48	8.95	8.17	30.44	28.67	2.15	2.5
WSR16	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	15.7	11:48	8.75	8.14	30.45	28.46	2.23	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	12:45	8.56	8.13	30.44	28.86	2.53	3
WSR33	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	12:45	8.6	8.1	30.36	28.62	2.79	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.6	12:44	8.56	8.09	30.3	28.84	2.27	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.6	12:44	8.52	8.06	30.18	28.79	2.46	2.5
WSR33	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	12:43	8.49	8.09	30.16	28.64	2.25	3
WSR33	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	6.2	12:43	8.45	8.11	30.25	28.59	2.2	3
WSR36	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	12:28	8.64	8.31	30.66	28.57	2.91	3
WSR36	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	12:28	8.57	8.32	30.85	28.68	3.3	2.5
WSR36	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.25	12:28	8.58	8.33	30.91	28.43	2.85	2.5
WSR36	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.25	12:28	8.63	8.33	30.92	28.56	2.95	3
WSR36	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	5.5	12:27	8.54	8.35	31.02	28.71	2.6	2.5

Location	Date	Weather	Sea Condition	Tidal	Water Level	Depth (m)	Time	DO (mg/L)	pH	Sal (ppt)	Temp (oC)	Turbidity (NTU)	Suspended Solids (mg/L)
WSR36	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	5.5	12:27	8.52	8.29	30.89	28.59	2.18	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	12:14	8.71	8.34	31.17	28.8	2.76	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Ebb	Surface	1	12:14	8.61	8.29	30.94	28.91	2.96	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.8	12:13	8.68	8.32	31.08	28.95	2.93	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Ebb	Middle	3.8	12:13	8.76	8.29	31.19	28.91	2.73	3
WSR37	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	12:12	8.59	8.29	30.85	29	2.5	2.5
WSR37	20220630	Cloudy	Moderate	Mid-Ebb	Bottom	6.6	12:12	8.74	8.3	31.11	29.02	2.25	2.5

Appendix M

HOKLAS Laboratory Certificate



Hong Kong Accreditation Service
香港認可處

Certificate of Accreditation
認可證書

This is to certify that
特此證明

ACUMEN LABORATORY AND TESTING LIMITED
浩科檢測中心有限公司


Lot 12, Tam Kon Shan Road, North Tsing Yi, New Territories, Hong Kong
香港新界青衣北担杆山路12路段

*is accredited by the Hong Kong Accreditation Service (HKAS) to ISO/IEC 17025:2017
for performing specific laboratory activities as listed in the scope of accreditation within the test category of*
獲香港認可處根據ISO/IEC 17025:2017認可
進行載於認可範圍內下述測試類別中的指定實驗室活動

Environmental Testing
環境測試

*This accreditation to ISO/IEC 17025:2017 demonstrates technical competence for a defined scope and
the implementation of a management system relevant to laboratory operation
(see joint IAF-ILAC-ISO Communiqué).*
此項 ISO/IEC 17025:2017 的認可資格證明此實驗室具備指定範疇內所須的技術能力並
實施一套與實驗室運作相關的管理體系
(見國際認可論壇、國際實驗室認可合作組織及國際標準化組織的聯合公報)。

The common seal of HKAS is affixed hereto by the authority of the HKAS Executive
現經香港認可處執行機關授權在此書上香港認可處的印章


SHUM Wai-leung, Executive Administrator
執行幹事 沈偉良
Issue Date : 2 December 2019
簽發日期：二零一九年十二月二日

Registration Number : HOKLAS 241
註冊號碼：

Date of First Registration : 16 July 2014
首次註冊日期：二零一四年七月十六日



Appendix N

Water Quality and Landfill Gas Equipment Calibration Certificate



專業化驗有限公司

QUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong
 Email: info@qualityprotest.com; Website: www.qualityprotest.com
 Tel: (852) 3956 8717; Fax: (852) 3956 3928

REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION

Test Report No. : R-BB050023
 Date of Issue : 13 May 2022
 Page No. : 1 of 2

PART A - CUSTOMER INFORMATION

Acuity Sustainability Consulting Limited
 Unit E, 12/F, Ford Glory Plaza 37-39 Wing
 Hong Street, Cheung Sha Wan
 Kowloon (HK) Hong Kong
 Attn :

PART B - SAMPLE INFORMATION

Name of Equipment : HORIBA U-53
 Manufacturer : HORIBA
 Serial Number : PPHNOMXY
 Date of Received : 06 May 2022
 Date of Calibration : 12 May 2022
 Date of Next Calibration : 11 August 2022

PART C - REFERENCE METHODS/ DOCUMENTS FOR THE CALIBRATION

Test Parameter	Reference Method
Turbidity	APHA 21e 2130B
Dissolved oxygen	APHA 21e 4500 O
pH value	APHA 21e 4500 H+
Salinity	APHA 21e 2520B
Temperature	Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March 2008: Working Thermometer Calibration Procedure

PART D - CALIBRATION RESULT

(1) Turbidity

EXPECTED READING (NTU)	DISPLAY READING (NTU)	TOLERANCE (%)	RESULT
0	0	--	Satisfactory
10	11.0	10.0	Satisfactory
20	20.13	0.6	Satisfactory
100	99.9	-0.1	Satisfactory
800	808	1.0	Satisfactory

Tolerance of Turbidity should be less than ± 10.0 (%)

(2) Dissolved oxygen

EXPECTED READING (MG/L)	DISPLAY READING (MG/L)	TOLERANCE (MG/L)	RESULT
8.02	7.99	-0.03	Satisfactory
5.16	5.43	0.27	Satisfactory
3.74	4.21	0.47	Satisfactory
0.94	1.40	0.46	Satisfactory

Tolerance of Dissolved oxygen should be less than ± 0.5 (mg/L)

(3) pH value

TARGET (PH UNIT)	DISPLAY READING (PH UNIT)	TOLERANCE	RESULT
--------------------	-----------------------------	-----------	--------

--- CONTINUED ON NEXT PAGE ---

AUTHORIZED
SIGNATORY:

LEE Chun-ning

Assistant Manager (Chemical Testing)



專業化驗有限公司

QUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong

Email: info@qualityprotest.com; Website: www.qualityprotest.com

Tel: (852) 3956 8717; Fax: (852) 3956 3928

REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION

Test Report No. : R-BB050023

Date of Issue : 13 May 2022

Page No. : 2 of 2

TARGET (PH UNIT)	DISPLAY READING (PH UNIT)	TOLERANCE	RESULT
4.00	3.99	-0.01	Satisfactory
7.42	7.28	-0.14	Satisfactory
10.01	9.95	-0.06	Satisfactory

Tolerance of pH value should be less than ± 0.2 (pH unit)

(4) Salinity

EXPECTED READING (G/L)	DISPLAY READING (G/L)	TOLERANCE (%)	RESULT
10	10.26	2.60	Satisfactory
20	21.35	6.75	Satisfactory
30	32.54	8.47	Satisfactory

Tolerance of Salinity should be less than ± 10.0 (%)

(5) Temperature


READING OF REF. THERMOMETER (°C)	DISPLAY READING (°C)	TOLERANCE (°C)	RESULT
17.0	17.11	0.11	Satisfactory
24.0	23.99	-0.01	Satisfactory
34.0	33.84	-0.16	Satisfactory

Tolerance of Temperature should be less than ± 2.0 (°C)

Remark(s)

- The "Date of Next Calibration" is recommended according to best practice principals as practiced by QPT or quoted from relevant international standards.
- The results relate only to the calibrated equipment as received
- The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.
- "Displayed Reading" denotes the figure shown on item under calibration/ checking regardless of equipment precision or significant figures.
- The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted from relevant international standards.

--- END OF REPORT ---



專業化驗有限公司
QUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong
Email: info@qualityprotest.com; Website: www.qualityprotest.com
Tel: (852) 3956 8717; Fax: (852) 3956 3928

REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION

Test Report No. : R-BB060014

Date of Issue : 09 June 2022

Page No. : 1 of 2

PART A - CUSTOMER INFORMATION

Acuity Sustainability Consulting Limited
Unit E, 12/F, Ford Glory Plaza 37-39 Wing
Hong Street, Cheung Sha Wan
Kowloon (HK) Hong Kong
Attn :

PART B - SAMPLE INFORMATION

Name of Equipment : HORIBA U-53
Manufacturer : HORIBA
Serial Number : THAUKESL
Date of Received : 07 June 2022
Date of Calibration : 08 June 2022
Date of Next Calibration : 08 September 2022

PART C - REFERENCE METHODS/ DOCUMENTS FOR THE CALIBRATION

Test Parameter	Reference Method
Turbidity	APHA 21e 2130B
Dissolved oxygen	APHA 21e 4500 O
pH value	APHA 21e 4500 H+
Salinity	APHA 21e 2520B
Temperature	Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March 2008: Working Thermometer Calibration Procedure

PART D - CALIBRATION RESULT

(1) Turbidity

EXPECTED READING (NTU)	DISPLAY READING (NTU)	TOLERANCE (%)	RESULT
0	0.1	--	Satisfactory
10	10.1	1.0	Satisfactory
20	20.0	0.0	Satisfactory
100	98.2	-1.8	Satisfactory
800	801.0	0.1	Satisfactory

Tolerance of Turbidity should be less than ± 10.0 (%)

(2) Dissolved oxygen

EXPECTED READING (MG/L)	DISPLAY READING (MG/L)	TOLERANCE (MG/L)	RESULT
7.86	7.87	0.01	Satisfactory
5.34	5.56	0.22	Satisfactory
3.41	3.82	0.41	Satisfactory
1.22	1.47	0.25	Satisfactory


Tolerance of Dissolved oxygen should be less than ± 0.5 (mg/L)

(3) pH value

TARGET (PH UNIT)	DISPLAY READING (PH UNIT)	TOLERANCE	RESULT
------------------	---------------------------	-----------	--------

--- CONTINUED ON NEXT PAGE ---

AUTHORIZED
SIGNATORY:

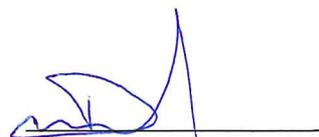
LEE Chun-ning
Assistant Manager (Chemical Testing)



REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION

Test Report No. : R-BB060014
Date of Issue : 09 June 2022
Page No. : 2 of 2

TARGET (PH UNIT)	DISPLAY READING (PH UNIT)	TOLERANCE	RESULT
4.00	3.98	-0.02	Satisfactory
7.42	7.38	-0.04	Satisfactory
10.01	10.06	0.05	Satisfactory

Tolerance of pH value should be less than ± 0.2 (pH unit)

(4) Salinity

EXPECTED READING (G/L)	DISPLAY READING (G/L)	TOLERANCE (%)	RESULT
10	10.20	2.00	Satisfactory
20	20.86	4.30	Satisfactory
30	31.84	6.13	Satisfactory

Tolerance of Salinity should be less than ± 10.0 (%)

(5) Temperature


READING OF REF. THERMOMETER (°C)	DISPLAY READING (°C)	TOLERANCE (°C)	RESULT
16.5	16.91	0.41	Satisfactory
25.0	24.99	-0.01	Satisfactory
33.0	32.75	-0.25	Satisfactory

Tolerance of Temperature should be less than ± 2.0 (°C)

Remark(s)

- The "Date of Next Calibration" is recommended according to best practice principals as practiced by QPT or quoted from relevant international standards.
- The results relate only to the calibrated equipment as received
- The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.
- "Displayed Reading" denotes the figure shown on item under calibration/ checking regardless of equipment precision or significant figures.
- The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted from relevant international standards.

--- END OF REPORT ---



專業化驗有限公司
QUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong
Email: info@qualityprotest.com; Website: www.qualityprotest.com
Tel: (852) 3956 8717; Fax: (852) 3956 3928

REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION

Test Report No. : R-BB060031
Date of Issue : 17 June 2022
Page No. : 1 of 2

PART A - CUSTOMER INFORMATION

Acuity Sustainability Consulting Limited
Unit E, 12/F, Ford Glory Plaza 37-39 Wing
Hong Street, Cheung Sha Wan
Kowloon (HK) Hong Kong
Attn :

PART B - SAMPLE INFORMATION

Name of Equipment : HORIBA U-53
Manufacturer : HORIBA
Serial Number : NEKVM2XU
Date of Received : 15 June 2022
Date of Calibration : 15 June 2022
Date of Next Calibration : 14 September 2022

PART C - REFERENCE METHODS/ DOCUMENTS FOR THE CALIBRATION

Test Parameter	Reference Method
Turbidity	APHA 21e 2130B
Dissolved oxygen	APHA 21e 4500 O
pH value	APHA 21e 4500 H+
Salinity	APHA 21e 2520B
Temperature	Section 6 of international Accreditation New Zealand Technical Guide no. 3 Second edition March 2008: Working Thermometer Calibration Procedure

PART D - CALIBRATION RESULT

(1) Turbidity

EXPECTED READING (NTU)	DISPLAY READING (NTU)	TOLERANCE (%)	RESULT
0	0.00	--	Satisfactory
10	10.70	7.0	Satisfactory
20	21.00	5.0	Satisfactory
100	109.00	9.0	Satisfactory
800	796.00	-0.5	Satisfactory

Tolerance of Turbidity should be less than ± 10.0 (%)

(2) Dissolved oxygen

EXPECTED READING (MG/L)	DISPLAY READING (MG/L)	TOLERANCE	RESULT
8.17	8.20	0.03	Satisfactory
5.58	5.50	-0.08	Satisfactory
3.53	3.30	-0.23	Satisfactory
0.08	0.00	-0.08	Satisfactory

Tolerance of Dissolved oxygen should be less than ± 0.5 (mg/L)

(3) pH value

TARGET (PH UNIT)	DISPLAY READING (PH UNIT)	TOLERANCE	RESULT
------------------	---------------------------	-----------	--------

--- CONTINUED ON NEXT PAGE ---

AUTHORIZED
SIGNATORY:


LEE Chun-ning
Assistant Manager (Chemical Testing)



專業化驗有限公司

QUALITY PRO TEST-CONSULT LIMITED

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong

Email: info@qualityprotest.com; Website: www.qualityprotest.com

Tel: (852) 3956 8717; Fax: (852) 3956 3928

REPORT OF EQUIPMENT PERFORMANCE CHECK/ CALIBRATION

Test Report No. : R-BB060031

Date of Issue : 17 June 2022

Page No. : 2 of 2

TARGET (PH UNIT)	DISPLAY READING (PH UNIT)	TOLERANCE	RESULT
4.00	4.00	0.00	Satisfactory
7.42	7.42	0.00	Satisfactory
10.01	10.16	0.15	Satisfactory

Tolerance of pH value should be less than ± 0.2 (pH unit)

(4) Salinity

EXPECTED READING (G/L)	DISPLAY READING (G/L)	TOLERANCE (%)	RESULT
10	9.04	-9.60	Satisfactory
20	18.93	-5.35	Satisfactory
30	29.25	-2.50	Satisfactory

Tolerance of Salinity should be less than ± 10.0 (%)

(5) Temperature

READING OF REF. THERMOMETER (°C)	DISPLAY READING (°C)	TOLERANCE	RESULT
16.0	16.07	0.07	Satisfactory
24.0	23.99	-0.01	Satisfactory
34.0	33.73	-0.27	Satisfactory

Tolerance of Temperature should be less than ± 2.0 (°C)

Remark(s)

- The "Date of Next Calibration" is recommended according to best practice principals as practiced by QPT or quoted form relevant international standards.
- The results relate only to the calibrated equipment as received
- The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.
- "Displayed Reading" denotes the figure shown on item under calibration/ checking regardless of equipment precision or significant figures.
- The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted form relevant international standards.

--- END OF REPORT ---

Appendix O

Exceedance Report (s)

Incident Report on Action Level or Limit Level Non-Compliance


Project	Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant		
Date	7 June 2022 (Lab result received on 13 June 2022)		
Time	09:00-12:30 (Mid-Flood) and 15:30-19:00 (Mid-Ebb)		
Mid-Flood			
Monitoring Location	<p>WSR2, WSR4</p>		
Parameter	Suspended Solid (SS)		
Action & Limit Levels	Action Level		Limit Level
	> 5.0 mg/L		> 6.0 mg/L
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	5.3 mg/L (WSR 2) 6.7 mg/L (WSR 4)	3.5 mg/L (CE) 3.5 mg/L (CF)	3.3 mg/L (WSR 1) 4.0 mg/L (WSR 3) 3.8 mg/L (WSR 16) 4.8 mg/L (WSR 33) 4.5 mg/L (WSR 36) 4.7 mg/L (WSR 37)
Possible reason for Action or Limit Level Non-compliance	<p>Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson</p> <p>Intake Shaft Area: marine construction activities, namely 1) One derrick barge supporting the divers to install rigging on the TBM body underwater inside the Intake Shaft 2) Another derrick barge moored aside to the working barge assisting material delivery</p> <p>Marine construction activities with contact with water: 1) One derrick barge supporting the divers to install rigging on the TBM body underwater inside the Intake Shaft</p> <p>Marine vessels on 7 June 2022:</p> <ul style="list-style-type: none"> • Derrick barge x2 (Intake Shaft) • N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Southeast to Northwest at waters to the west side of Tit Cham Chau; and from Northeast to Southwest at waters to the east side of Tit Cham Chau.</p>		

Stations WSR2 and WSR4 were located distant from the construction site and the possibility of being affected by marine construction activities was considered limited. SS exceedances were however observed at WSR2 (5.3 mg/L) and WSR4 (6.7 mg/L). According to the information provided by the Contactor, marine construction activity with contact with water was conducted at Intake Shaft (WSR36) on 7 June 2022. However, no SS exceedance was observed at WSR36 (4.5 mg/L) Hence, the SS exceedances at WSR2 and WSR4 may be resulted from natural factors.


According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 7 June 2022.

Conditions of the protective silt curtain at the inland water outfall was satisfactory on 7 June 2022.


Mid-Ebb

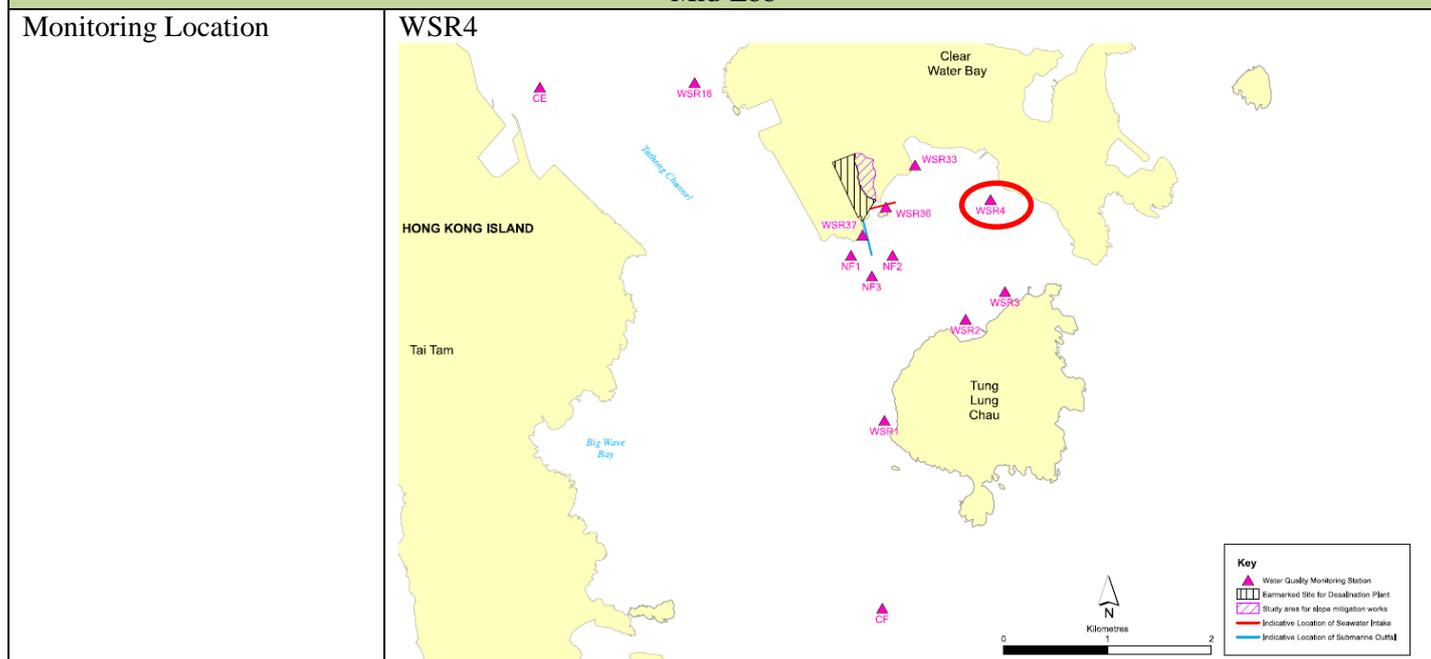

Monitoring Location	WSR4		
Parameter	Suspended Solid (SS)		
Action & Limit Levels	Action Level		Limit Level
	> 5.4 mg/L		> 6.0 mg/L
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	9.7 mg/L (WSR 4)	4.5 mg/L (CE) 3.9 mg/L (CF)	5.0 mg/L (WSR 1) 4.2 mg/L (WSR 2) 4.8 mg/L (WSR 3) 5.3 mg/L (WSR 16) 4.5 mg/L (WSR 33) 4.7 mg/L (WSR 36) 4.3 mg/L (WSR 37)
Possible reason for Action or Limit Level Non-compliance	Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson		
	Intake Shaft Area: marine construction activities, namely 1) One derrick barge supporting the divers to install rigging on the TBM body underwater inside the Intake Shaft 2) Another derrick barge moored aside to the working barge assisting material delivery		
	Marine construction activities with contact with water: 1) One derrick barge supporting the divers to install rigging on the TBM body underwater inside the Intake Shaft		

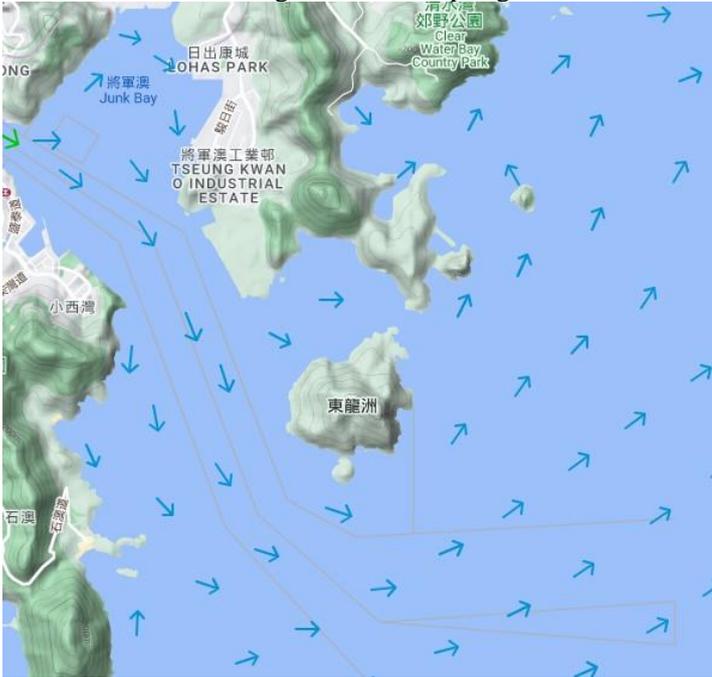
	<p>Marine vessels on 7 June 2022:</p> <ul style="list-style-type: none"> • Derrick barge x2 (Intake Shaft) • N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Northwest to Southeast at waters to the west side of Tit Cham Chau; and from East to West at waters to the east side of Tit Cham Chau.</p> <p>Station WSR4 was located distant from the construction site and the possibility of being affected by marine construction activities was considered limited. SS exceedances were however observed at WSR4 (9.7 mg/L). According to the information provided by the Contactor, marine construction activity with contact with water was conducted at Intake Shaft (WSR36) on 7 June 2022. However, no SS exceedance was observed at WSR36 (4.7 mg/L). Hence, the SS exceedance at WSR4 may be resulted from natural factors.</p> <p>According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 7 June 2022.</p> <p>Conditions of the protective silt curtain at the inland water outfall was satisfactory on 7 June 2022.</p>
<p>Remarks</p>	<p>Current direction during mid-ebb sampling on 7 June 2022:</p>  <p>The map shows the Tseung Kwan O area with various locations labeled in Chinese and English. Blue arrows indicate the current direction during mid-ebb sampling. The current flows generally from the northwest towards the southeast in the western part of the area, and from east to west in the eastern part. Key locations include Junk Bay, OHAS PARK, TSEUNG KWAN O INDUSTRIAL ESTATE, and 東龍洲 (Tung Lung Chau).</p>

Current direction during mid-flood sampling on 7 June 2022:

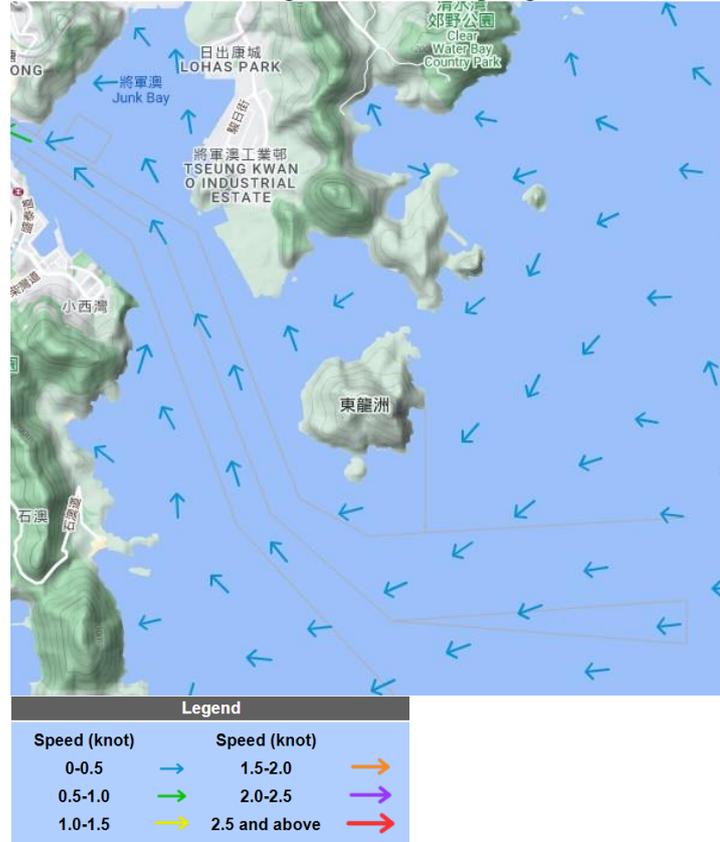

(Sourced from <http://current.hydro.gov.hk/en/map.html>)

Supporting Photo 1 (Sea Conditions at WSR2)

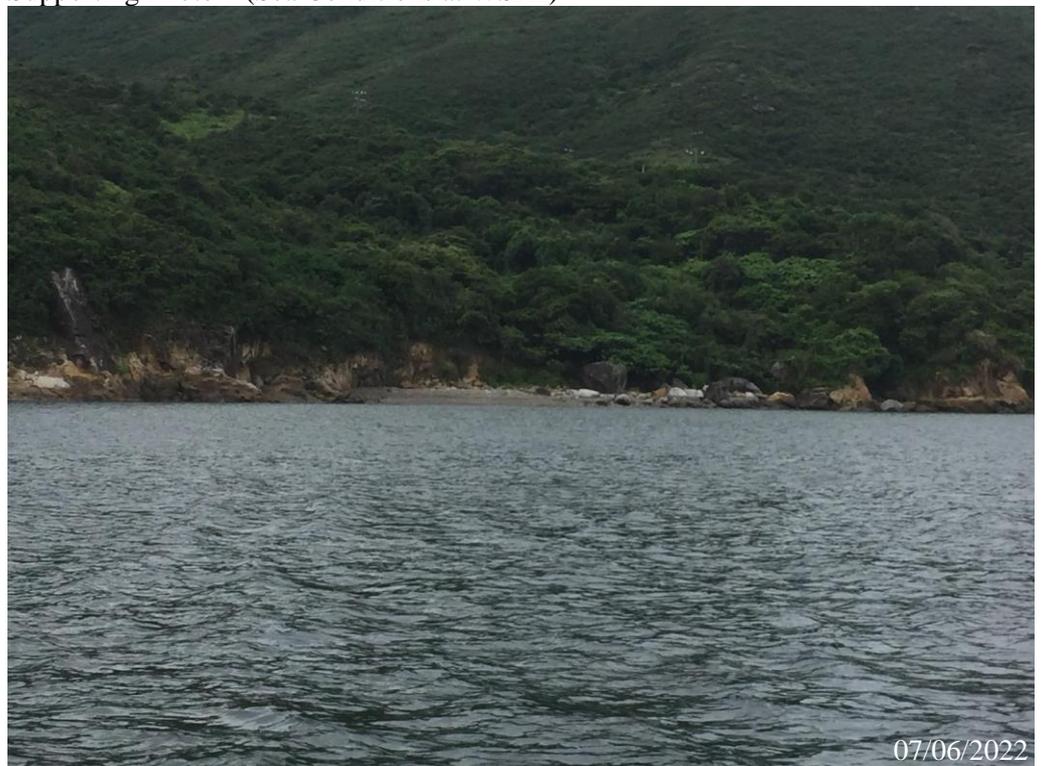

Supporting Photo 2 (Sea Conditions at WSR4)



Supporting Photo 3 (Sea Conditions at CF)



Supporting Photo 4 (Sea Conditions at CE)



Supporting Photo 5 (Sea Conditions at Intake Shaft Area)



	<p>Supporting Photo 7 (Sea Conditions at Outfall Shaft Area)</p>  <p>07/06/2022</p>
Prepared by	Howard Chan
Date	15 June 2022

Incident Report on Action Level or Limit Level Non-Compliance

Project	Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant		
Date	11 June 2022 (Lab result received on 16 June 2022)		
Time	14:30-18:00 (Mid-Flood) and 08:00-11:30 (Mid-Ebb)		
Mid-Ebb			
Monitoring Location	<p>WSR3, WSR4</p> <p>The map shows the Tseung Kwan O area, including Hong Kong Island and Tung Lung Chau. Monitoring stations are marked with triangles. WSR3 and WSR4 are circled in red. The desalination plant site is marked with a hatched area. A key explains the symbols: Water Quality Monitoring Station (triangle), Examined Site for Desalination Plant (hatched area), Study area for slope mitigation works (dotted area), Indicative Location of Seawater Intake (red circle), and Indicative Location of Submarine Outfall (blue line). A scale bar shows 0 to 2 Kilometres.</p>		
Parameter	Suspended Solid (SS)		
Action & Limit Levels	Action Level		Limit Level
	> 5.0 mg/L		> 6.0 mg/L
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	8.7 mg/L (WSR 3) 6.0 mg/L (WSR 4)	3.7 mg/L (CE) 3.8 mg/L (CF)	3.0 mg/L (WSR 1) 3.3 mg/L (WSR 2) 3.5 mg/L (WSR 16) 3.7 mg/L (WSR 33) 3.7 mg/L (WSR 36) 4.2 mg/L (WSR 37)
Possible reason for Action or Limit Level Non-compliance	<p>Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson</p> <p>Intake Shaft Area: marine construction activities, namely 1) One derrick barge supporting the divers to install rigging on the TBM body underwater inside the Intake Shaft 2) Another derrick barge moored aside to the working barge assisting material delivery</p> <p>Marine construction activities with contact with water: 1) One derrick barge supporting the divers to install rigging on the TBM body underwater inside the Intake Shaft</p> <p>Marine vessels on 11 June 2022:</p> <ul style="list-style-type: none"> • Derrick barge x2 (Intake Shaft) • N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Northwest to Southeast at waters to the west side of Tit Cham Chau; and from Southwest to Northeast at waters to the east side of Tit Cham Chau.</p>		

Stations WSR3 and WSR4 were located distant from the construction site and the possibility of being affected by marine construction activities was considered limited. SS exceedances were however observed at WSR3 (8.7 mg/L) and WSR4 (6.0 mg/L). According to the information provided by the Contactor, marine construction activity with contact with water was conducted at Intake Shaft (WSR36) on 11 June 2022. However, no SS exceedance was observed at WSR36 (3.7 mg/L). Hence, the SS exceedances at WSR3 and WSR4 may be resulted from natural factors.

According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 11 June 2022.

Conditions of the protective silt curtain at the inland water outfall was satisfactory on 11 June 2022.

Remarks

Current direction during mid-ebb sampling on 11 June 2022:

Legend	
Speed (knot)	Speed (knot)
0-0.5	1.5-2.0
0.5-1.0	2.0-2.5
1.0-1.5	2.5 and above

(Sourced from <http://current.hydro.gov.hk/en/map.html>)

Supporting Photo 1 (Sea Conditions at WSR3)



Supporting Photo 2 (Sea Conditions at WSR4)



Supporting Photo 3 (Sea Conditions at CF)



Supporting Photo 4 (Sea Conditions at CE)



Supporting Photo 5 (Sea Conditions at Intake Shaft Area)



Supporting Photo 6 (Sea Conditions at Outfall Shaft Area)



Prepared by	Howard Chan
Date	17 June 2022

Incident Report on Action Level or Limit Level Non-Compliance


Project	Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant		
Date	13 June 2022 (Lab result received on 20 June 2022)		
Time	15:00-19:00 (Mid-Flood) and 09:22-12:52 (Mid-Ebb)		
Mid-Flood			
Monitoring Location	WSR33, WSR36 		
Parameter	Suspended Solid (SS)		
Action & Limit Levels	Action Level		Limit Level
	> 7.1 mg/L		> 7.7 mg/L
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	15.7 mg/L (WSR 33) 11.7 mg/L (WSR 36)	4.2 mg/L (CE) 5.9 mg/L (CF)	4.5 mg/L (WSR 1) 5.2 mg/L (WSR 2) 3.5 mg/L (WSR 3) 4.6 mg/L (WSR 4) 5.7 mg/L (WSR 16) 4.2 mg/L (WSR 37)
Possible reason for Action or Limit Level Non-compliance	<p>Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson</p> <p>Intake Shaft Area: marine construction activities, namely 1) the derrick barge moored aside the Intake Shaft assisting the rigging and material delivery for the TBM retrieval work 2) the crane barge rigged up and hoisted the TBM out of the Intake Shaft</p> <p>Marine construction activities with contact with water: 1) the crane barge rigged up and hoisted the TBM out of the Intake Shaft</p> <p>Marine vessels on 13 June 2022:</p> <ul style="list-style-type: none"> • Derrick barge x1, Crane barge x1 (Intake Shaft) • N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Southeast to Northwest at waters to the west side of Tit Cham Chau; and from Northeast to Southwest at waters to the east side of Tit Cham Chau.</p>		

According to the information provided by the Contactor, marine construction activity with contact with water was conducted at Intake Shaft (WSR36) on 13 June 2022. SS exceedances were observed at monitoring stations WSR33 (15.7 mg/L) and WSR36 (11.7 mg/L). During the marine construction activity, the Intake Shaft was enclosed by silt curtains. WSR33 was located upstream of WSR36 during mid-flood tide and SS exceedance was also observed at WSR33. Considering that the water quality mitigation measures were properly implemented during the marine construction activities and the SS level at WSR36 may be affected by the upstream monitoring station WSR33, so the SS exceedances at WSR33 and WSR36 were considered non-project related.

According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 13 June 2022.

Conditions of the protective silt curtain at the inland water outfall was satisfactory on 13 June 2022.

Mid-Ebb

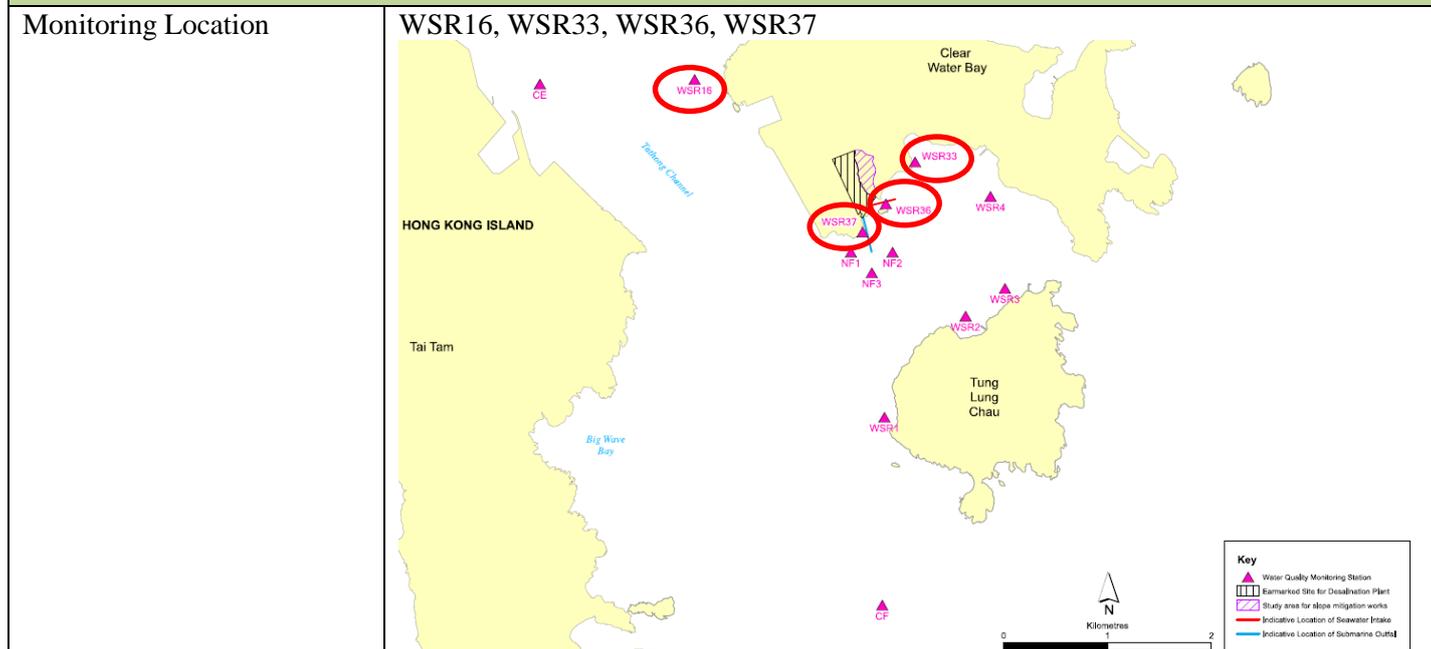

Parameter	Suspended Solid (SS)		
------------------	----------------------	--	--

Action & Limit Levels	Action Level	Limit Level
	> 5.0 mg/L	> 6.0 mg/L

Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	5.7 mg/L (WSR 16) 7.7 mg/L (WSR 33) 9.8 mg/L (WSR 36) 6.0 mg/L (WSR 37)	3.3 mg/L (CE) 4.0 mg/L (CF)	3.5 mg/L (WSR 1) 3.3 mg/L (WSR 2) 4.4 mg/L (WSR 3) 5.0 mg/L (WSR 4)

Possible reason for Action or Limit Level Non-compliance	Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson
	Intake Shaft Area: marine construction activities, namely 1) the derrick barge moored aside the Intake Shaft assisting the rigging and material delivery for the TBM retrieval work 2) the crane barge rigged up and hoisted the TBM out of the Intake Shaft
	Marine construction activities with contact with water: 1) the crane barge rigged up and hoisted the TBM out of the Intake Shaft

	<p>Marine vessels on 13 June 2022:</p> <ul style="list-style-type: none"> • Derrick barge x1, Crane barge x1 (Intake Shaft) N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Northwest to Southeast at waters to the west side of Tit Cham Chau; and from southwest to northeast at waters to the east side of Tit Cham Chau.</p> <p>Station WSR16 was located distant from the construction site and the possibility of being affected by marine construction activities was considered limited. SS exceedances were however observed at WSR16 (5.7 mg/L).</p> <p>According to the information provided by the Contactor, marine construction activity with contact with water was conducted at Intake Shaft (WSR36) on 13 June 2022. SS exceedances were observed at monitoring stations WSR33 (7.7 mg/L), WSR36 (9.8 mg/L) and WSR37 (6.0mg/L). During the marine construction activity, small section of silt curtain at the Intake Shaft was detached to cope with rigging & anchor wiring. No silt plume was observed around and inside the Intake Shaft while the TBM body being lifted up.</p> <p>According to the Hong Kong Observatory Daily Rainfall record on 12 June 2022, rainfall was recorded at Tseung Kwan O, the rainfall may lead to release of SS content from the soil of nearby lands (e.g. Country park, fill bank). Considering that the water quality mitigation measures were properly implemented during the marine construction activities and the SS level may be affected by the unstable weather condition on 12 June 2022, so the SS exceedances at WSR16, WSR33, WSR36 and WSR37 were considered non- project related.</p> <p>According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 13 June 2022.</p> <p>Conditions of the protective silt curtain at the inland water outfall was satisfactory on 13 June 2022.</p>
<p>Remarks</p>	<p>Current direction during mid-flood sampling on 13 June 2022:</p> 

Current direction during mid-ebb sampling on 13 June 2022:



Legend			
Speed (knot)		Speed (knot)	
0-0.5	→	1.5-2.0	→
0.5-1.0	→	2.0-2.5	→
1.0-1.5	→	2.5 and above	→

(Sourced from <http://current.hydro.gov.hk/en/map.html>)

Supporting Photo 1 (Sea Conditions at WSR16)



Supporting Photo 2 (Sea Conditions at WSR33)



Supporting Photo 3 (Sea Conditions at WSR36)



Supporting Photo 4 (Sea Conditions at WSR37)



Supporting Photo 5 (Sea Conditions at CF)



Supporting Photo 6 (Sea Conditions at CE)



Supporting Photo 7 (Sea Conditions at Intake Shaft Area)



Supporting Photo 8 (Sea Conditions at Outfall Shaft Area)




13/06/2022


Supporting Photo 9 (Hong Kong Observatory Rainfall Record on 12 June 2022)

2022年6月12日等雨量線圖

2022年6月12日的總雨量 (基於雨量計及雷達數據)

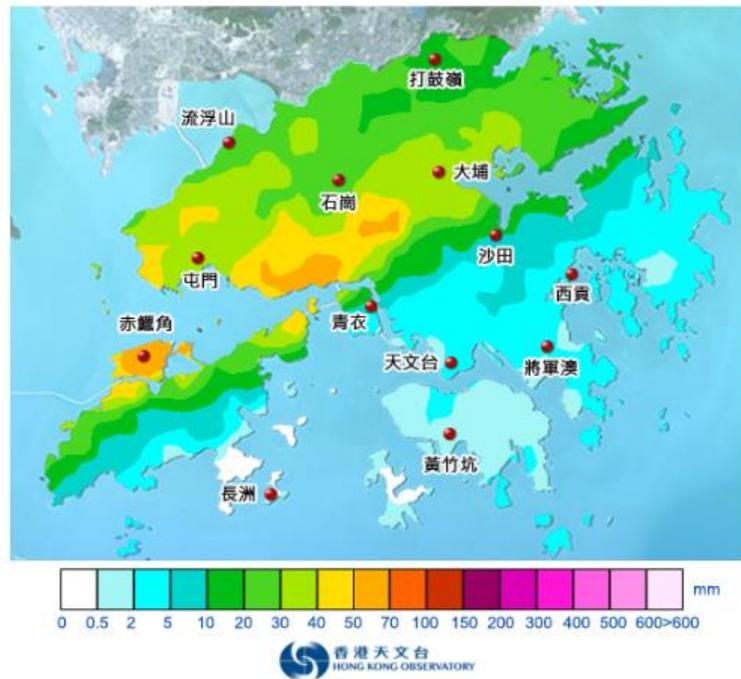

Supporting Photo 10 (Marine construction works at Intake Shaft)

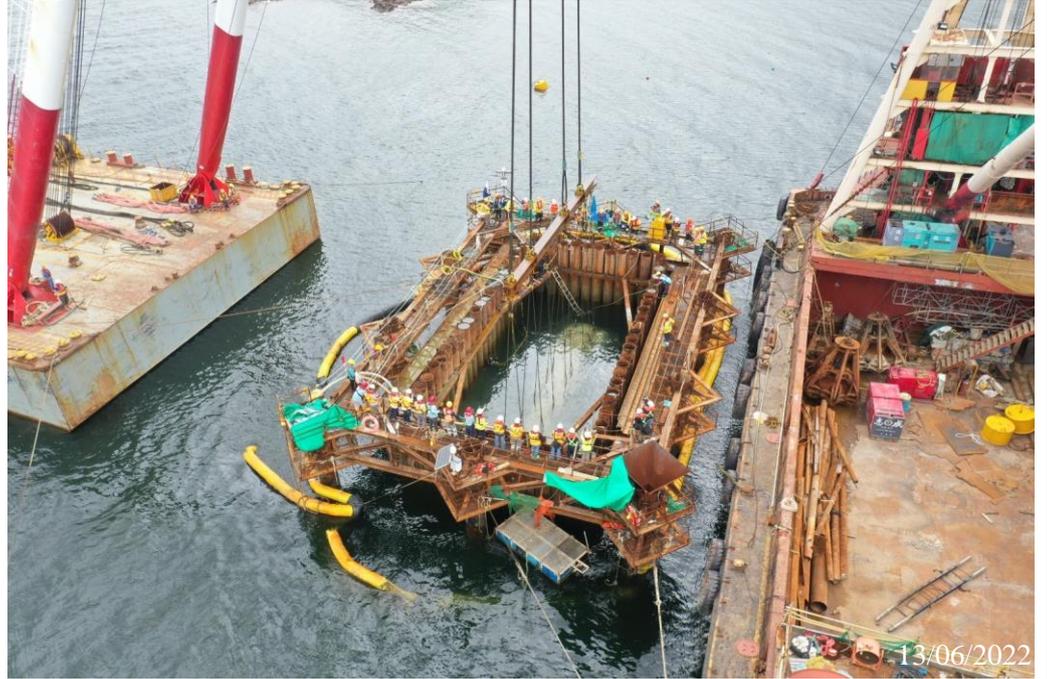

Supporting Photo 11 (Marine construction works at Intake Shaft)



Prepared by	Howard Chan
Date	23 June 2022

Incident Report on Action Level or Limit Level Non-Compliance

Project	Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant		
Date	15 June 2022 (Lab result received on 22 June 2022)		
Time	16:44-19:00 (Mid-Flood) and 10:58-14:28 (Mid-Ebb)		
Mid-Ebb			
Monitoring Location	<p>WSR16</p>		
Parameter	Suspended Solid (SS)		
Action & Limit Levels	Action Level		Limit Level
	> 5.0 mg/L		> 6.0 mg/L
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	8.1 mg/L (WSR 16)	2.8 mg/L (CE) 3.1 mg/L (CF)	2.9 mg/L (WSR 1) 2.9 mg/L (WSR 2) 3.0 mg/L (WSR 3) 3.5 mg/L (WSR 4) 2.9 mg/L (WSR 33) 2.9 mg/L (WSR 36) 2.8 mg/L (WSR 37)
Possible reason for Action or Limit Level Non-compliance	<p>Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson</p> <p>Intake Shaft Area: marine construction activities, namely 1) Nil</p> <p>Marine construction activities with contact with water: 1) Nil</p> <p>Marine vessels on 15 June 2022:</p> <ul style="list-style-type: none"> • N/A (Intake Shaft) • N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Northwest to Southeast at waters to the west side of Tit Cham Chau; and from Southwest to Northeast at waters to the east side of Tit Cham Chau.</p> <p>Station WSR16 was located distant from the construction site and the possibility of being affected by marine construction activities was considered limited. SS exceedance was however observed at WSR16 (8.1 mg/L). According to the information provided</p>		

by the Contactor, TBM retrieval work at Intake Shaft was successfully completed on 13 June 2022, no marine construction work was conducted at Intake and Outfall Shaft on 15 June 2022. SS exceedance was observed at WSR16, however, no SS exceedance was observed at WSR36 (Intake Shaft) and WSR37 (Outfall Shaft). Hence, the SS exceedances at WSR16 may be resulted from natural factors.

According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 15 June 2022.

Conditions of the protective silt curtain at the inland water outfall was satisfactory on 15 June 2022.

Remarks

Current direction during mid-ebb sampling on 15 June 2022:

Legend			
Speed (knot)	Color	Speed (knot)	Color
0-0.5	Blue arrow	1.5-2.0	Orange arrow
0.5-1.0	Green arrow	2.0-2.5	Purple arrow
1.0-1.5	Yellow arrow	2.5 and above	Red arrow

(Sourced from <http://current.hydro.gov.hk/en/map.html>)

Supporting Photo 1 (Sea Conditions at WSR16)



Supporting Photo 2 (Sea Conditions at CF)



Supporting Photo 3 (Sea Conditions at CE)



Supporting Photo 4 (Sea Conditions at Intake Shaft Area)



	<p>Supporting Photo 5 (Sea Conditions at Outfall Shaft Area)</p>  <p>15/06/2022</p>
Prepared by	Howard Chan
Date	23 June 2022

Incident Report on Action Level or Limit Level Non-Compliance

Project	Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant		
Date	17 June 2022 (Lab result received on 22 June 2022)		
Time	08:00-12:48 (Mid-Flood) and 12:48-16:18 (Mid-Ebb)		
Mid-Ebb			
Monitoring Location	<p>WSR1</p> <p>Key</p> <ul style="list-style-type: none"> ▲ Water Quality Monitoring Station ▭ Marked Site for Desalination Plant ▨ Study area for slope mitigation works — Indicative Location of Seawater Intake — Indicative Location of Submarine Outfall 		
Parameter	Suspended Solid (SS)		
Action & Limit Levels	Action Level		Limit Level
	> 6.4 mg/L		> 6.9 mg/L
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	7.7 mg/L (WSR1)	5.3 mg/L (CE) 5.0 mg/L (CF)	2.9 mg/L (WSR2) 2.9 mg/L (WSR3) 2.8 mg/L (WSR4) 3.2 mg/L (WSR16) 4.3 mg/L (WSR33) 2.8 mg/L (WSR36) 2.8 mg/L (WSR37)
Possible reason for Action or Limit Level Non-compliance	<p>Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson</p> <p>Intake Shaft Area: marine construction activities, namely 1) Nil</p> <p>Marine construction activities with contact with water: 1) Nil</p> <p>Marine vessels on 17 June 2022:</p> <ul style="list-style-type: none"> • N/A (Intake Shaft) • N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Northwest to Southeast at waters to the west side of Tit Cham Chau; and from Southwest to Northeast at waters to the east side of Tit Cham Chau.</p>		

Station WSR1 was located distant from the construction site and the possibility of being affected by marine construction activities was considered limited. SS exceedance was however observed at WSR1 (7.7 mg/L). According to the information provided by the Contactor, no marine construction activity was conducted at Intake and Outfall Shaft on 17 June 2022. No SS exceedance was observed at WSR36 (Intake Shaft) and WSR37 (Outfall Shaft). Hence, the SS exceedance at WSR1 may be resulted from natural factors.

According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 17 June 2022.

Conditions of the protective silt curtain at the inland water outfall was satisfactory on 17 June 2022.

Remarks

Current direction during mid-ebb sampling on 17 June 2022:

Legend	
Speed (knot)	Speed (knot)
0-0.5	1.5-2.0
0.5-1.0	2.0-2.5
1.0-1.5	2.5 and above

(Sourced from <http://current.hydro.gov.hk/en/map.html>)

Supporting Photo 1 (Sea Conditions at WSR1)



Supporting Photo 2 (Sea Conditions at CF)



Supporting Photo 3 (Sea Conditions at CE)




Supporting Photo 4 (Sea Conditions at Intake Shaft Area)



	<p>Supporting Photo 5 (Sea Conditions at Outfall Shaft Area)</p>  <p>17/06/2022</p>
Prepared by	Howard Chan
Date	23 June 2022

Incident Report on Action Level or Limit Level Non-Compliance

Project	Design, Build and Operate First Stage of Tseung Kwan O Desalination Plant		
Date	28 June 2022 (Lab result received on 4 July 2022)		
Time	16:00-19:00 (Mid-Flood) and 10:00-13:30 (Mid-Ebb)		
Mid-Ebb			
Monitoring Location	<p>WSR2</p>		
Parameter	Suspended Solid (SS)		
Action & Limit Levels	Action Level		Limit Level
	> 5.0 mg/L		> 6.0 mg/L
Measurement Level	Impact Station(s) of Exceedance	Control Stations	Impact Station(s) without Exceedance
	5.2 mg/L (WSR2)	3.8 mg/L (CE) 4.7 mg/L (CF)	4.3 mg/L (WSR1) 4.0 mg/L (WSR3) 4.7 mg/L (WSR4) 4.5 mg/L (WSR16) 5.0 mg/L (WSR33) 4.8 mg/L (WSR36) 4.3 mg/L (WSR37)
Possible reason for Action or Limit Level Non-compliance	<p>Outfall Shaft Area: marine construction activities, namely 1) dewatering pump operation inside the outfall caisson</p> <p>Intake Shaft Area: marine construction activities, namely 1) Derrick barge working for the rockfill retrieval by grab inside the Intake Shaft</p> <p>Marine construction activities with contact with water: 1) Derrick barge working for the rockfill retrieval by grab inside the Intake Shaft</p> <p>Marine vessels on 28 June 2022:</p> <ul style="list-style-type: none"> • Derrick barge x 1 (Intake Shaft) • N/A (Outfall Shaft) <p>Dominating sea current direction was found to be from Northwest to Southeast at waters to the west side of Tit Cham Chau; and from West to East at waters to the east side of Tit Cham Chau.</p>		

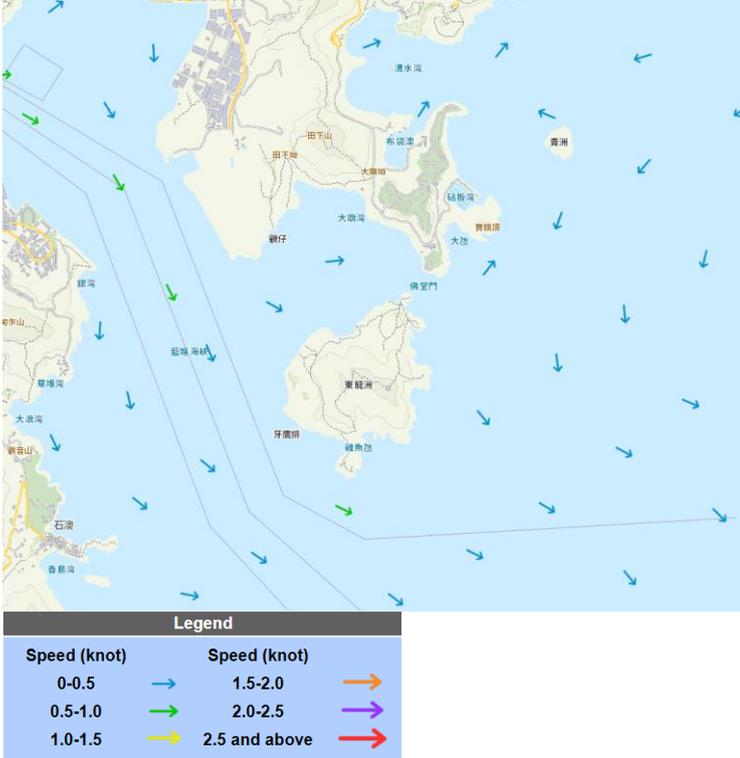	<p>Station WSR2 was located distant from the construction site and the possibility of being affected by marine construction activities was considered limited. SS exceedance was however observed at WSR2 (5.2 mg/L). According to the information provided by the Contactor, marine construction activity was conducted at Intake Shaft (WSR36) on 28 June 2022. No SS exceedance was observed at WSR36 (4.8 mg/L). Hence, the SS exceedance at WSR2 may be resulted from natural factors.</p> <p>According to the field observation by sampling team during sampling event, no silt plume was observed at the Contract site on 28 June 2022.</p> <p>Conditions of the protective silt curtain at the inland water outfall was satisfactory on 28 June 2022.</p>
<p>Remarks</p>	<p>Current direction during mid-ebb sampling on 28 June 2022:</p>  <p>(Sourced from http://current.hydro.gov.hk/en/map.html)</p>

Supporting Photo 1 (Sea Conditions at WSR2)



Supporting Photo 2 (Sea Conditions at CF)



Supporting Photo 3 (Sea Conditions at CE)



Supporting Photo 4 (Sea Conditions at Intake Shaft Area)



	<p>Supporting Photo 5 (Sea Conditions at Outfall Shaft Area)</p>  <p>28/06/2022</p>
Prepared by	Howard Chan
Date	6 July 2022